



1431 FRANKLIN ST

Office Entitlement - 11/22/2022


PLN20124

RECEIVED 12-15-2022

TIDEWATER

LARGE
architecture




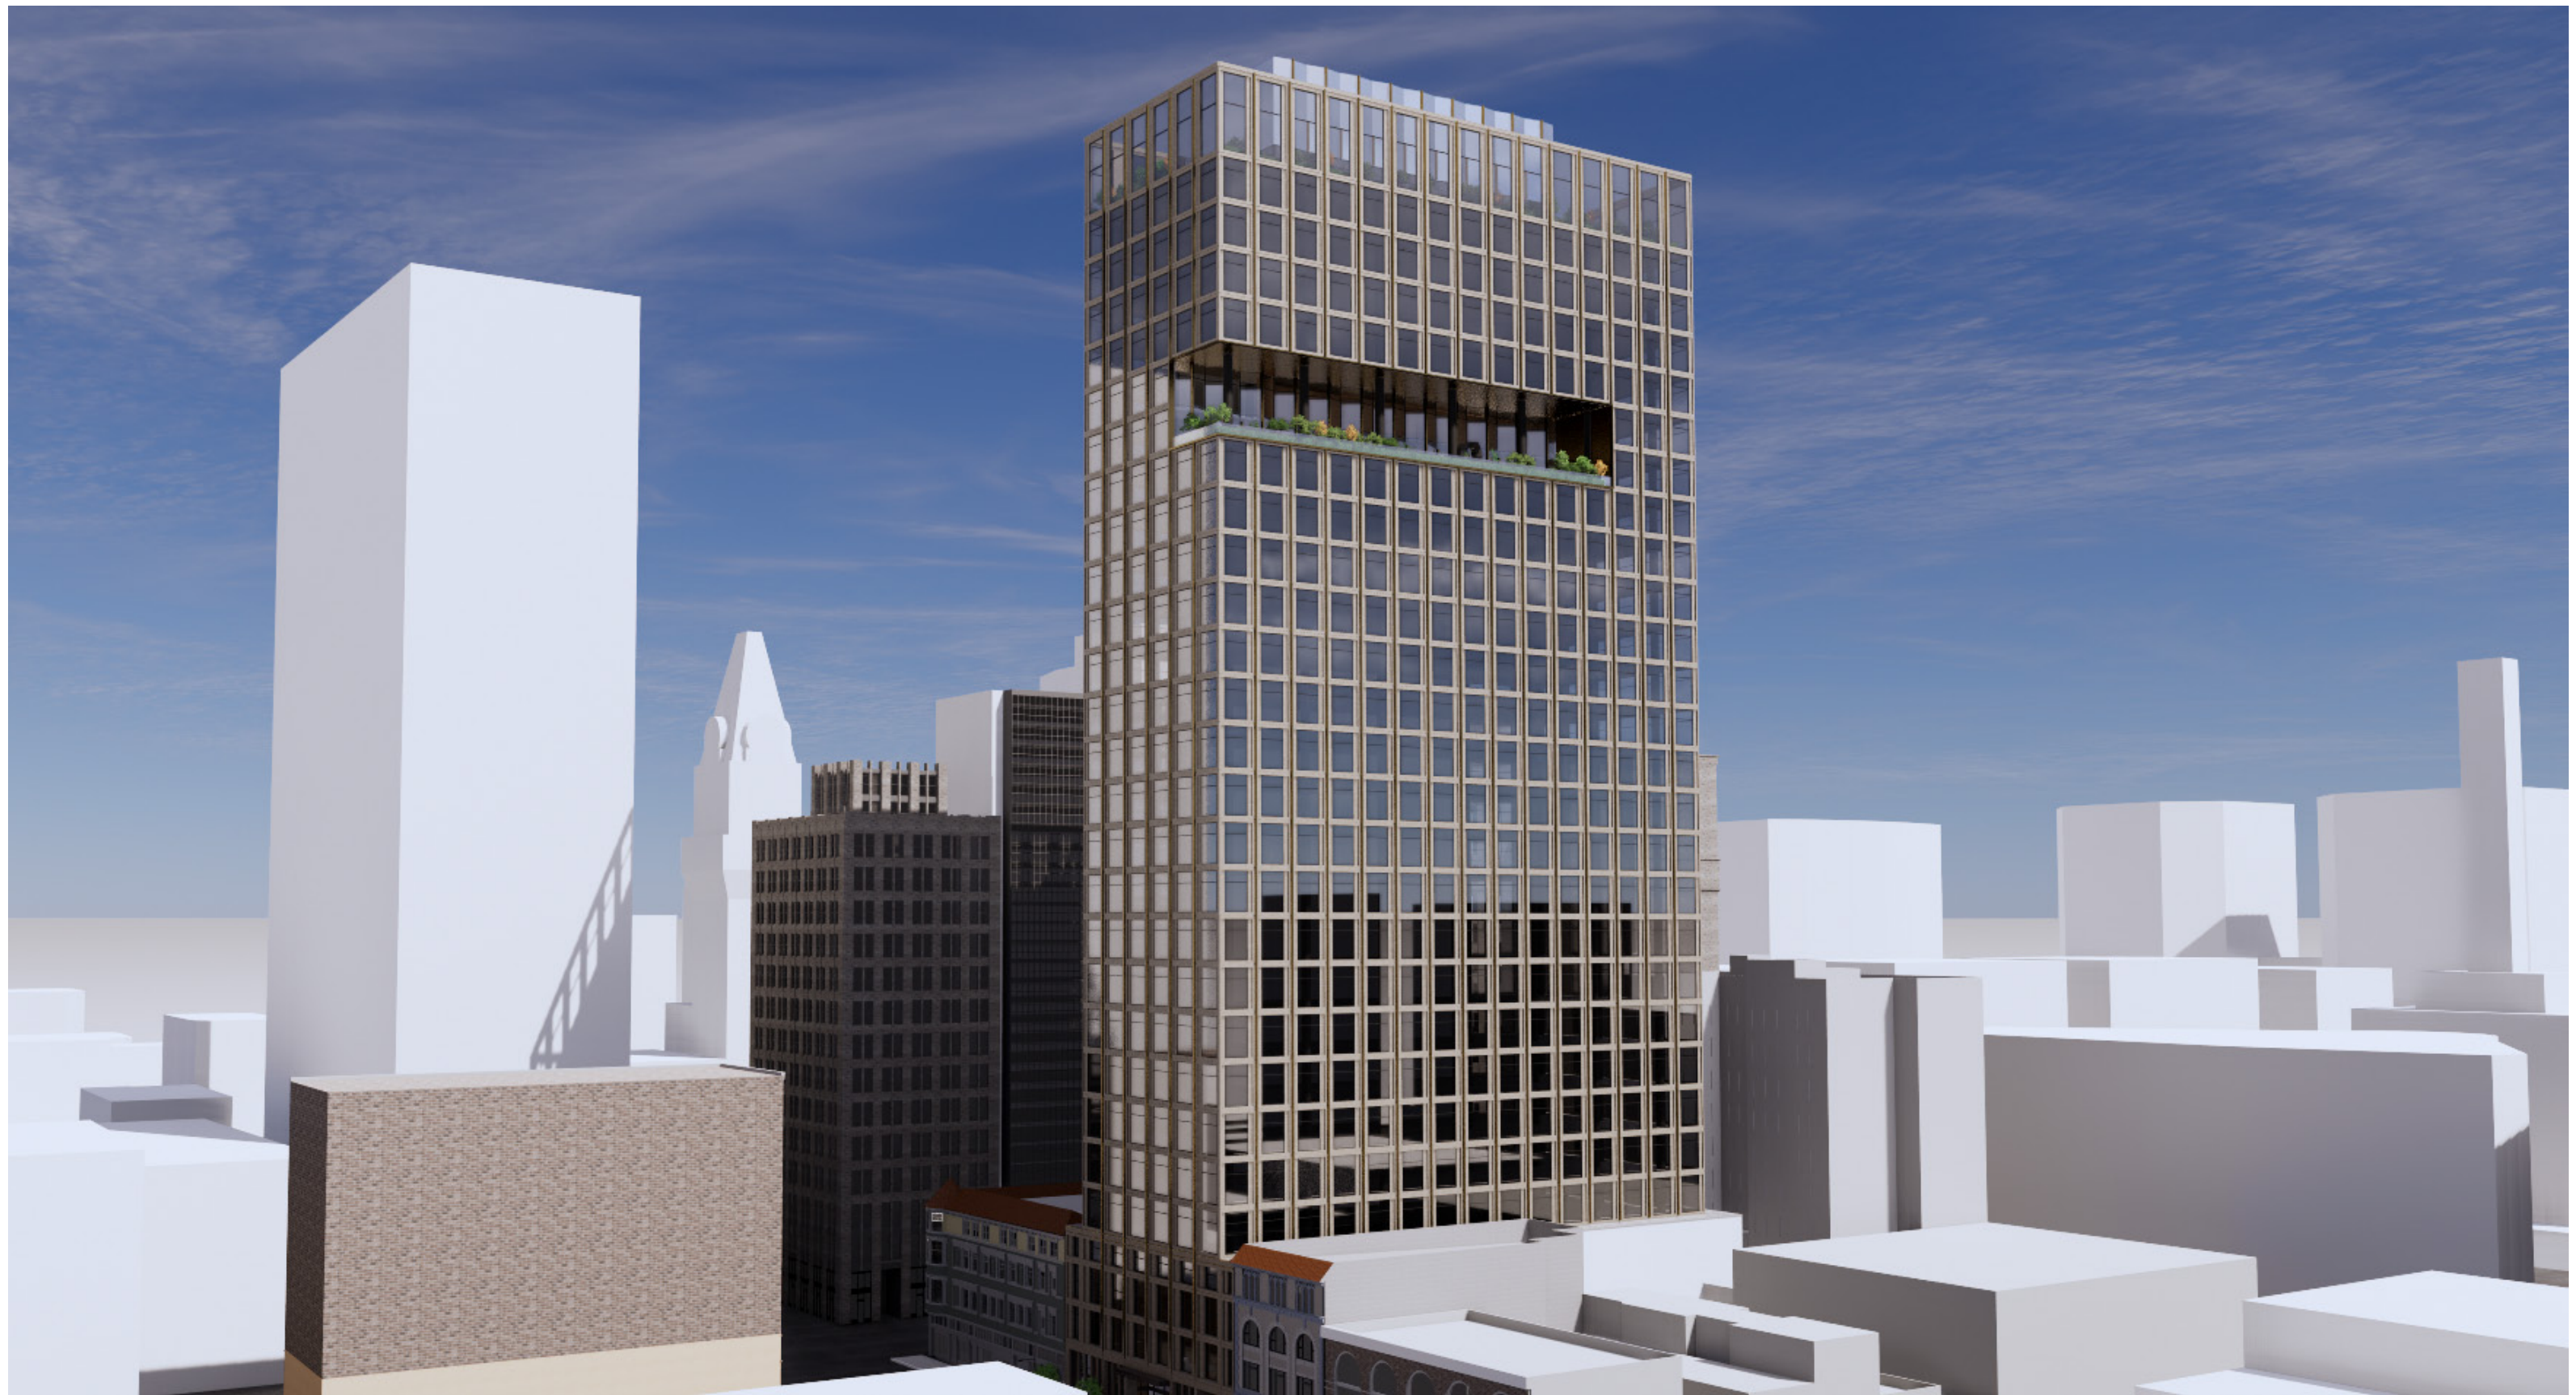

CONTENTS

SITE	5	PLANS & SECTIONS	51
Plan	6	Ground Floor Plan	52
Context Axonometric	7	Mezzanine Plan	53
Context Photos	9	Level 2 Plan	54
		Level 3 Plan	55
OFFICE TOWER PROGRAM	16	Level 4 Plan	56
		Level 5 Plan	57
DESIGN PARTI	18	Typ. Office Plan	58
Massing Diagram	19	Amenity Level Plan	59
Historical Reference	20	Rooftop Plan	60
Building Materials	22	Section	61
		Elevations	62
TOWER DESIGN ELEMENTS	23	Exterior Lighting	66
View From Franklin	24	Signage	67
Lobby & Garage Section	25	Building Matrix	68
Lobby Entry	26		
Lobby Details	27	APPENDIX	69
Upper Level Amenity	28	Shadow Studies	70
Facade Details	29	Bike Parking	74
Rooftop Amenity	30	Irrigation Plan	75
		Landscape Plan	77
OFFICE BUILDING CORE	31	Site Survey	80
Core Location	32	Storm Water Plan	81
Core Design	33	Erosion Control	82
		LEED Checklist	84
OVERALL RENDERS	35	CA Standards Code	85
PROJECT IN CONTEXT	40		

SITE

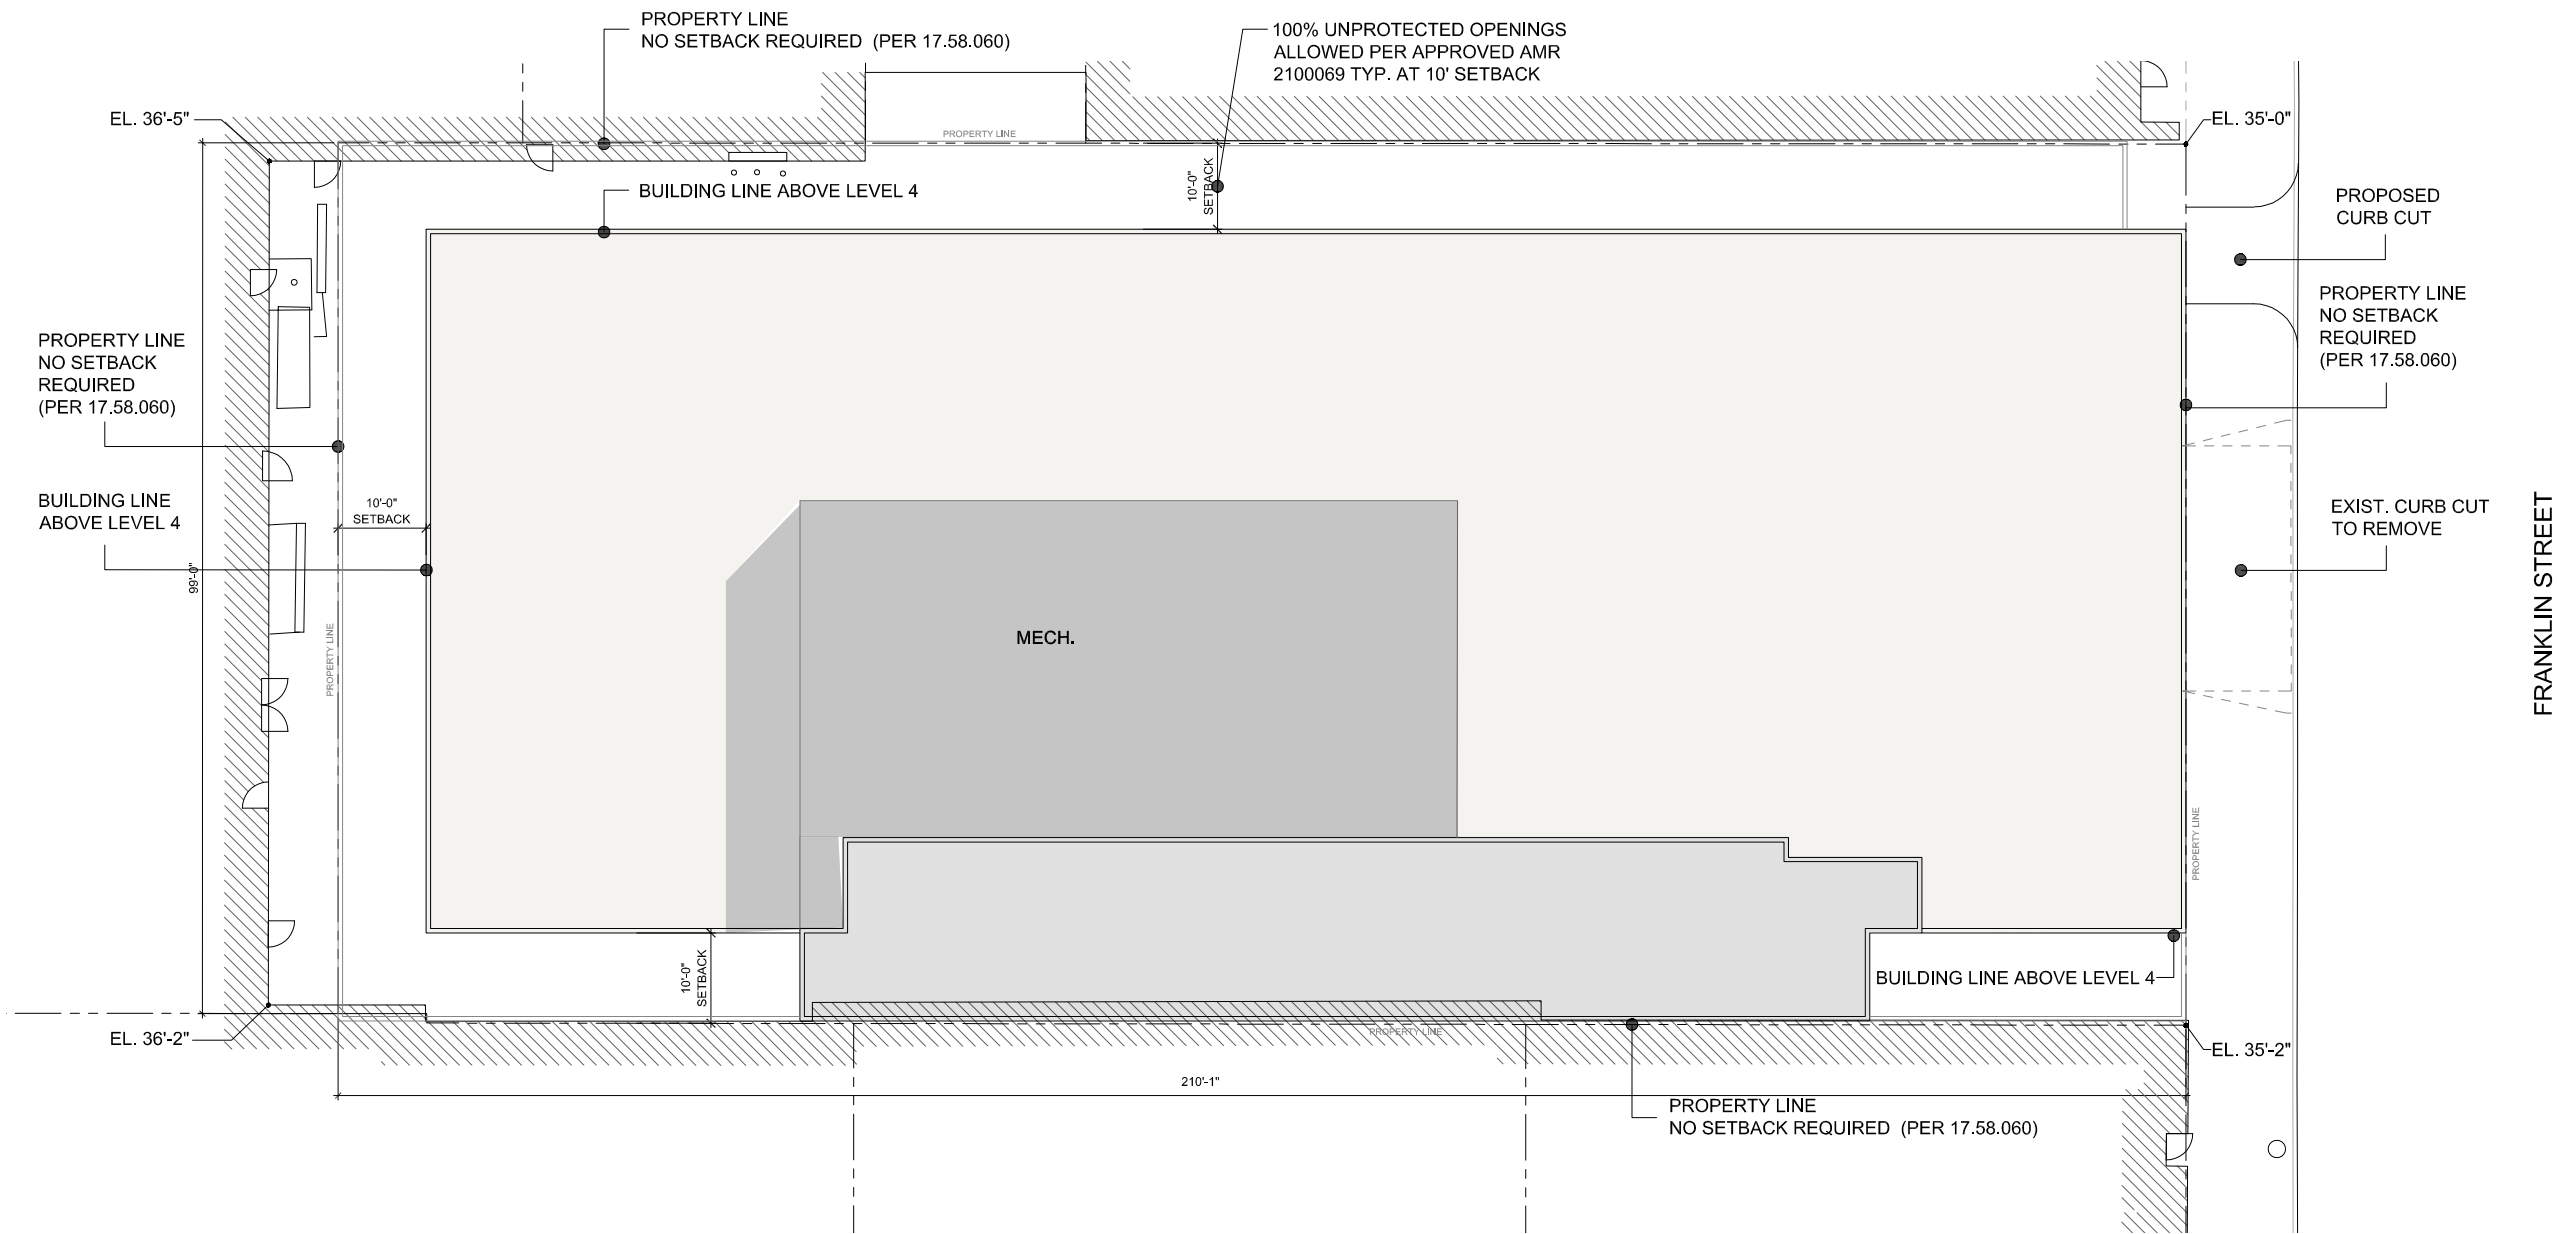


SITE PLAN


SCALE: x" = 1'-0" 0' 5' 15' 30'




SITE
CONTEXT AXONOMETRIC

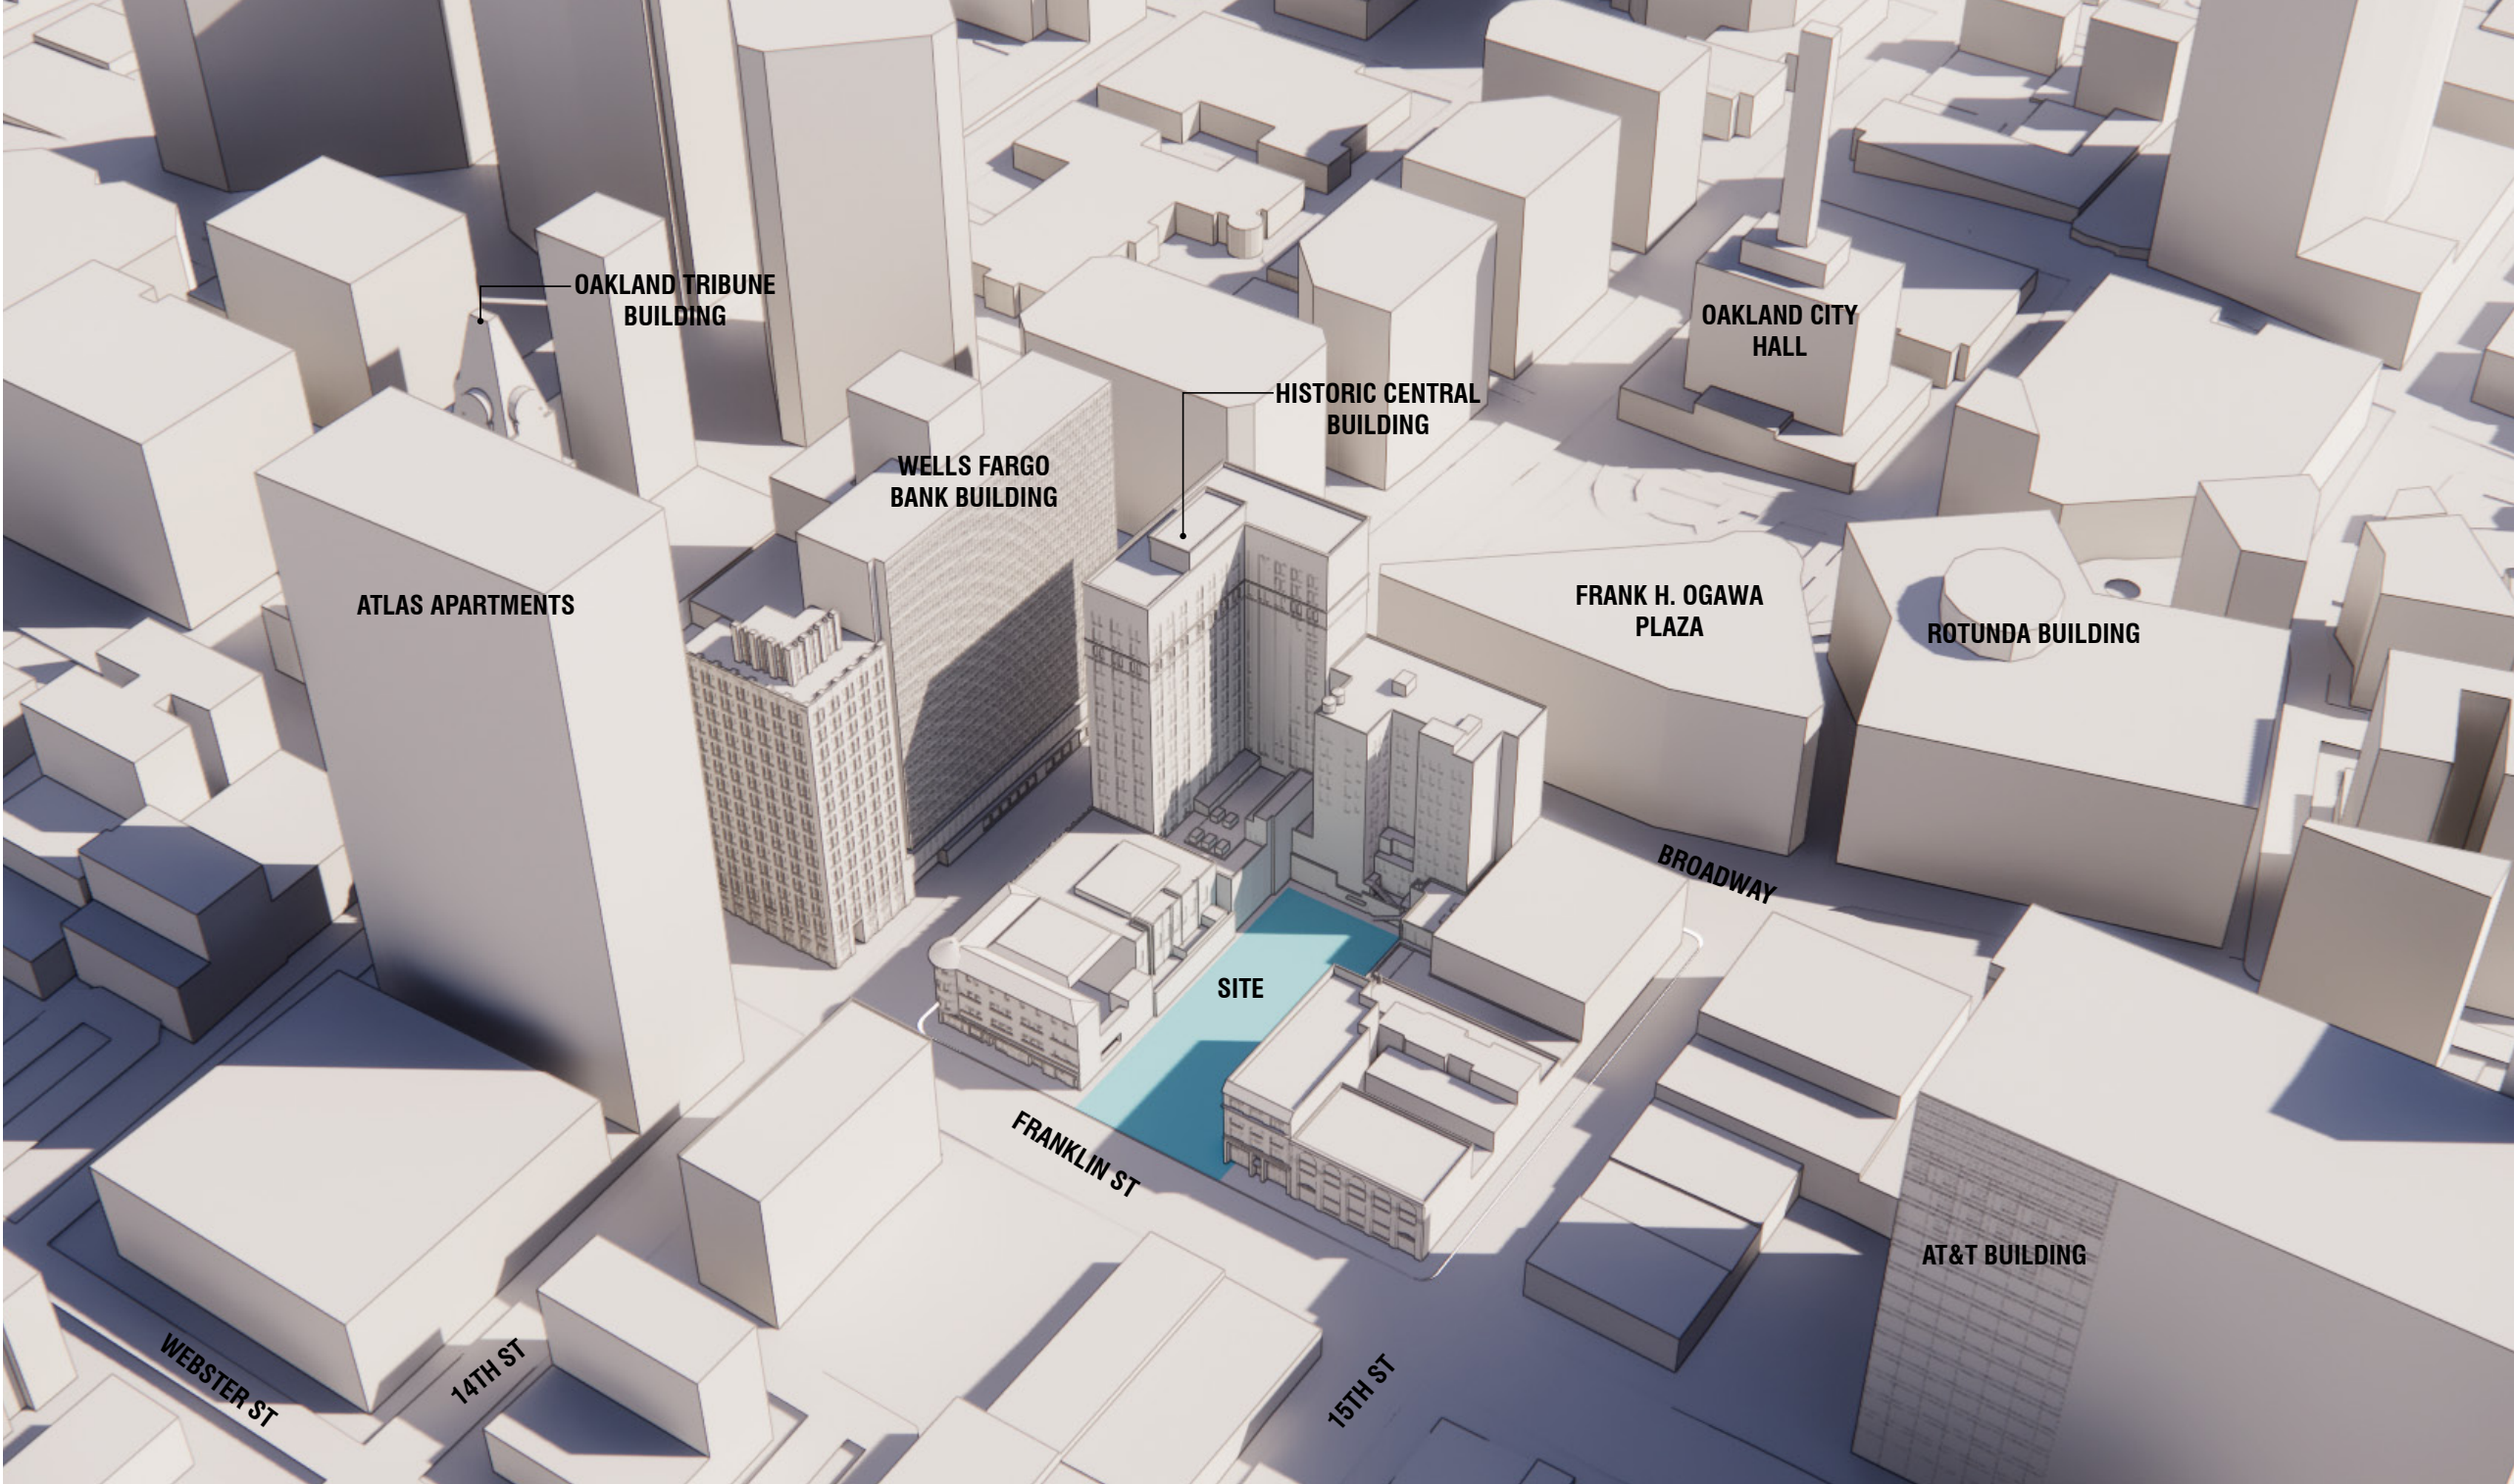

SITE
CONTEXT AXONOMETRIC

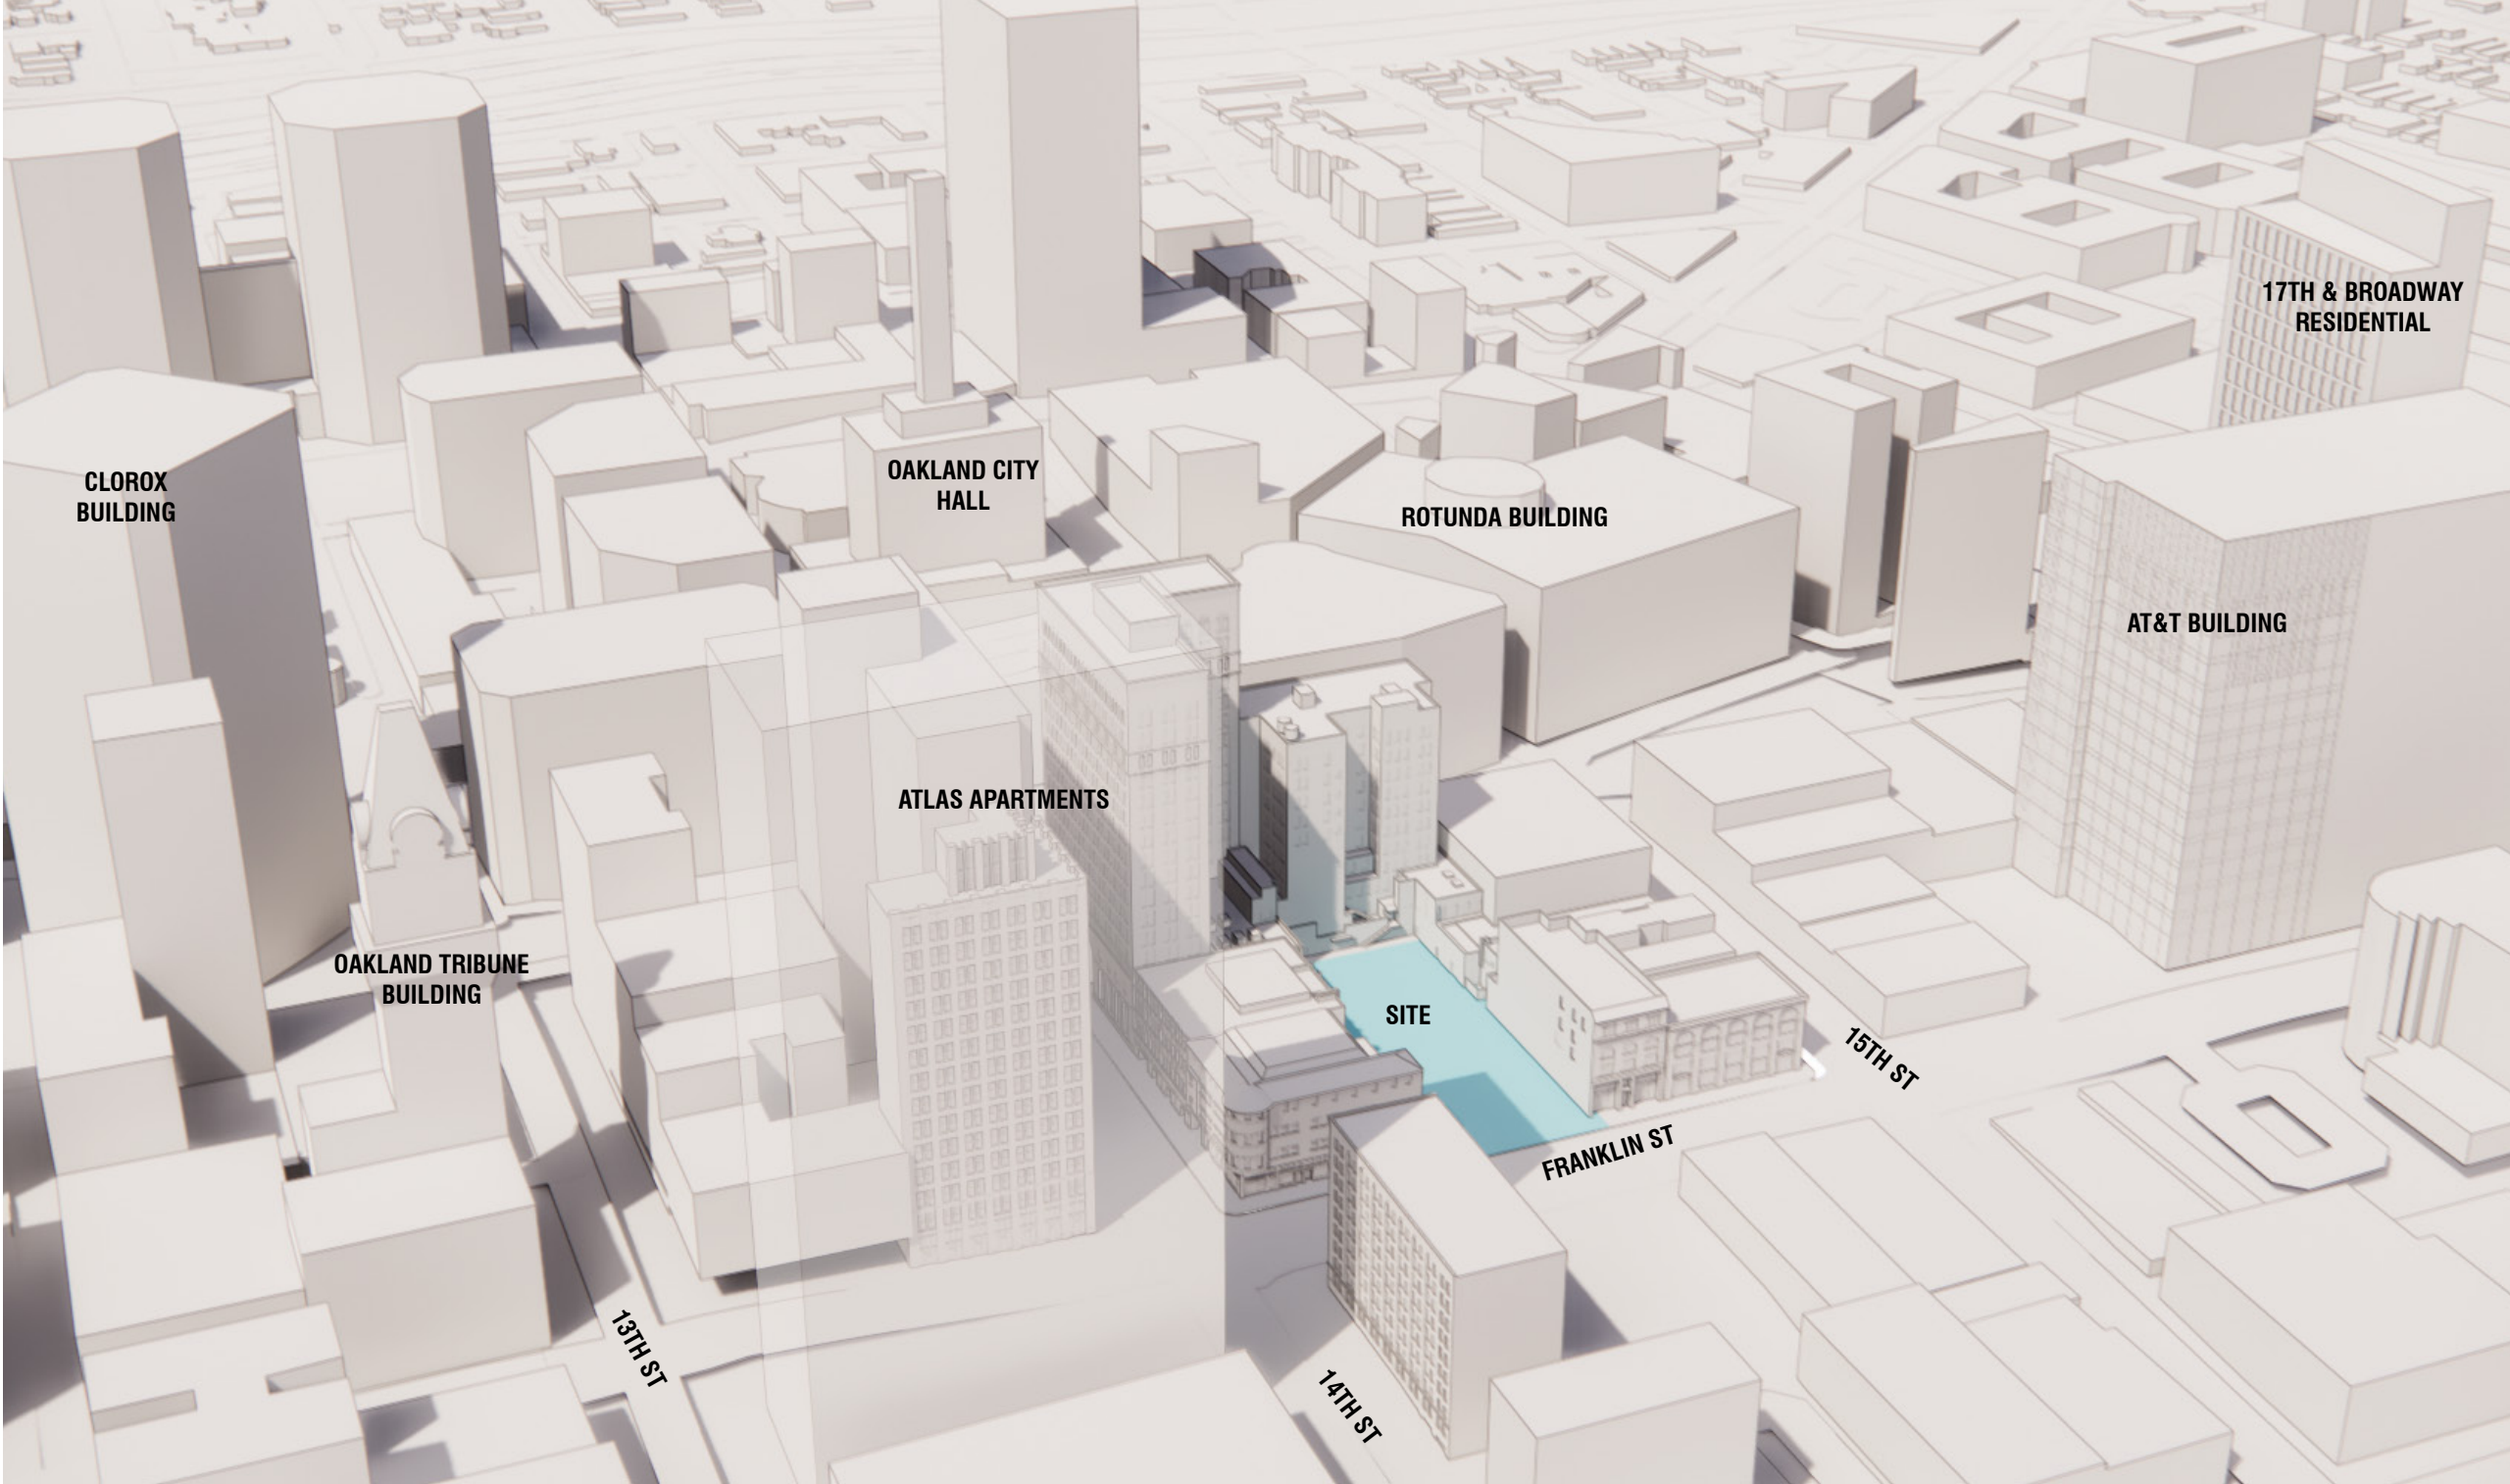

SITE
CONTEXT PHOTOS

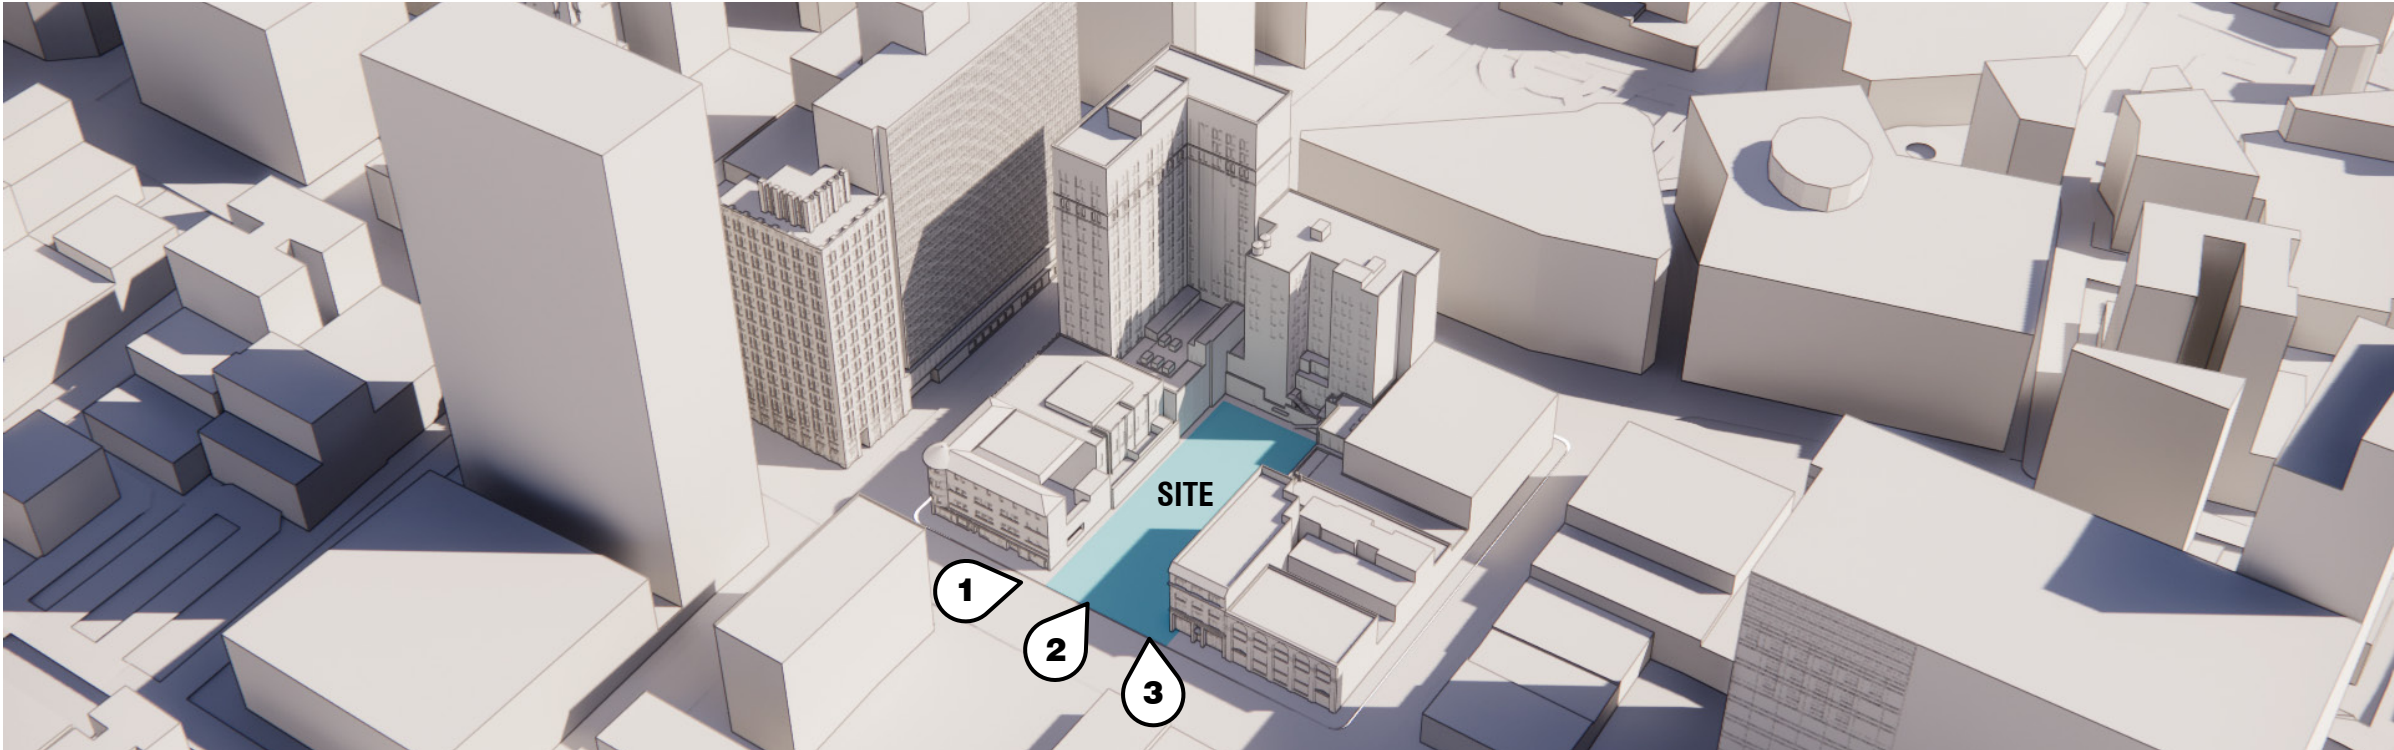

1. View to site from south




2. View to site from south-east



3. View towards site from east

SITE
CONTEXT PHOTOS

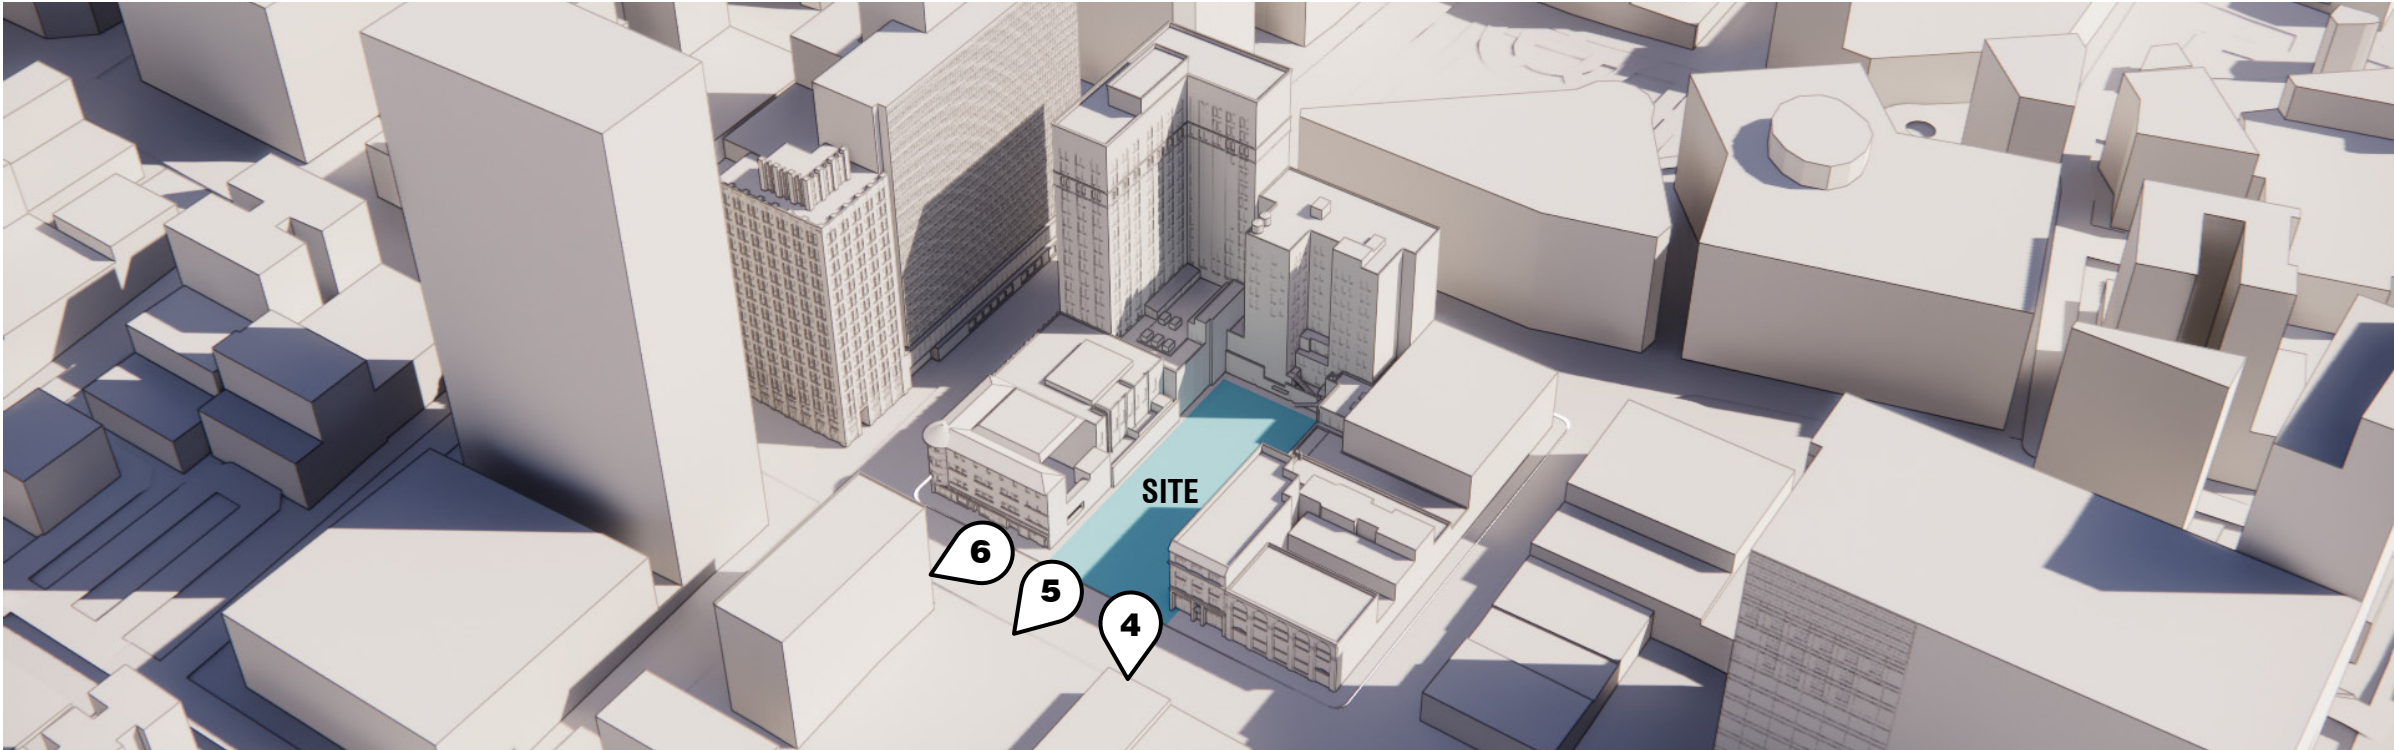

4. View from site to east




5. View from site to south-east



6. View from site to south

SITE
CONTEXT PHOTOS

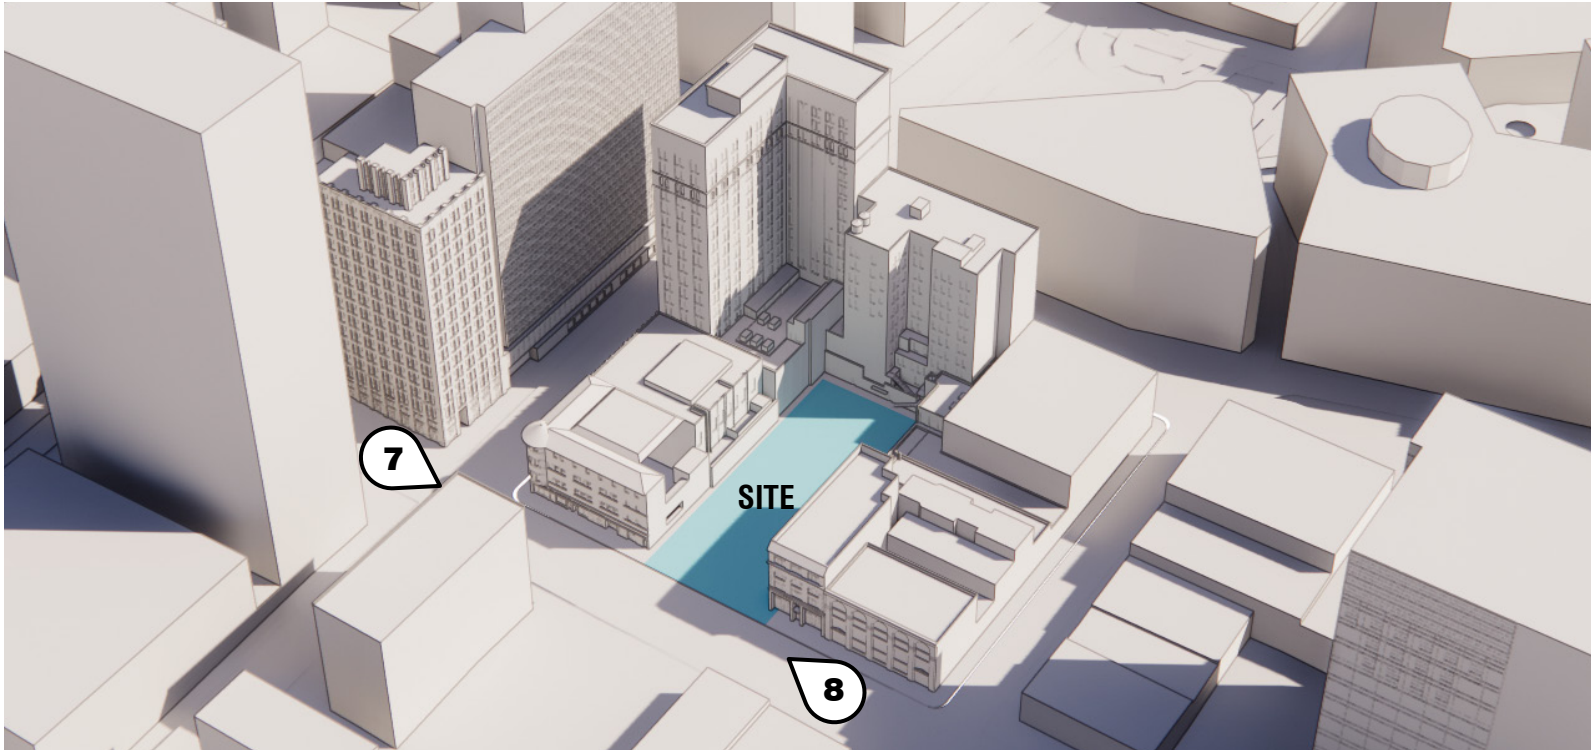


7. View along Franklin St. to north-east



8. View along Franklin St. to south-west

SITE
CONTEXT PHOTOS

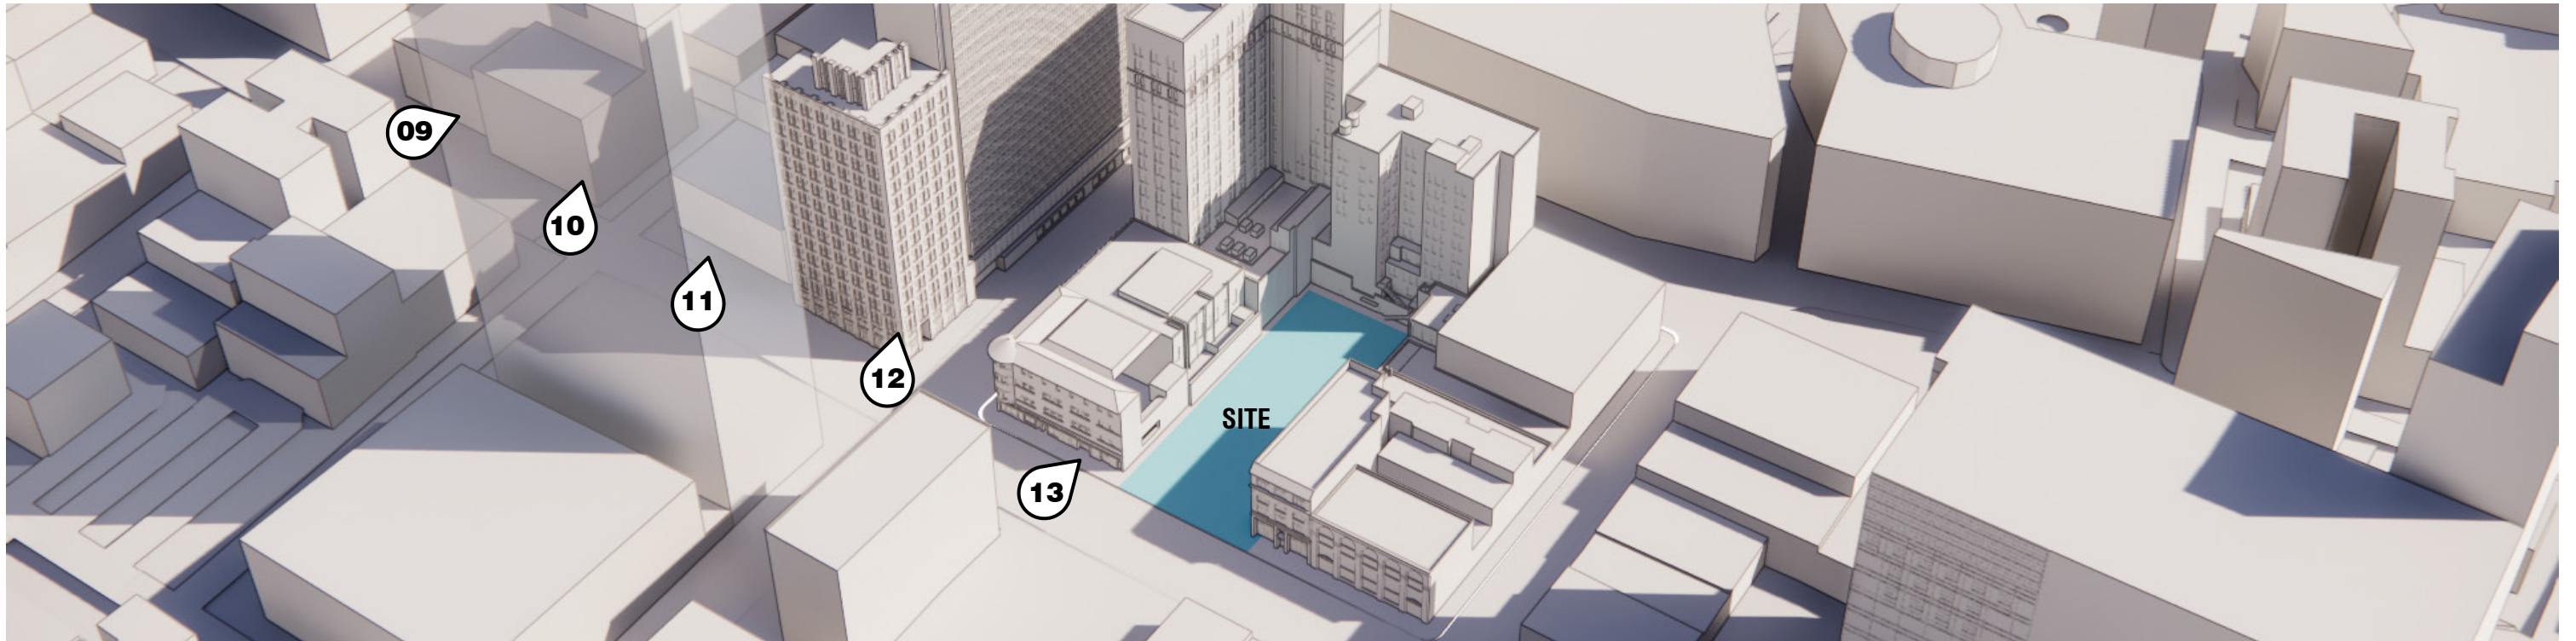

9. 1205 Franklin St.



10. Tribune Tower, 99 13TH St.



11. 1305 Franklin St.



12. 1901 Harrison St.



13. 1407 Franklin St.

SITE
CONTEXT PHOTOS




14. 1445 Franklin St.



15. 401 15TH St.



16. 1517 Franklin St.

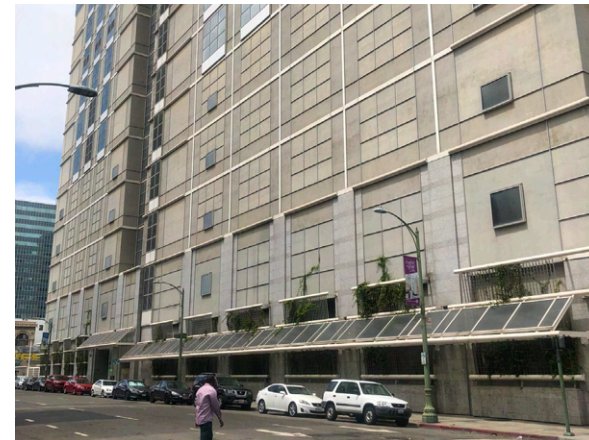


17. 1587 Franklin St.



18. 1701 Franklin St.

SITE
CONTEXT PHOTOS

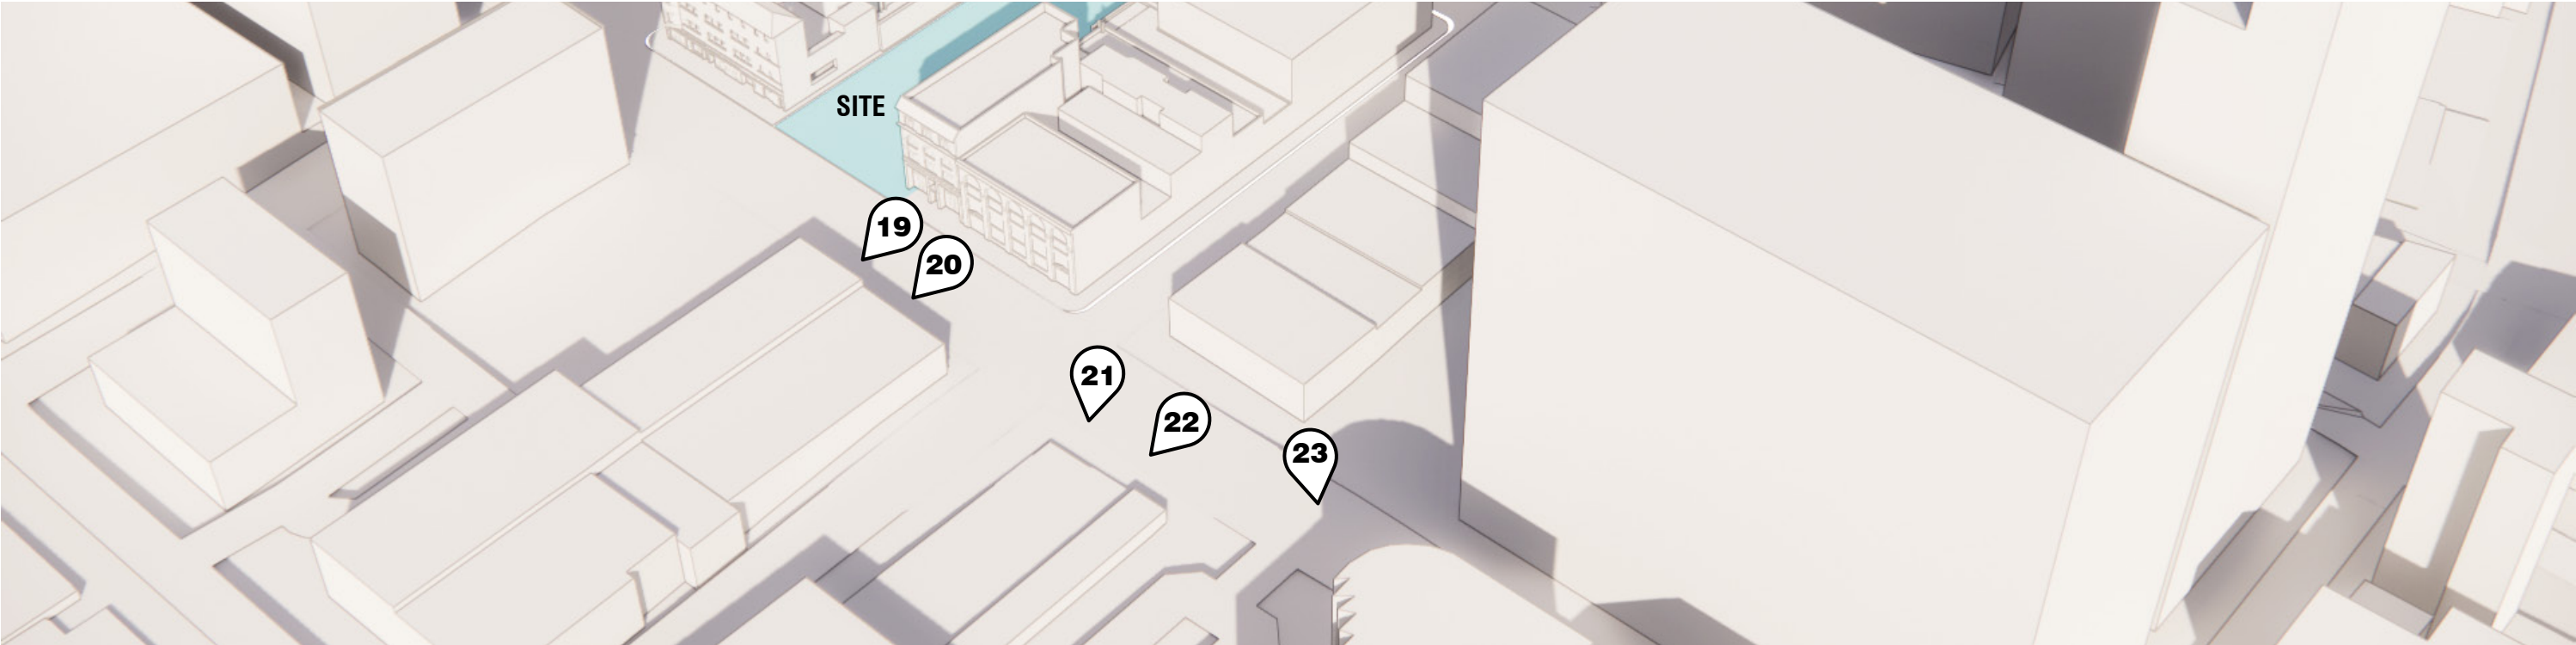

19. 1430 Franklin St.



20. 1444 Franklin St.



21. 1504 Franklin St.





22. 1510 Franklin St.



23. 1582 Franklin St.

SITE
CONTEXT PHOTOS

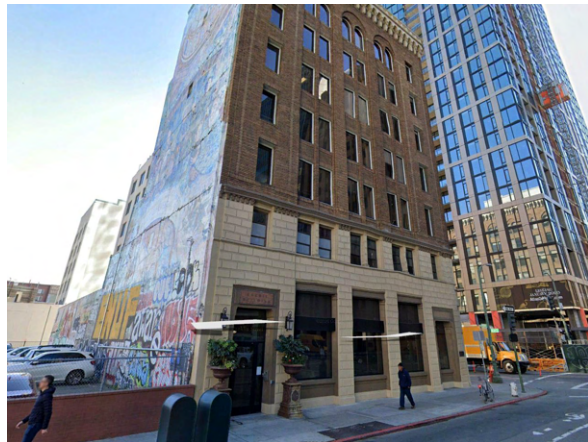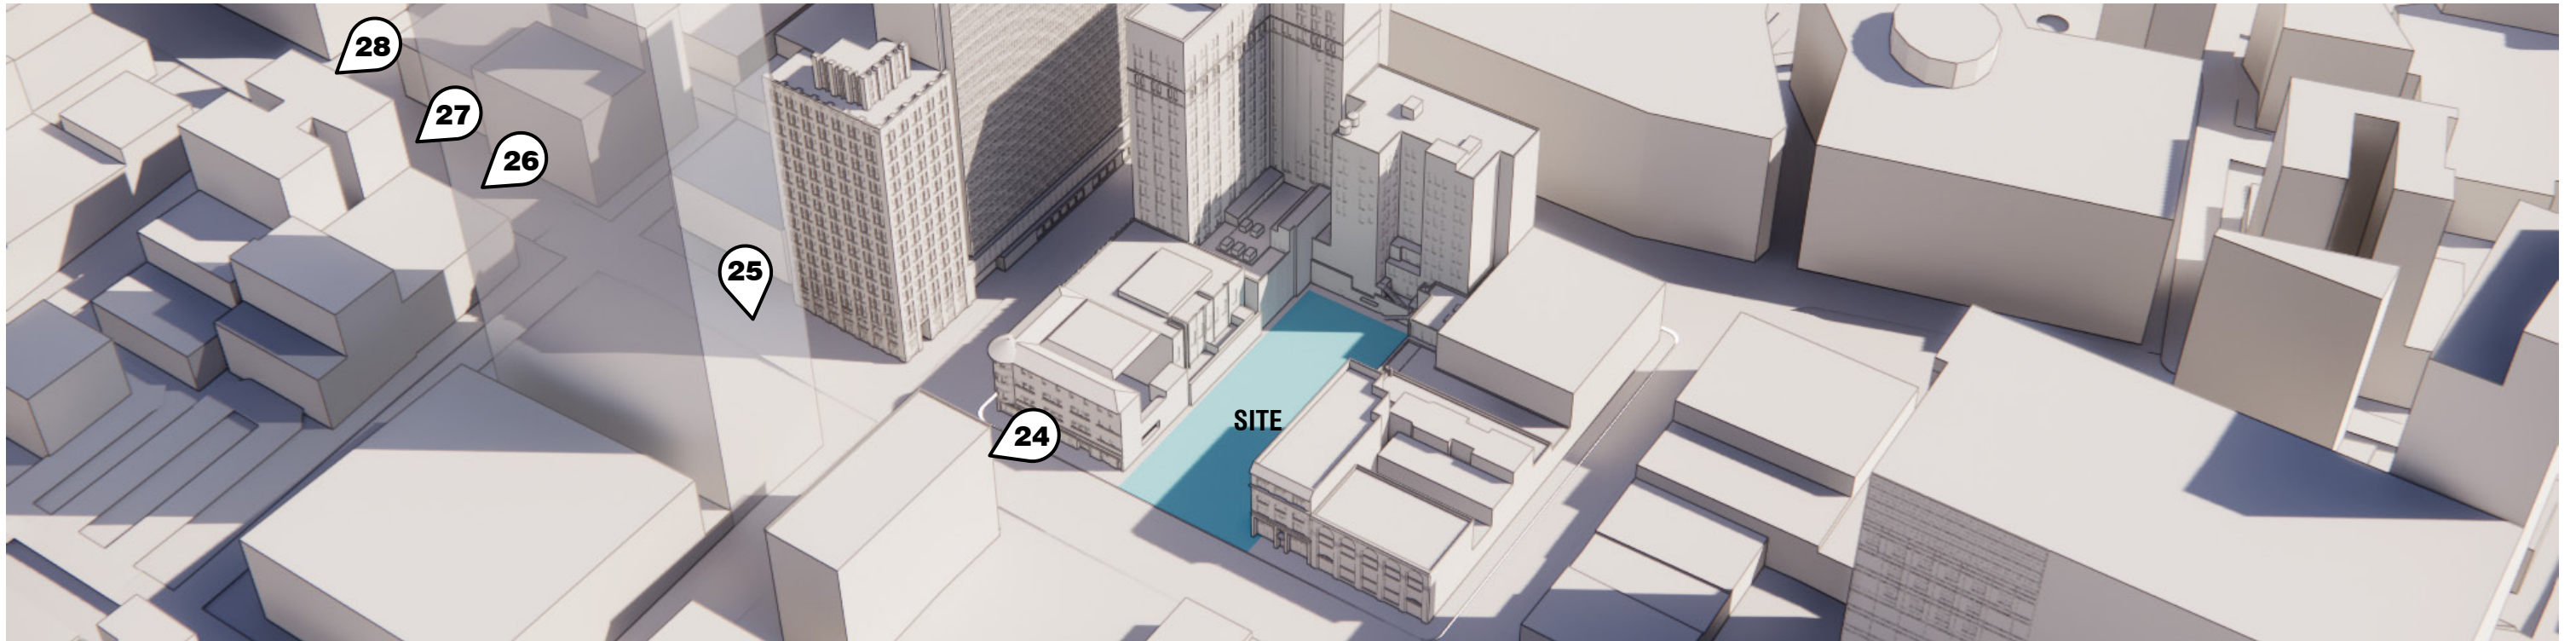

24. 1400 Franklin St.



25. 385 14TH St.



26. 393 13TH St.



27. 394 12TH St.



28. 1168 Franklin St.

OFFICE TOWER PROGRAM

**OFFICE TOWER PROGRAM
PROGRAM DIAGRAM**


MECHANICAL

AMENITY


Indoor and outdoor amenities mid tower and on roof



OFFICE
21 floors of office

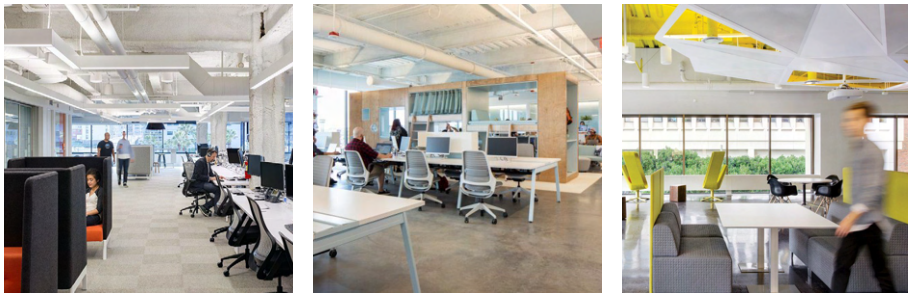


PARKING GARAGE
100 stalls over 3 floors

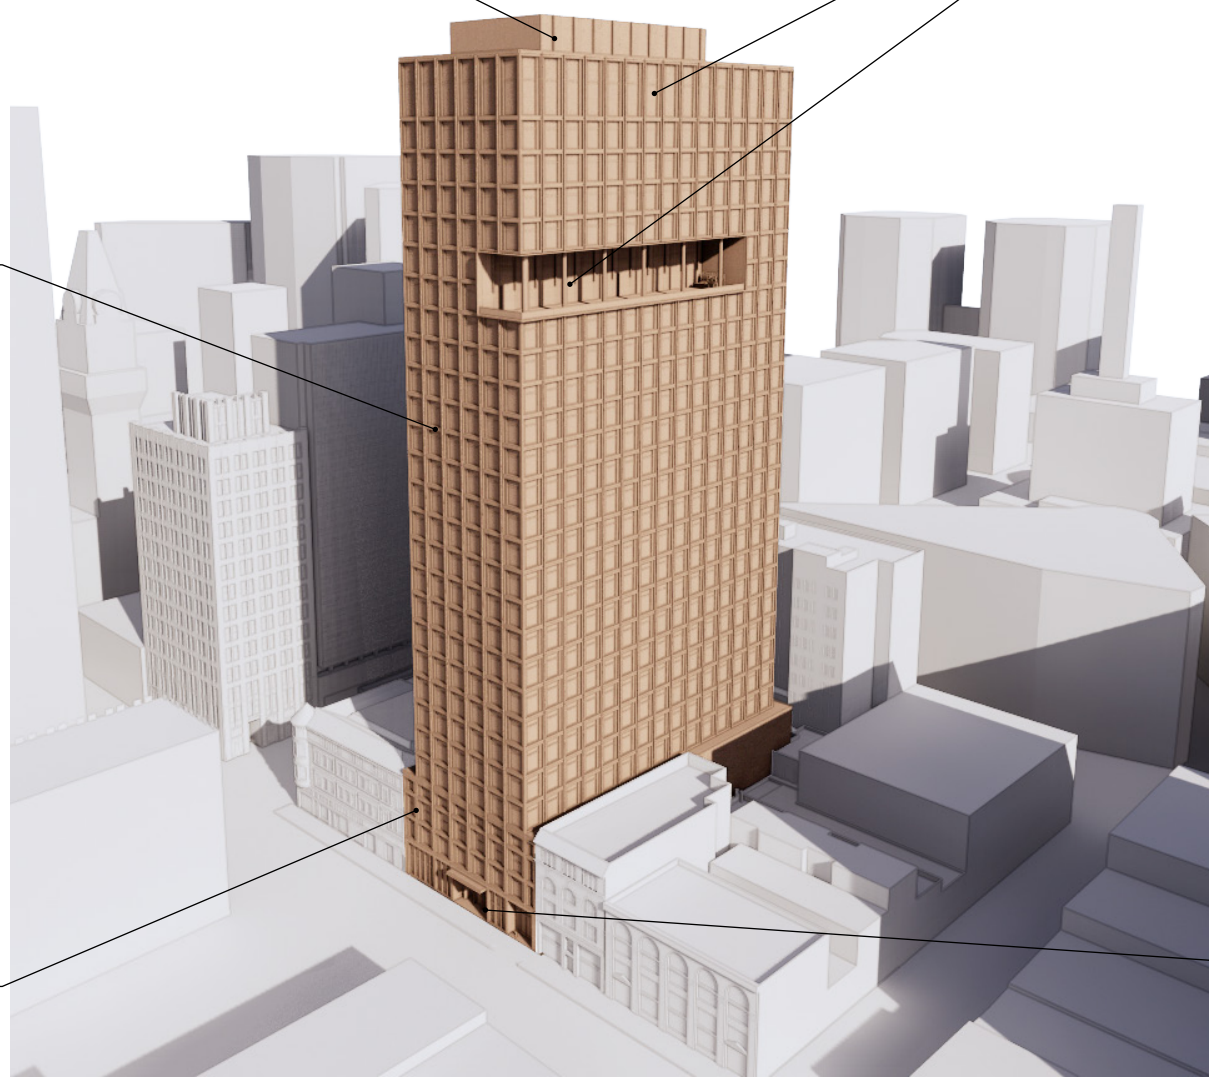


LOBBY

Office lobby and back of house

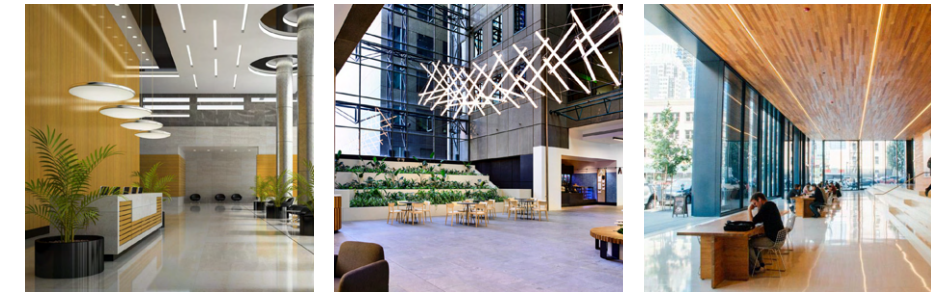

DESIGN PART I

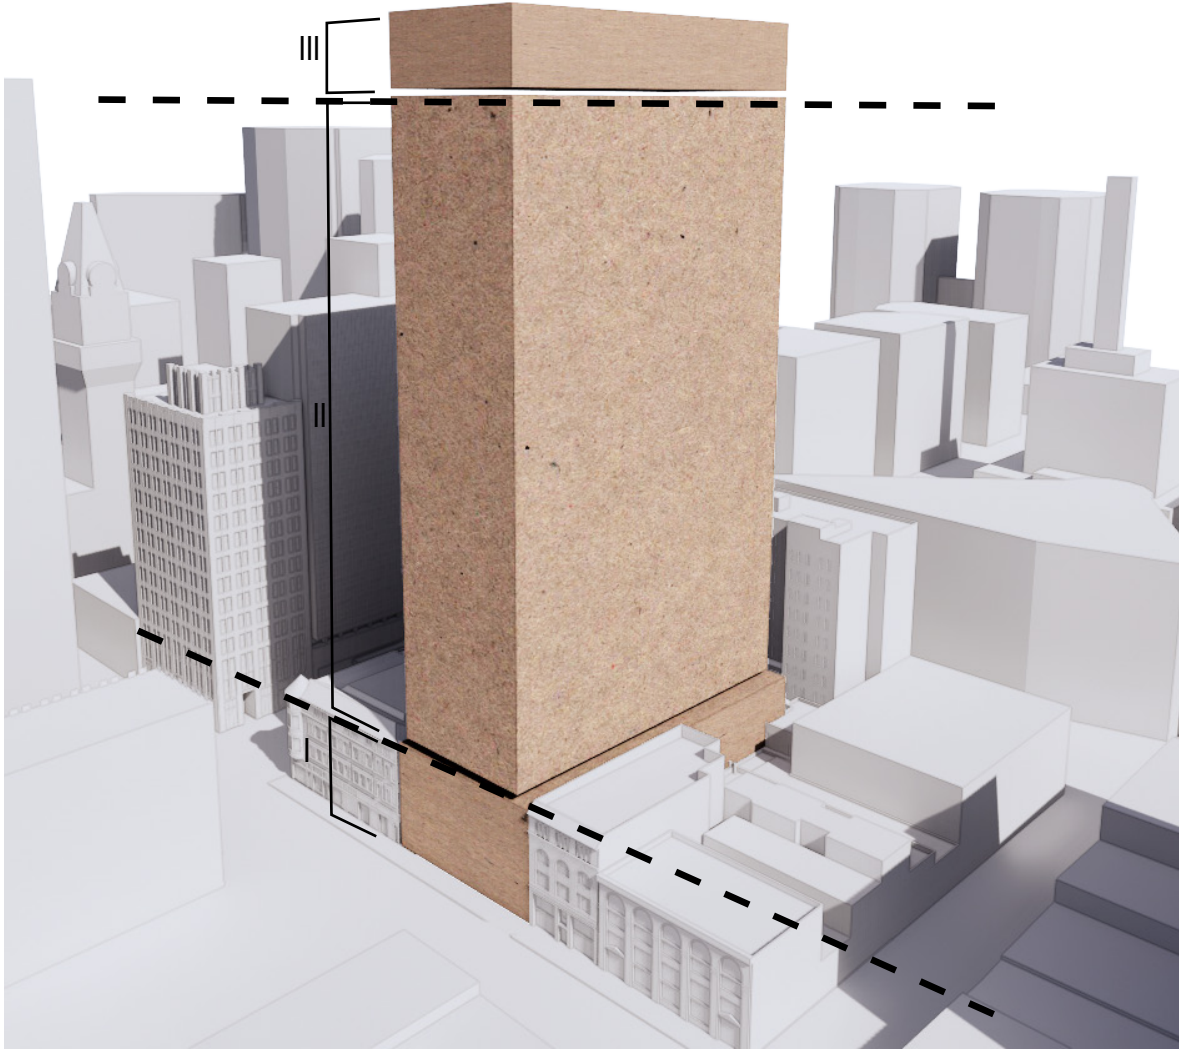




BUILDINGS AROUND THE SITE BROKEN UP INTO THREE PARTS



MODERN EXAMPLE



DESIGN PART I
FACADE HISTORICAL REFERENCE

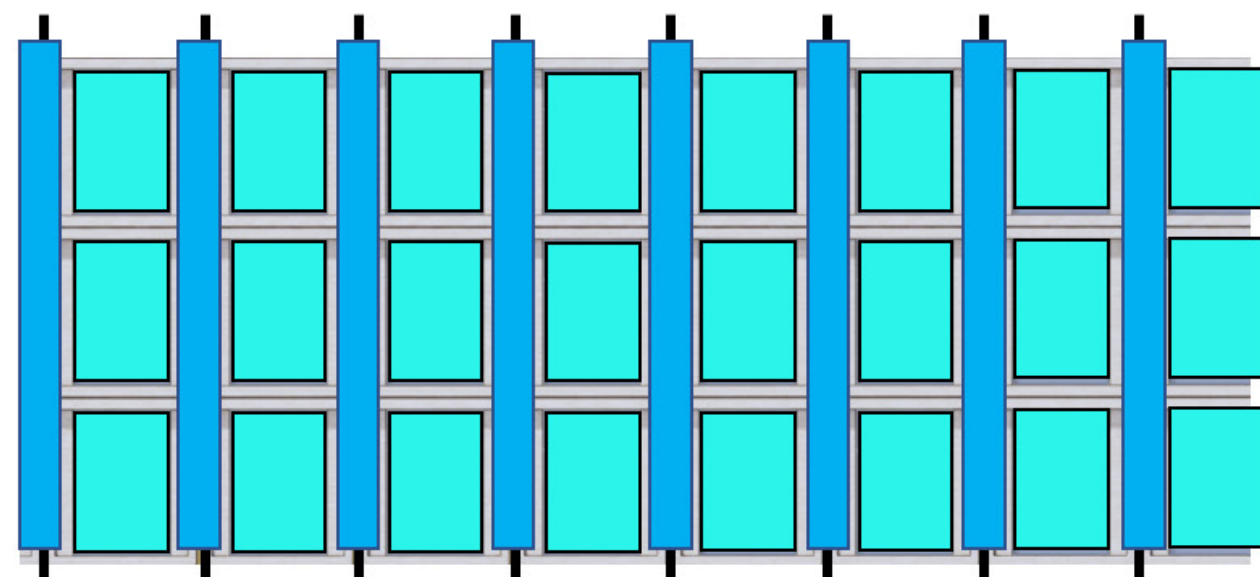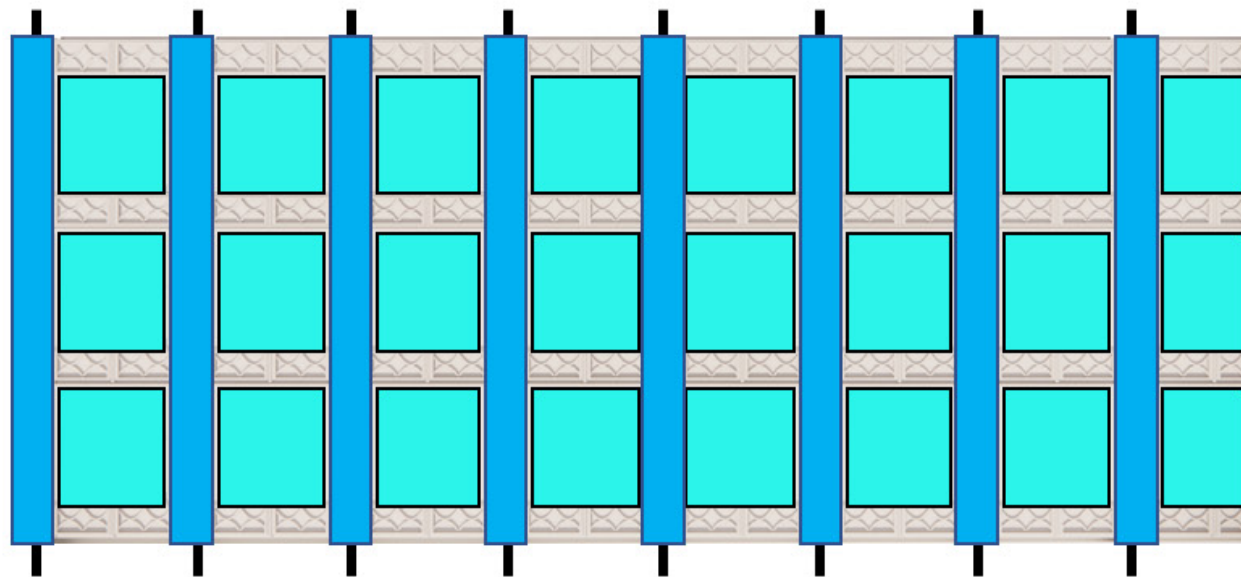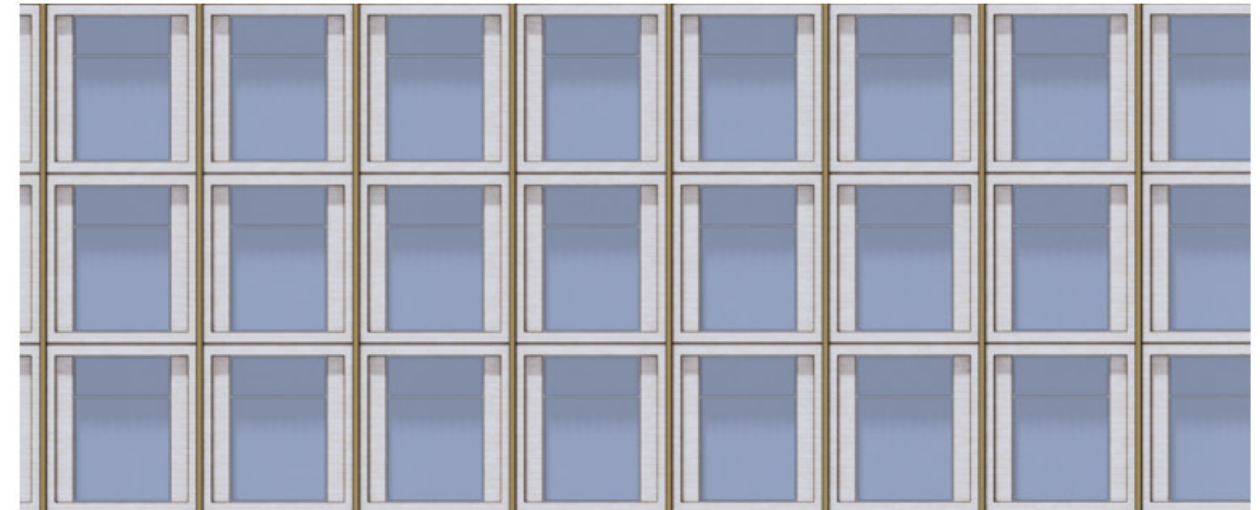

CATHEDRAL BUILDING: 1615 Broadway

Cathedral Building verticality and rhythm.

FRANKLIN OFFICE PROPOSAL: 1431 Franklin St.


Proposed building verticality and rhythm. Windows were elongated to further to reinforce historic allusions.

DESIGN PART I
FACADE HISTORICAL REFERENCE




Great care was taken in aligning openings and window sashes with adjacent buildings to maintain the continuity of the streetscape.

DESIGN PART I
BUILDING MATERIALS

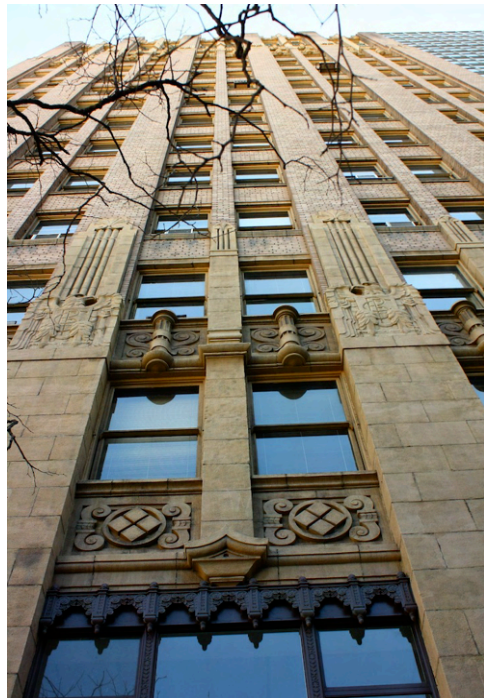

Variegated brick color to match Financial Center Building in the historic district.

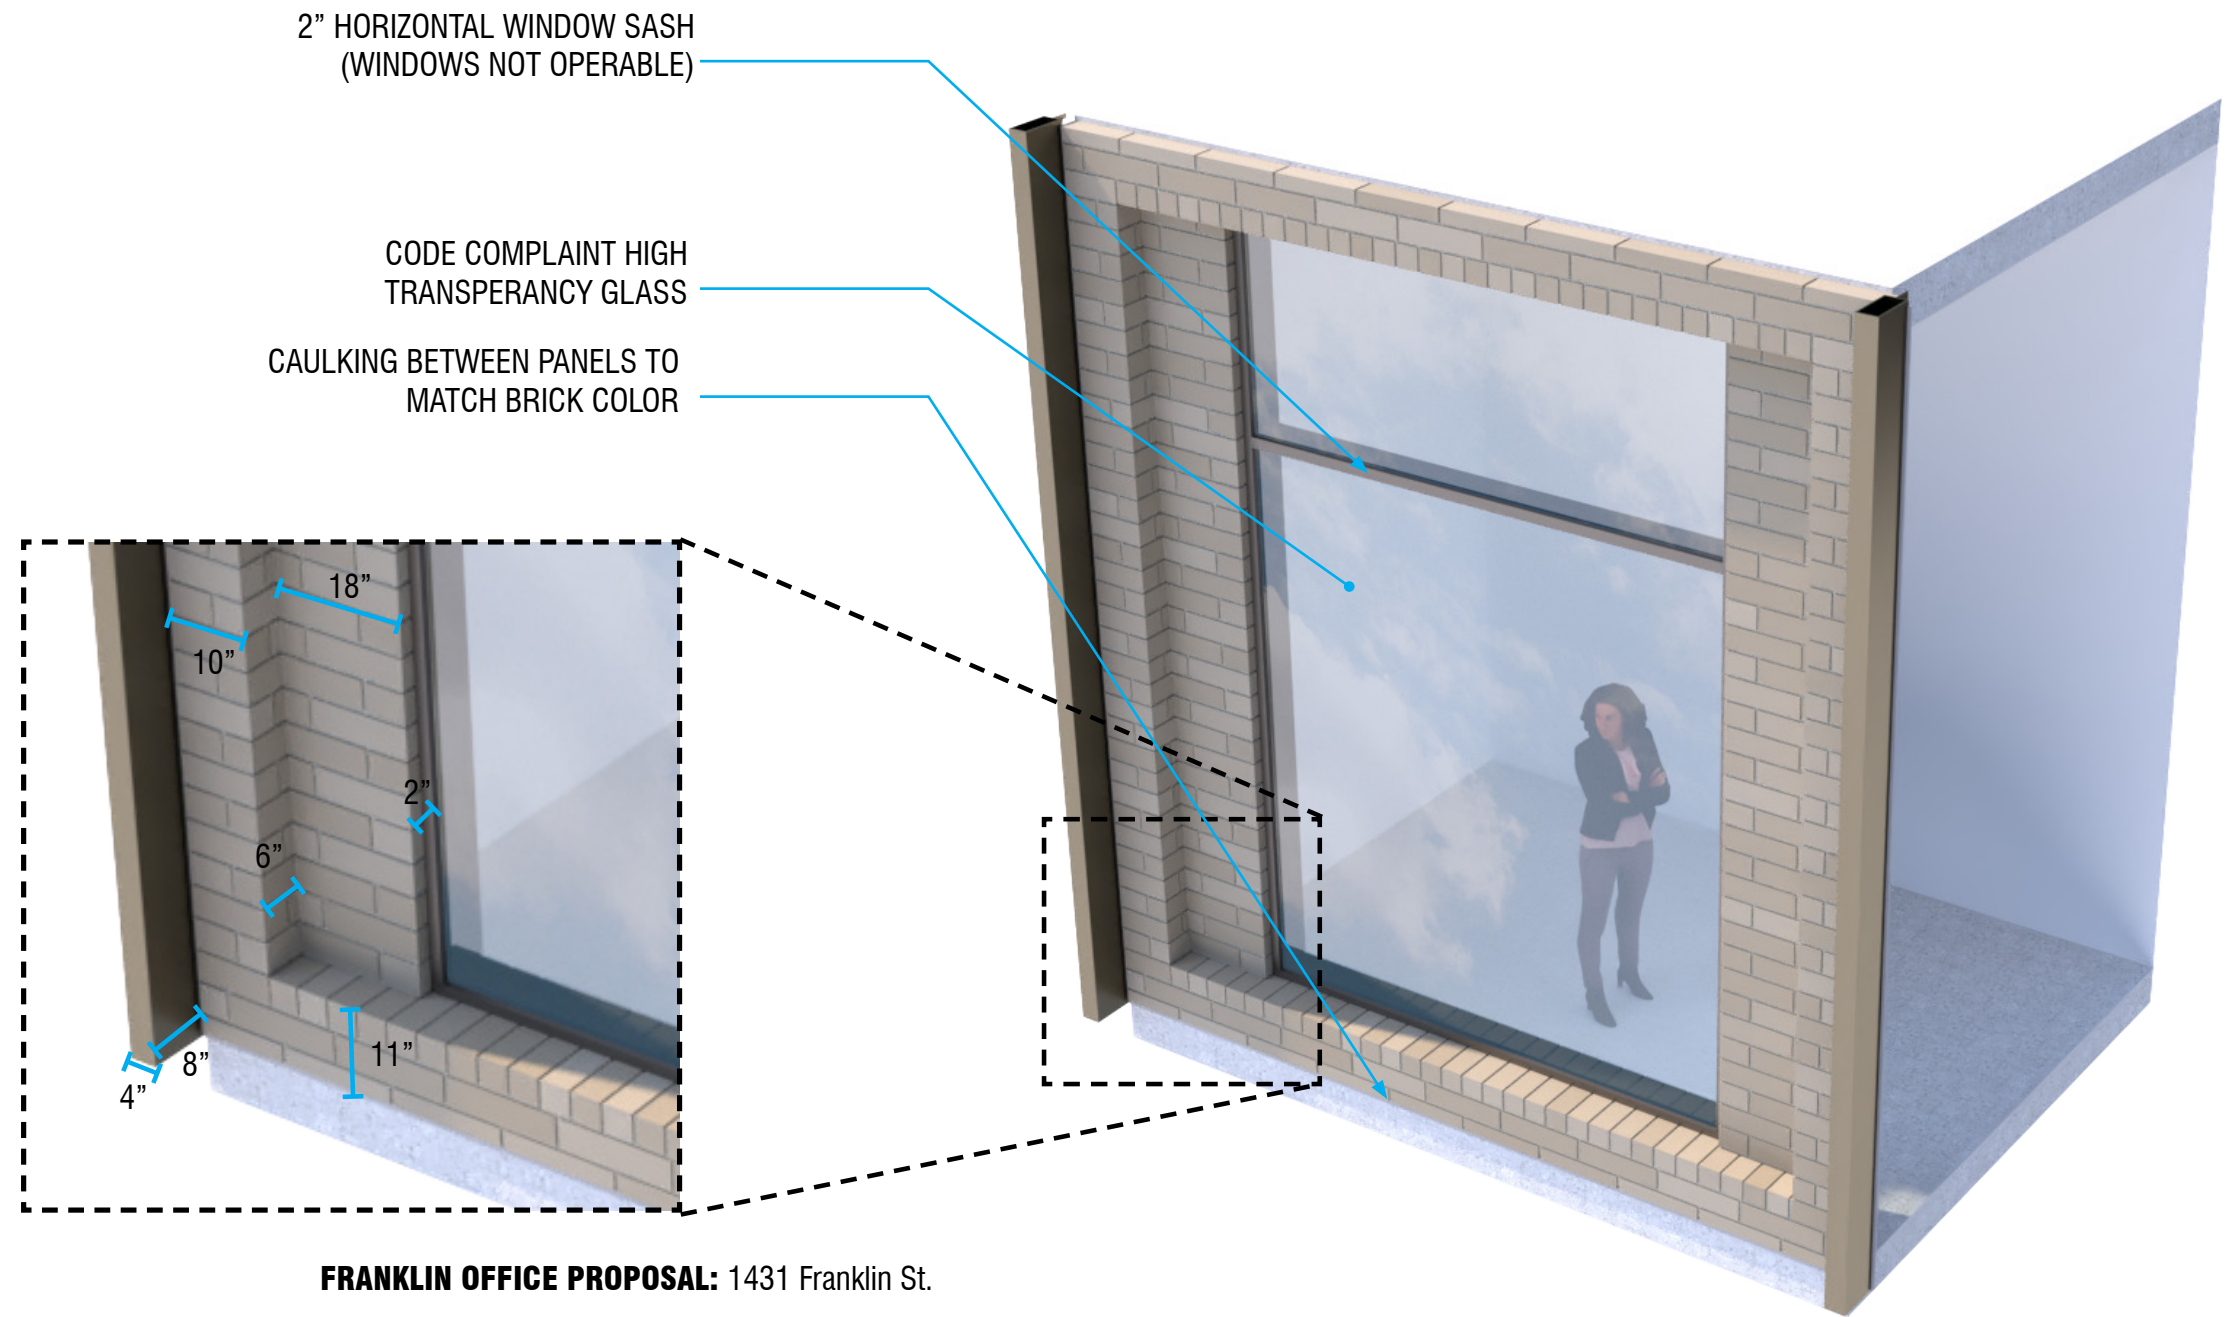

FRANKLIN OFFICE PROPOSAL: 1431 Franklin St.

Punched window precast system with variegated brick finish and aluminum anodized windows. Color to match Financial Center Building.

*ALL MEASUREMENTS ARE APPROXIMATE AND SUBJECT TO ENGINEERING AND CONSTRUCTION REFINEMENT

TOWER DESIGN ELEMENTS



TOWER DESIGN
VIEW FROM FRANKLIN STREET



TOWER DESIGN
SECTION THROUGH LOBBY AND GARAGE







TOWER DESIGN
LOBBY ENTRY

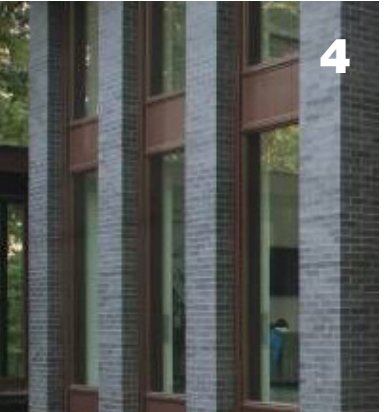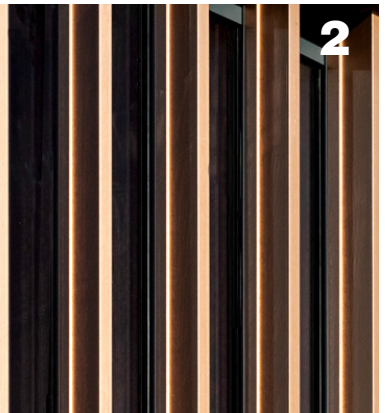



- 1. BEIGE BRICK VENEER ON PRECAST PANEL
- 2. BRONZE METAL FINIS
- 3. ANODIZED ALUMINUM METAL SOFFIT
- 4. METAL FRAMED WINDOWS WITH BRICK PILASTER
- 5. CODE COMPLAINT HIGH TRANSPARENCY GLASS

TOWER DESIGN
LOBBY DETAILS

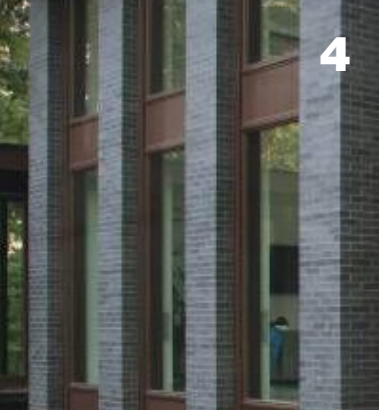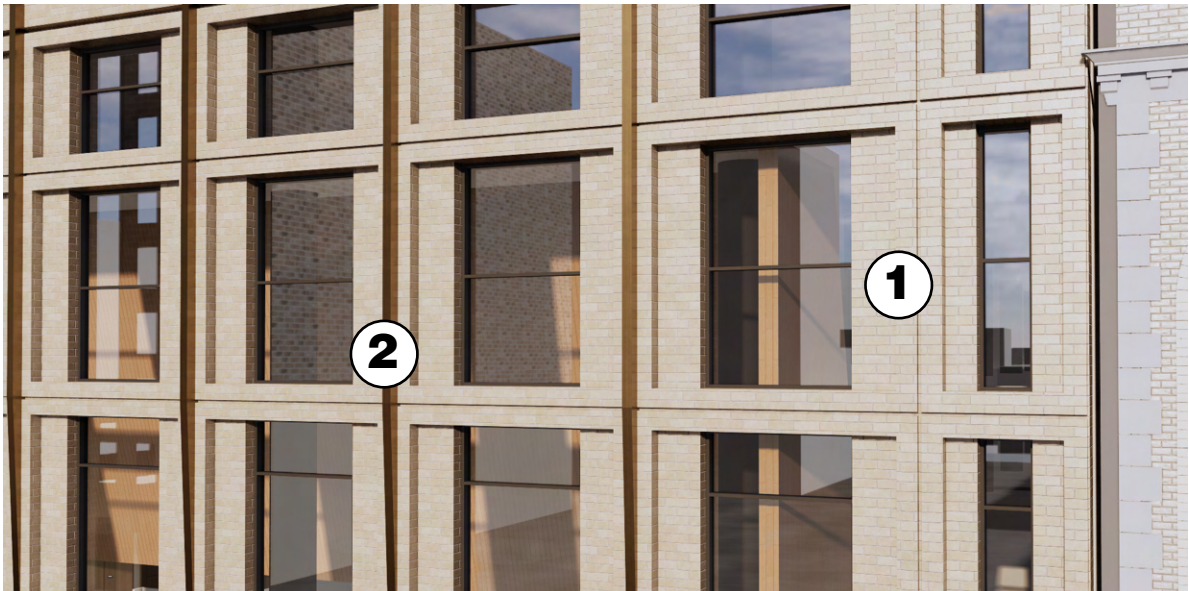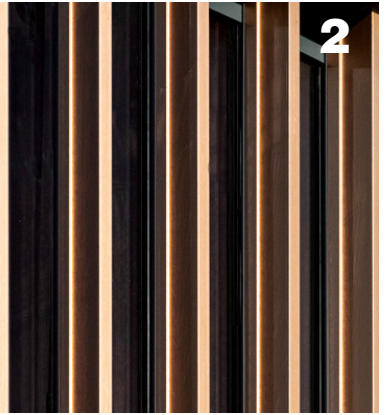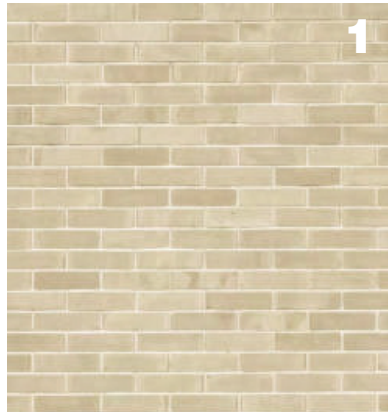


- 1. BEIGE BRICK VENEER ON PRECAST PANEL
- 2. BRONZE METAL FINIS
- 3. ANODIZED ALUMINUM METAL SOFFIT
- 4. METAL FRAMED WINDOWS WITH BRICK PILASTER
- 5. CODE COMPLAINT HIGH TRANSPERANCY GLASS

TOWER DESIGN
UPPER AMENITY LEVEL

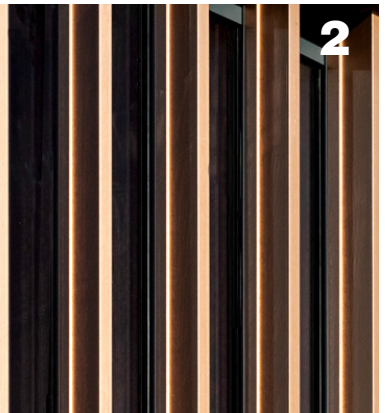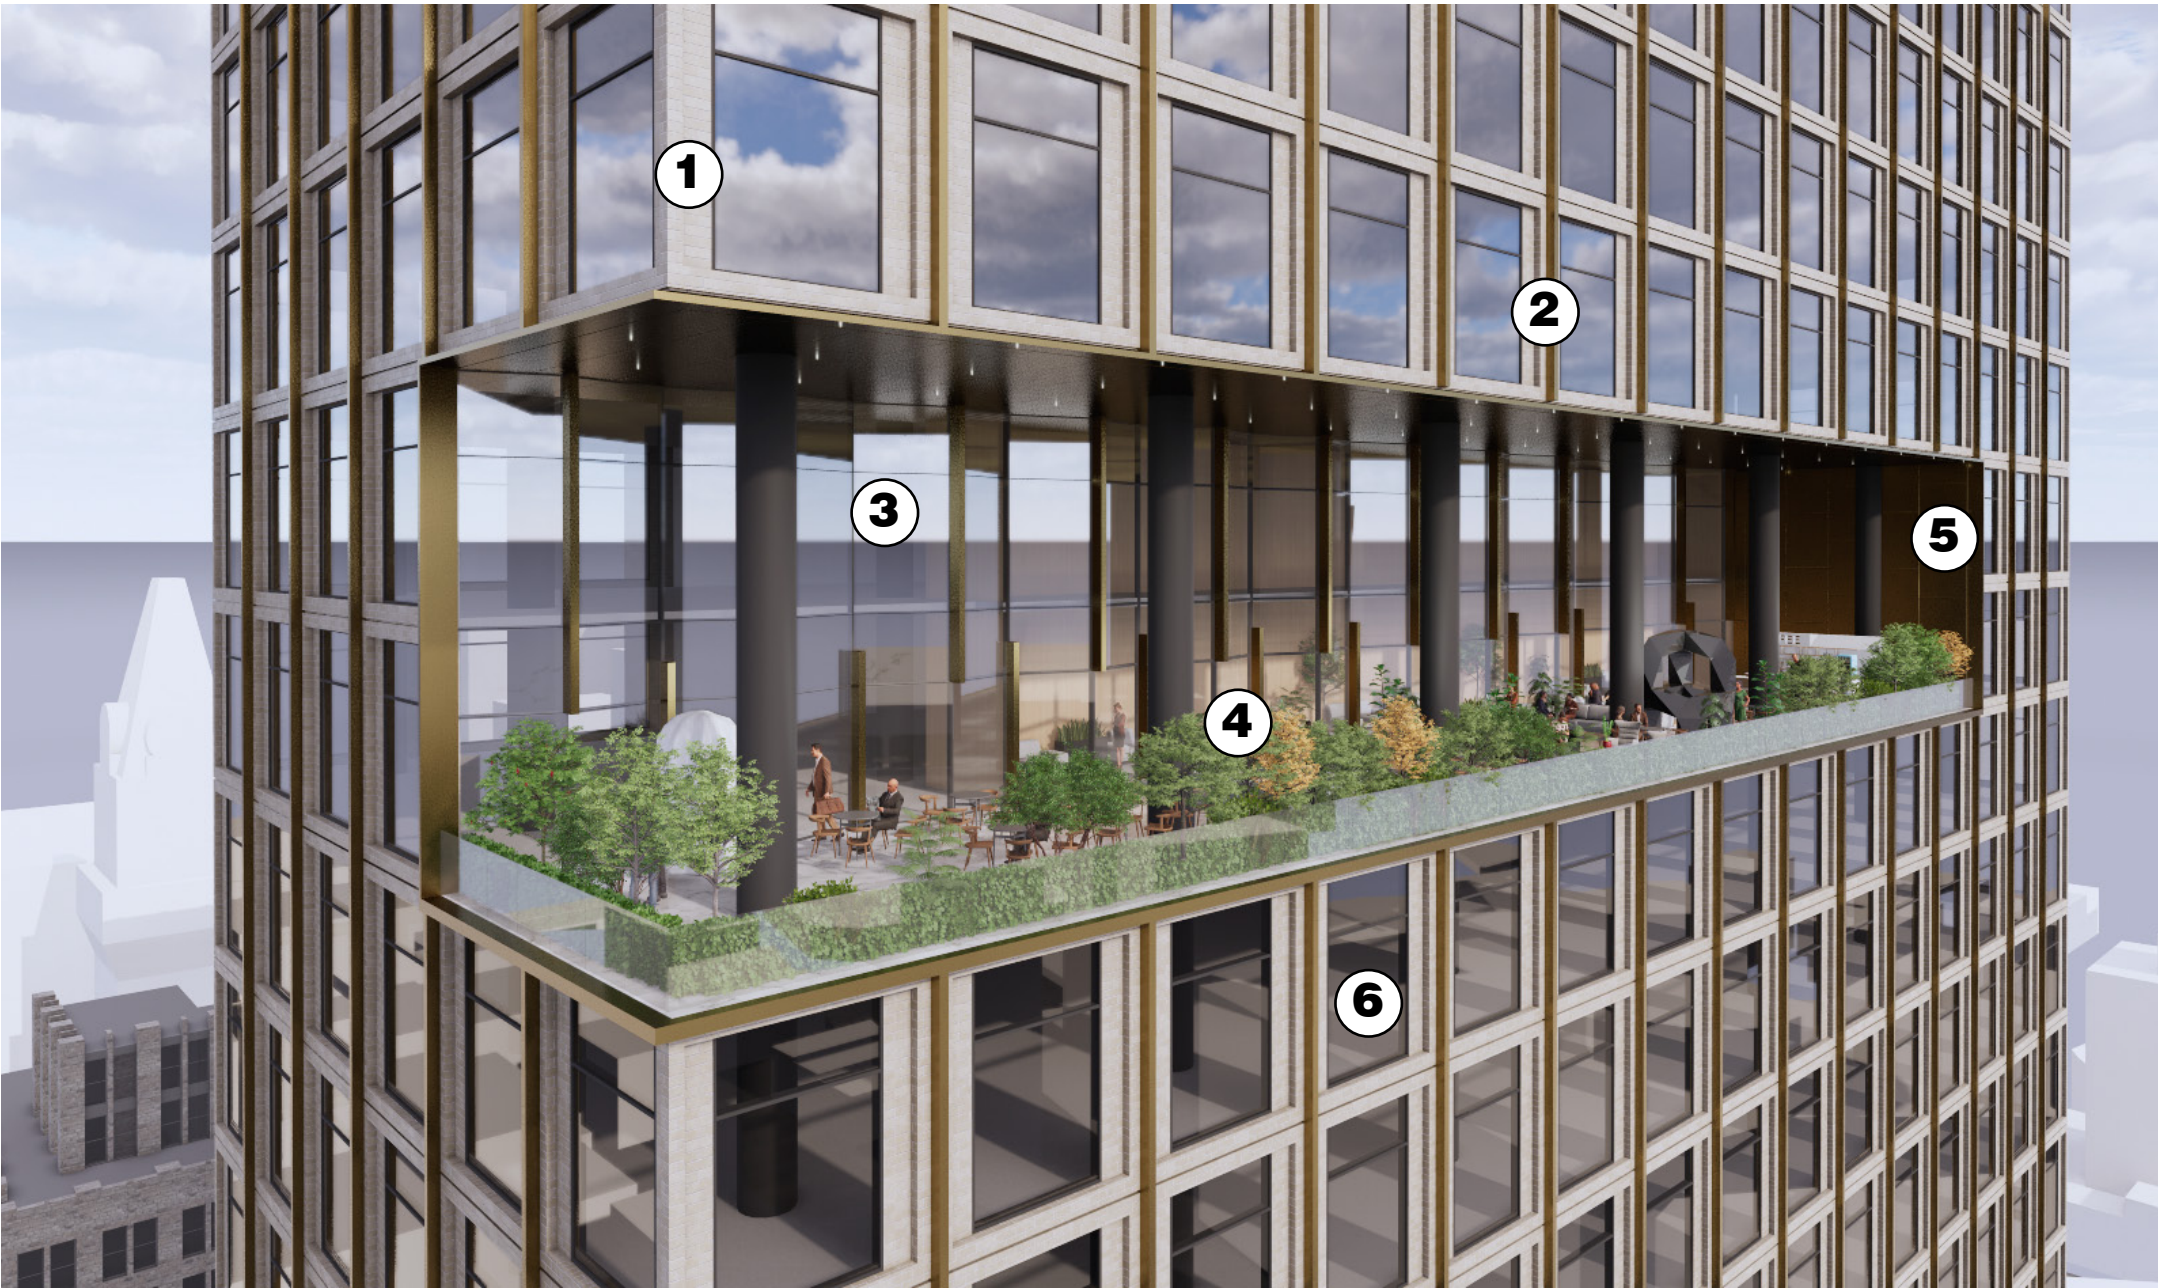



- 1. BEIGE BRICK VENEER ON PRECAST PANEL
- 2. BRONZE METAL FINIS
- 3. PLEATED GLASS WALL
- 4. OUTDOOR AMENITY SPACE
- 5. MATCHING BRONZE COLOR PANELS
- 6. CODE COMPLAINT HIGH TRANSPERANCY GLASS

TOWER DESIGN
FACADE DETAILS

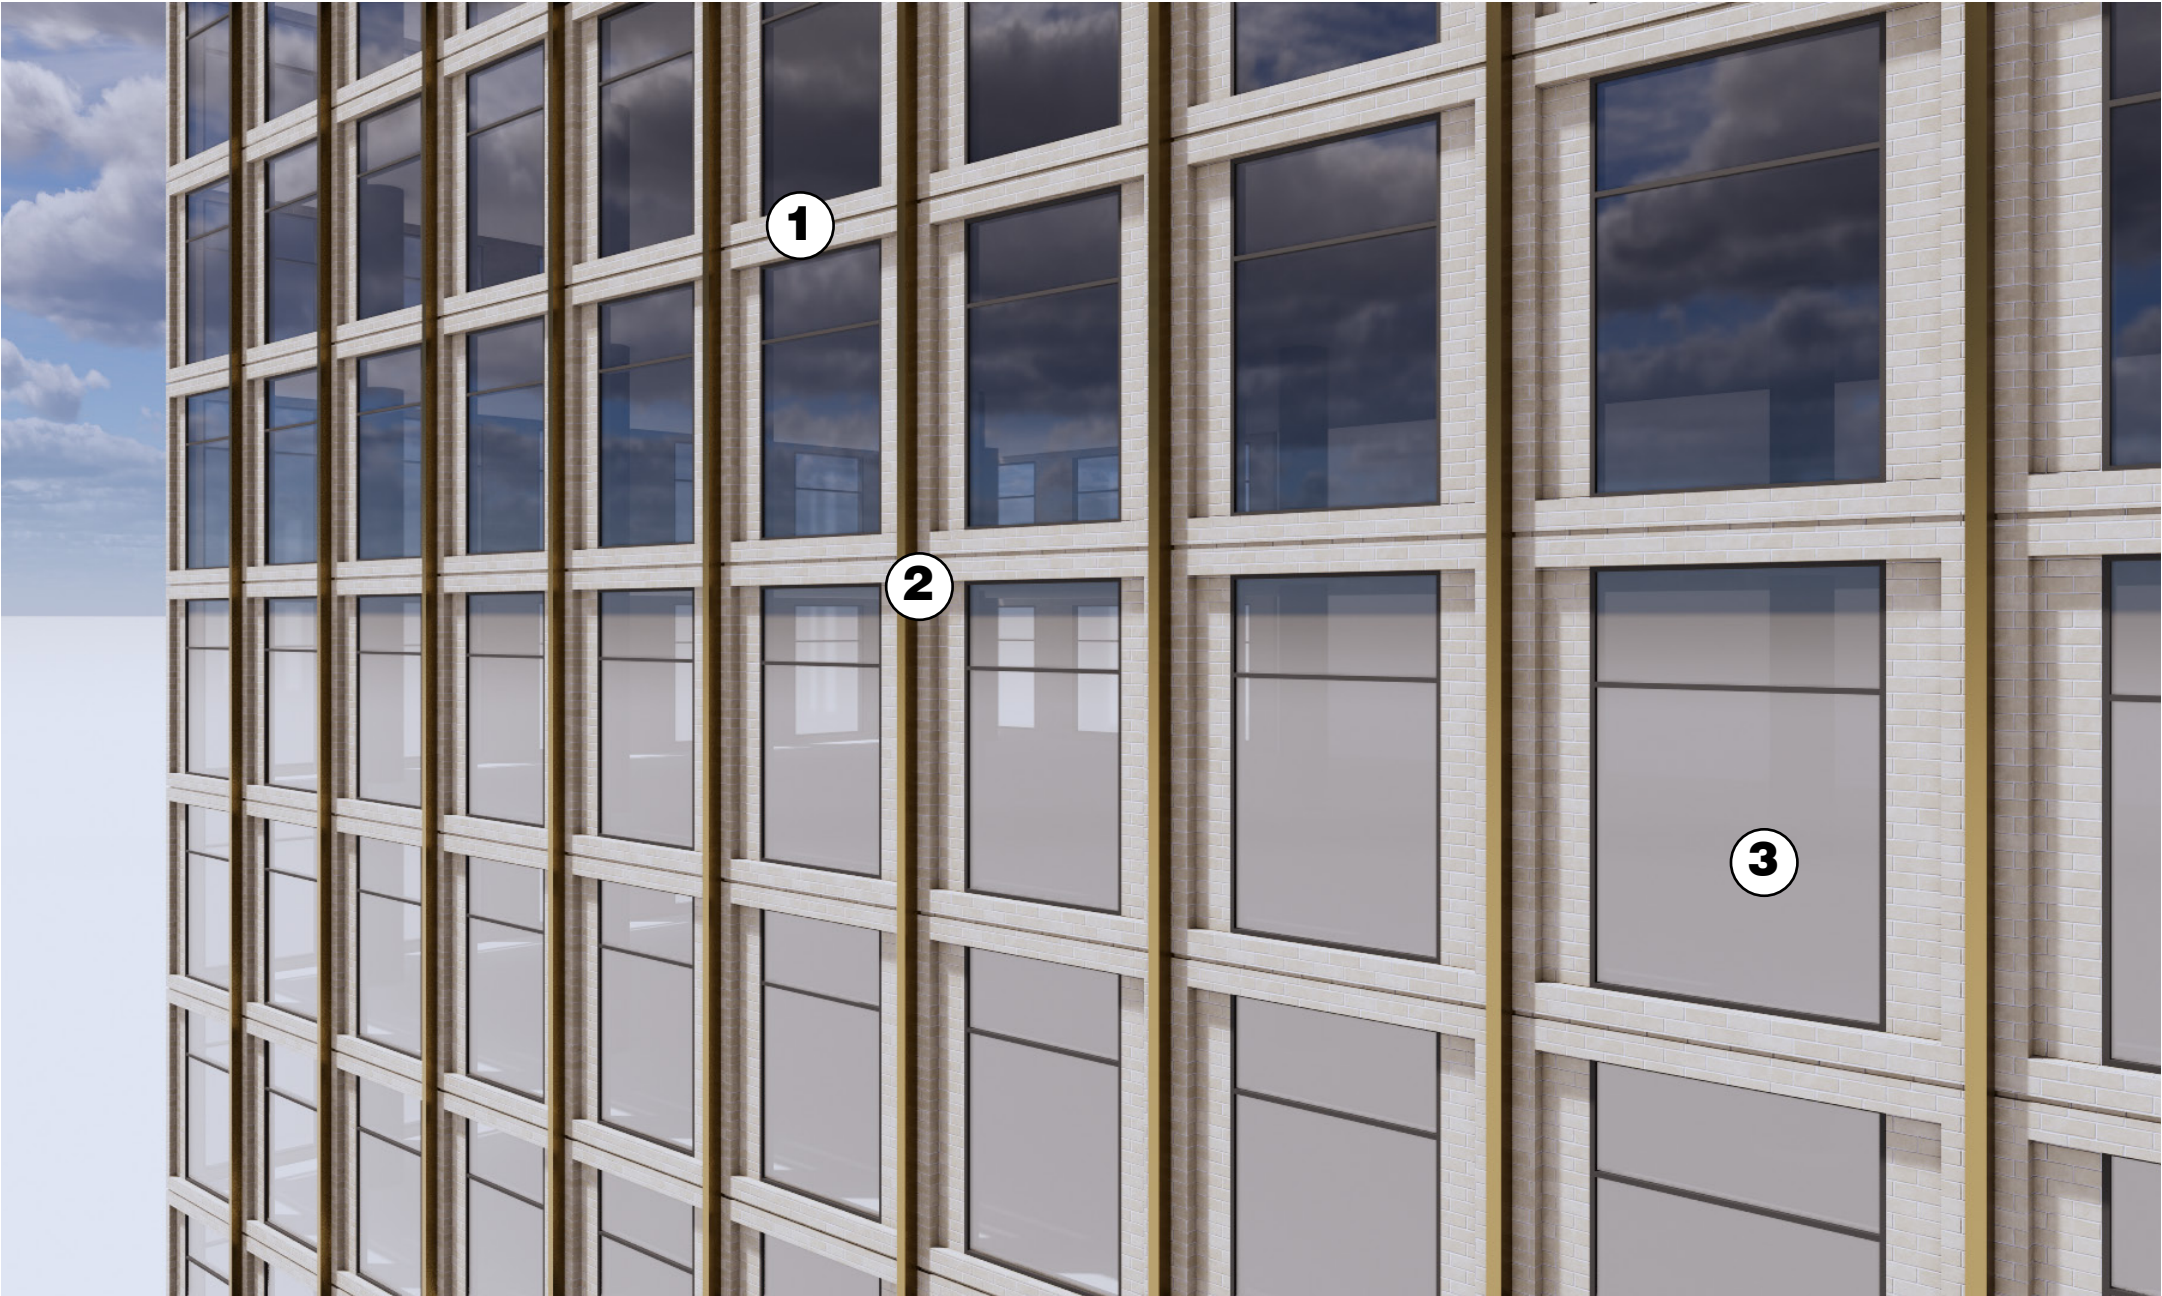

- 1. BEIGE BRICK VENEER ON PRECAST PANEL
- 2. BRONZE METAL FINIS
- 3. CODE COMPLAINT HIGH TRANSPERANCY GLASS

TOWER DESIGN
ROOFTOP AMENITY

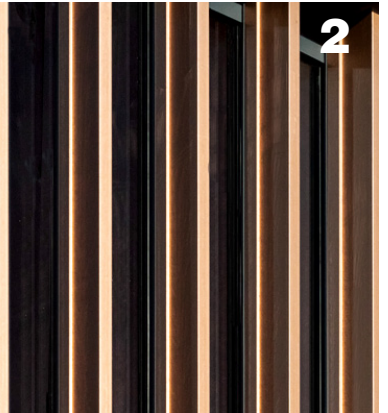
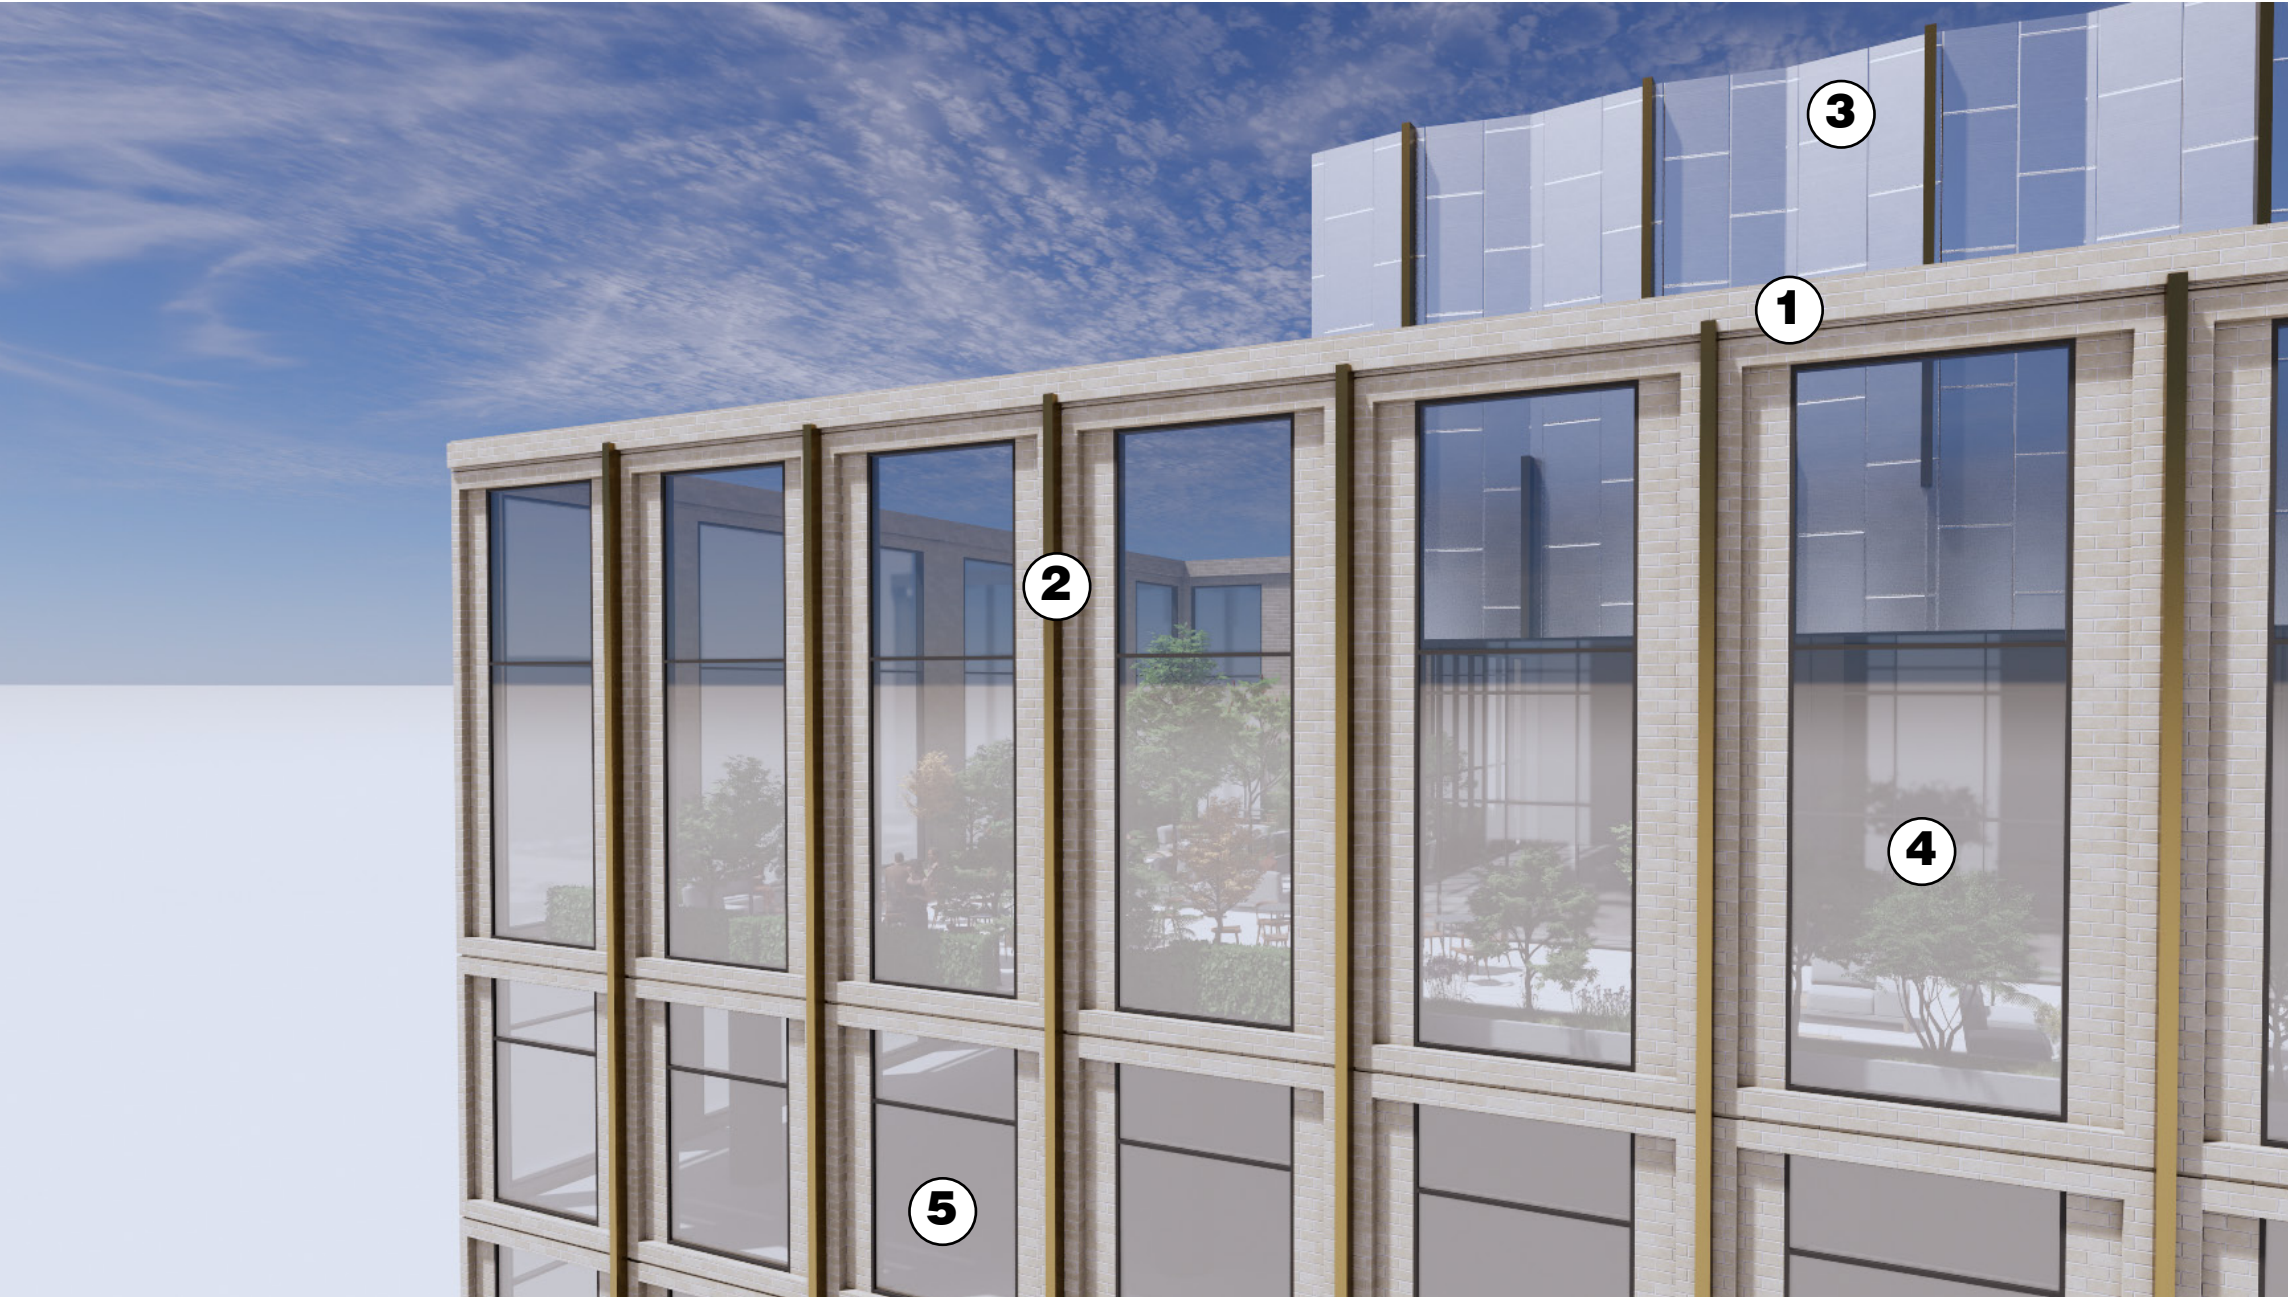


- 1. BEIGE BRICK VENEER ON PRECAST PANEL
- 2. BRONZE METAL FINIS
- 3. METAL PANEL SYSTEM WITH BRUSHED FINISH
- 4. OUTDOOR ROOFTOP AMENITY
- 5. CODE COMPLAINT HIGH TRANSPERANCY GLASS



OFFICE BUILDING CORE

**BUILDING CORE
CORE LOCATION**




CONVENTIONAL OFFICE CORE

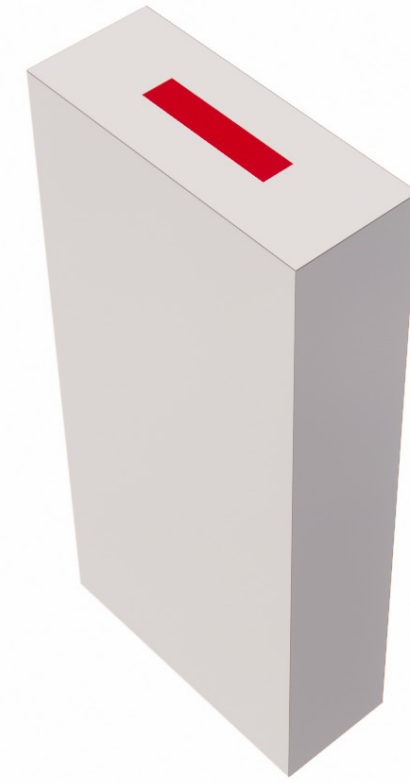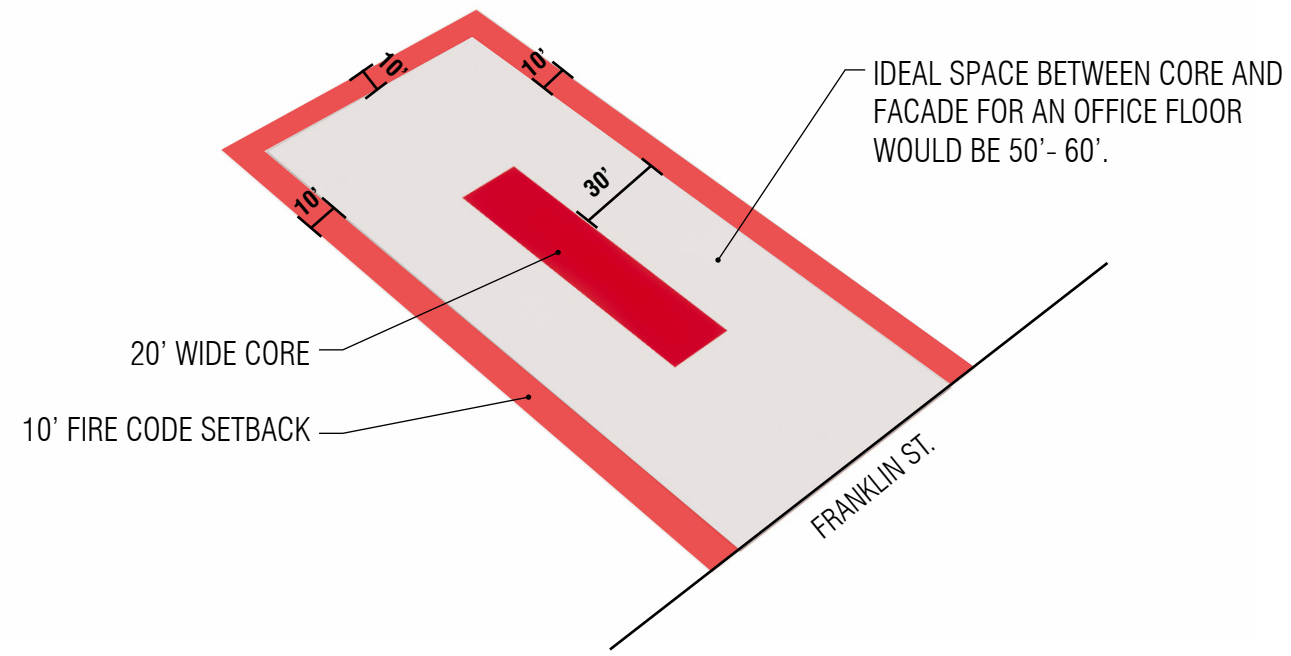



PROPOSED OFFICE CORE

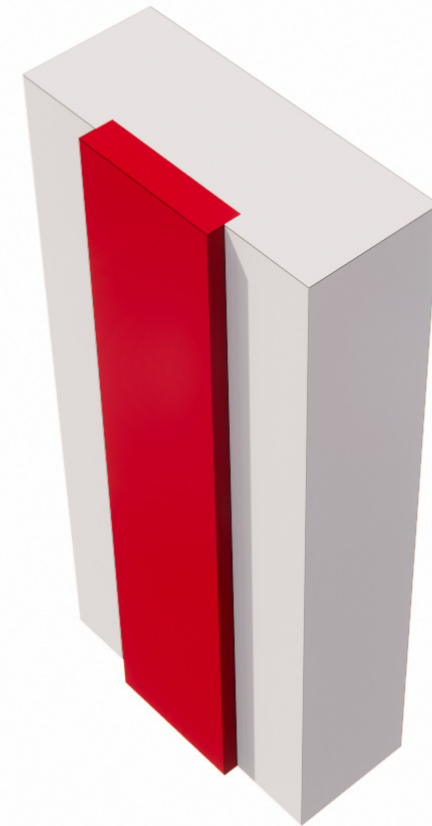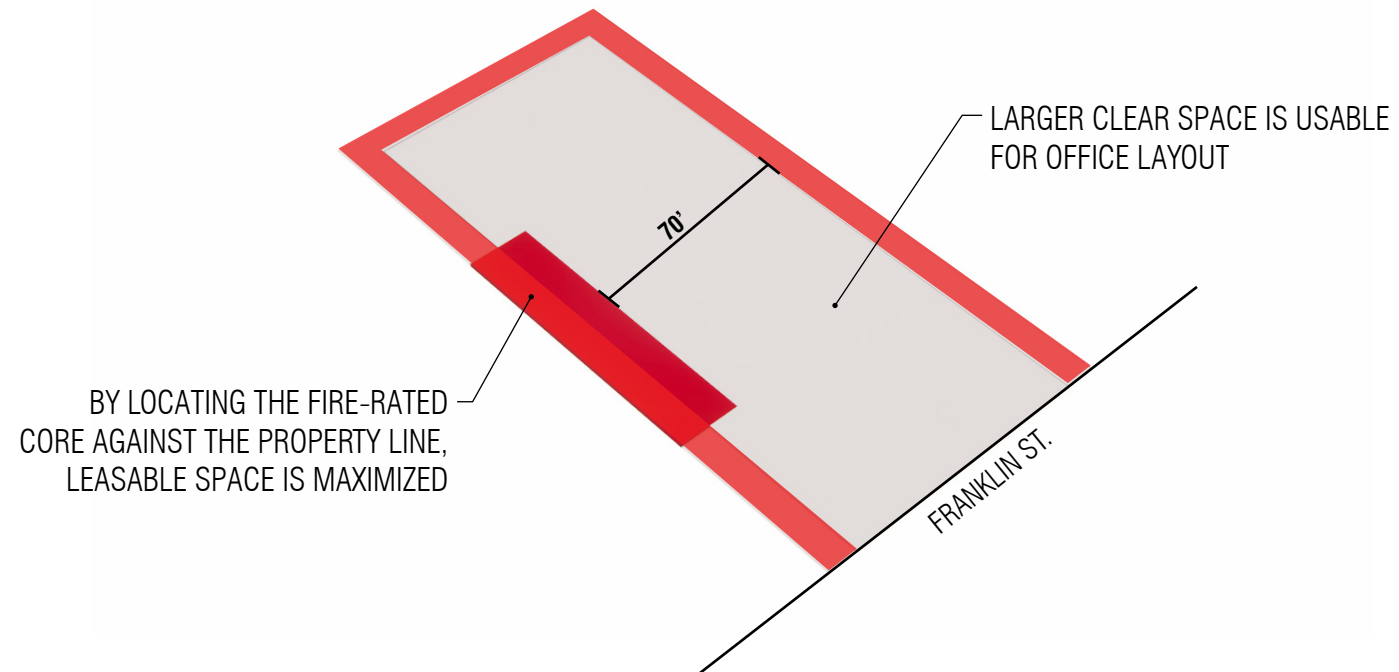

BUILDING CORE
OFFICE CORE DESIGN

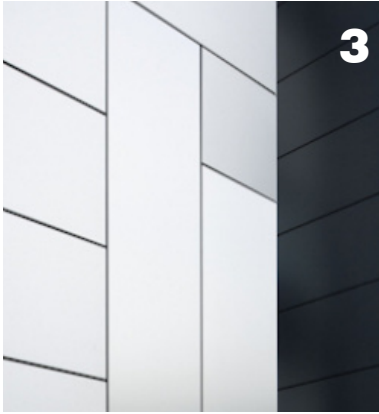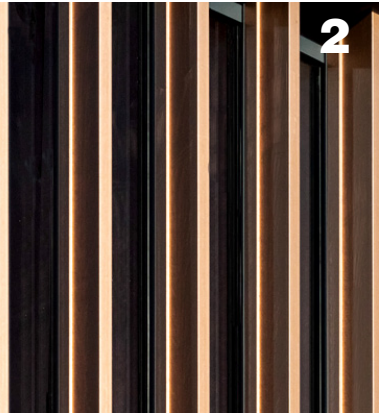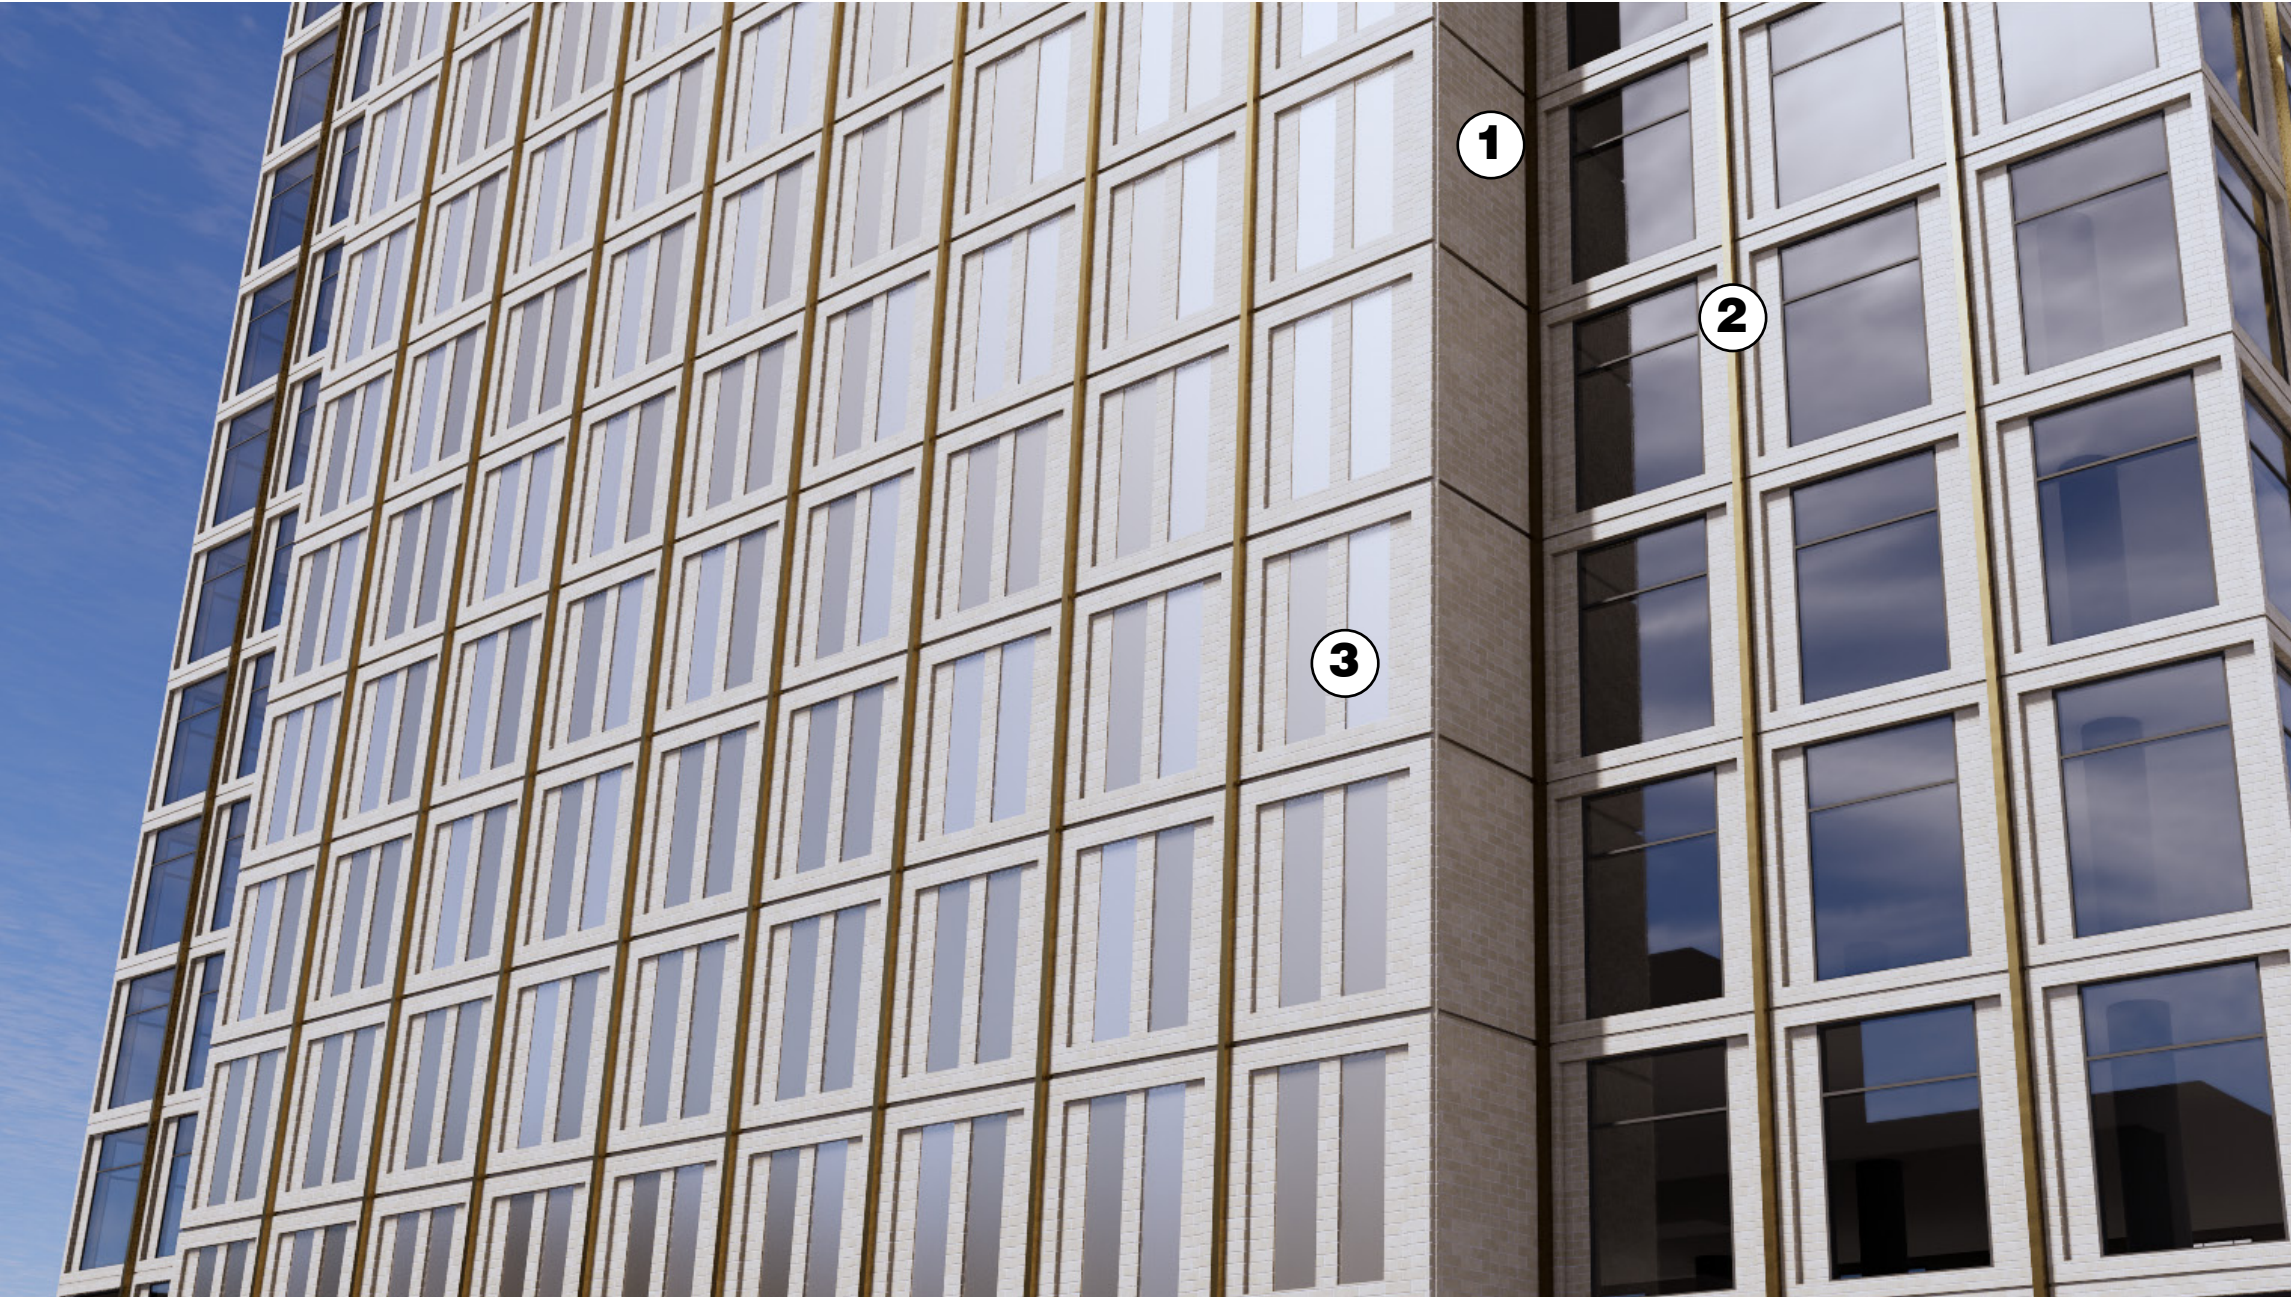

- 1. BEIGE BRICK VENEER ON PRECAST PANEL
- 2. BRONZE METAL FIN
- 3. TWO SHADE BRUSHED ALUMINUM METAL PANEL

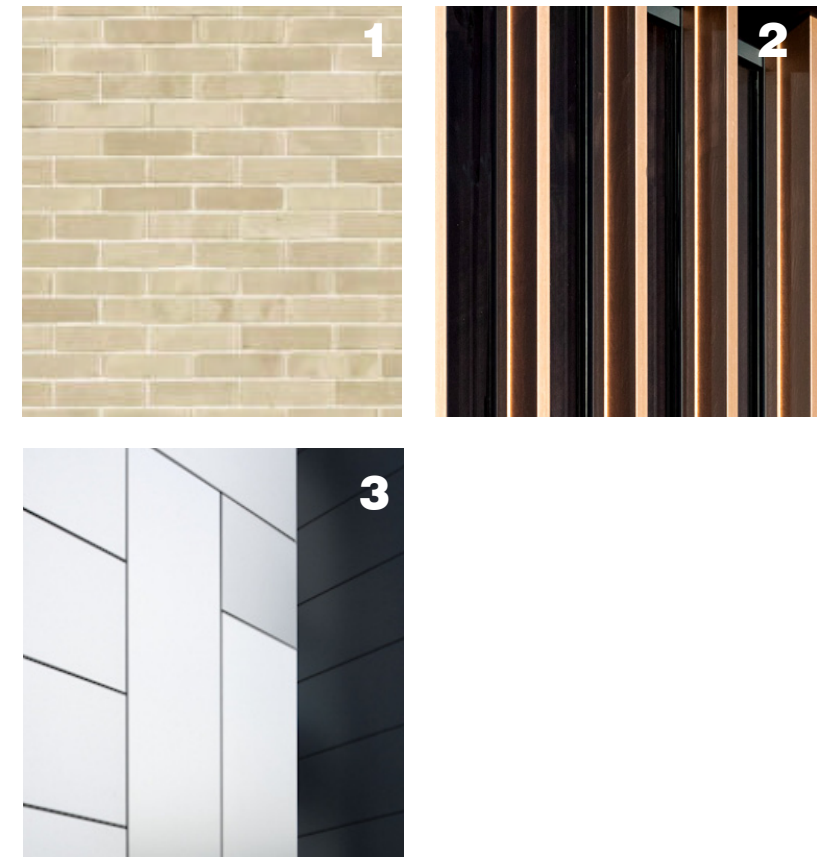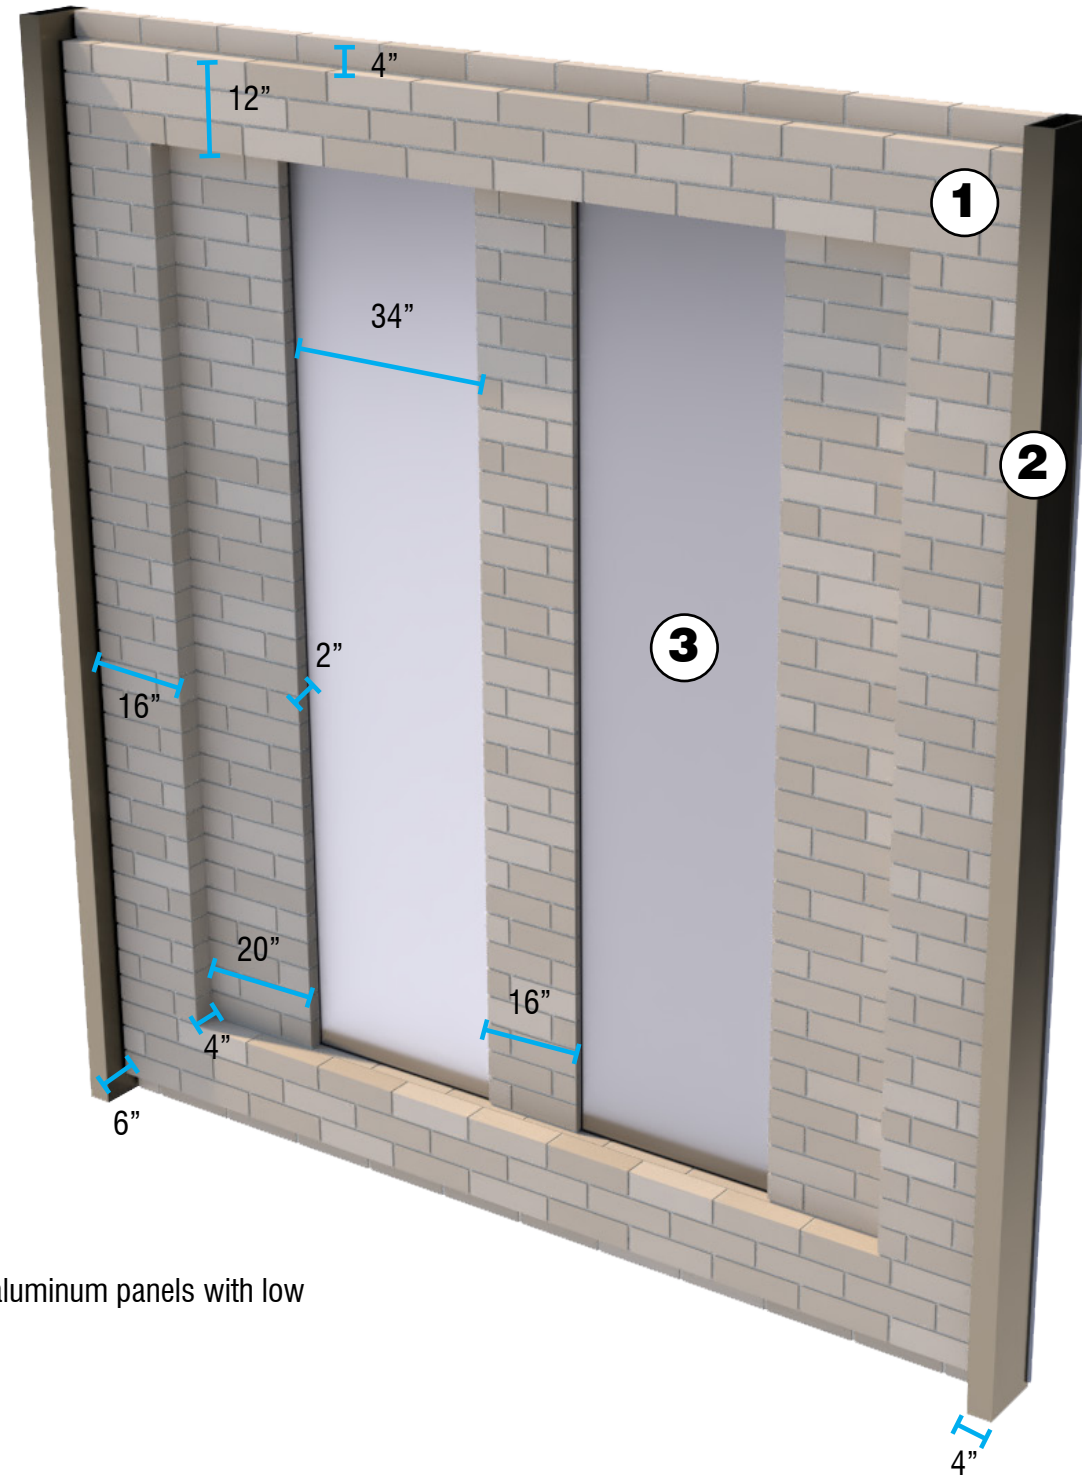


1. BEIGE BRICK VENEER ON PRECAST PANEL
2. BRONZE METAL FIN
3. TWO SHADE BRUSHED ALUMINUM METAL PANEL

FRANKLIN OFFICE PROPOSAL: 1431 Franklin St.

Precast system with variegated brick finish and brushed aluminum panels with low reflectivity. Brick color to match Financial Center Building.

*ALL MEASUREMENTS ARE APPROXIMATE AND SUBJECT TO ENGINEERING AND CONSTRUCTION REFINEMENT

OVERALL RENDERS

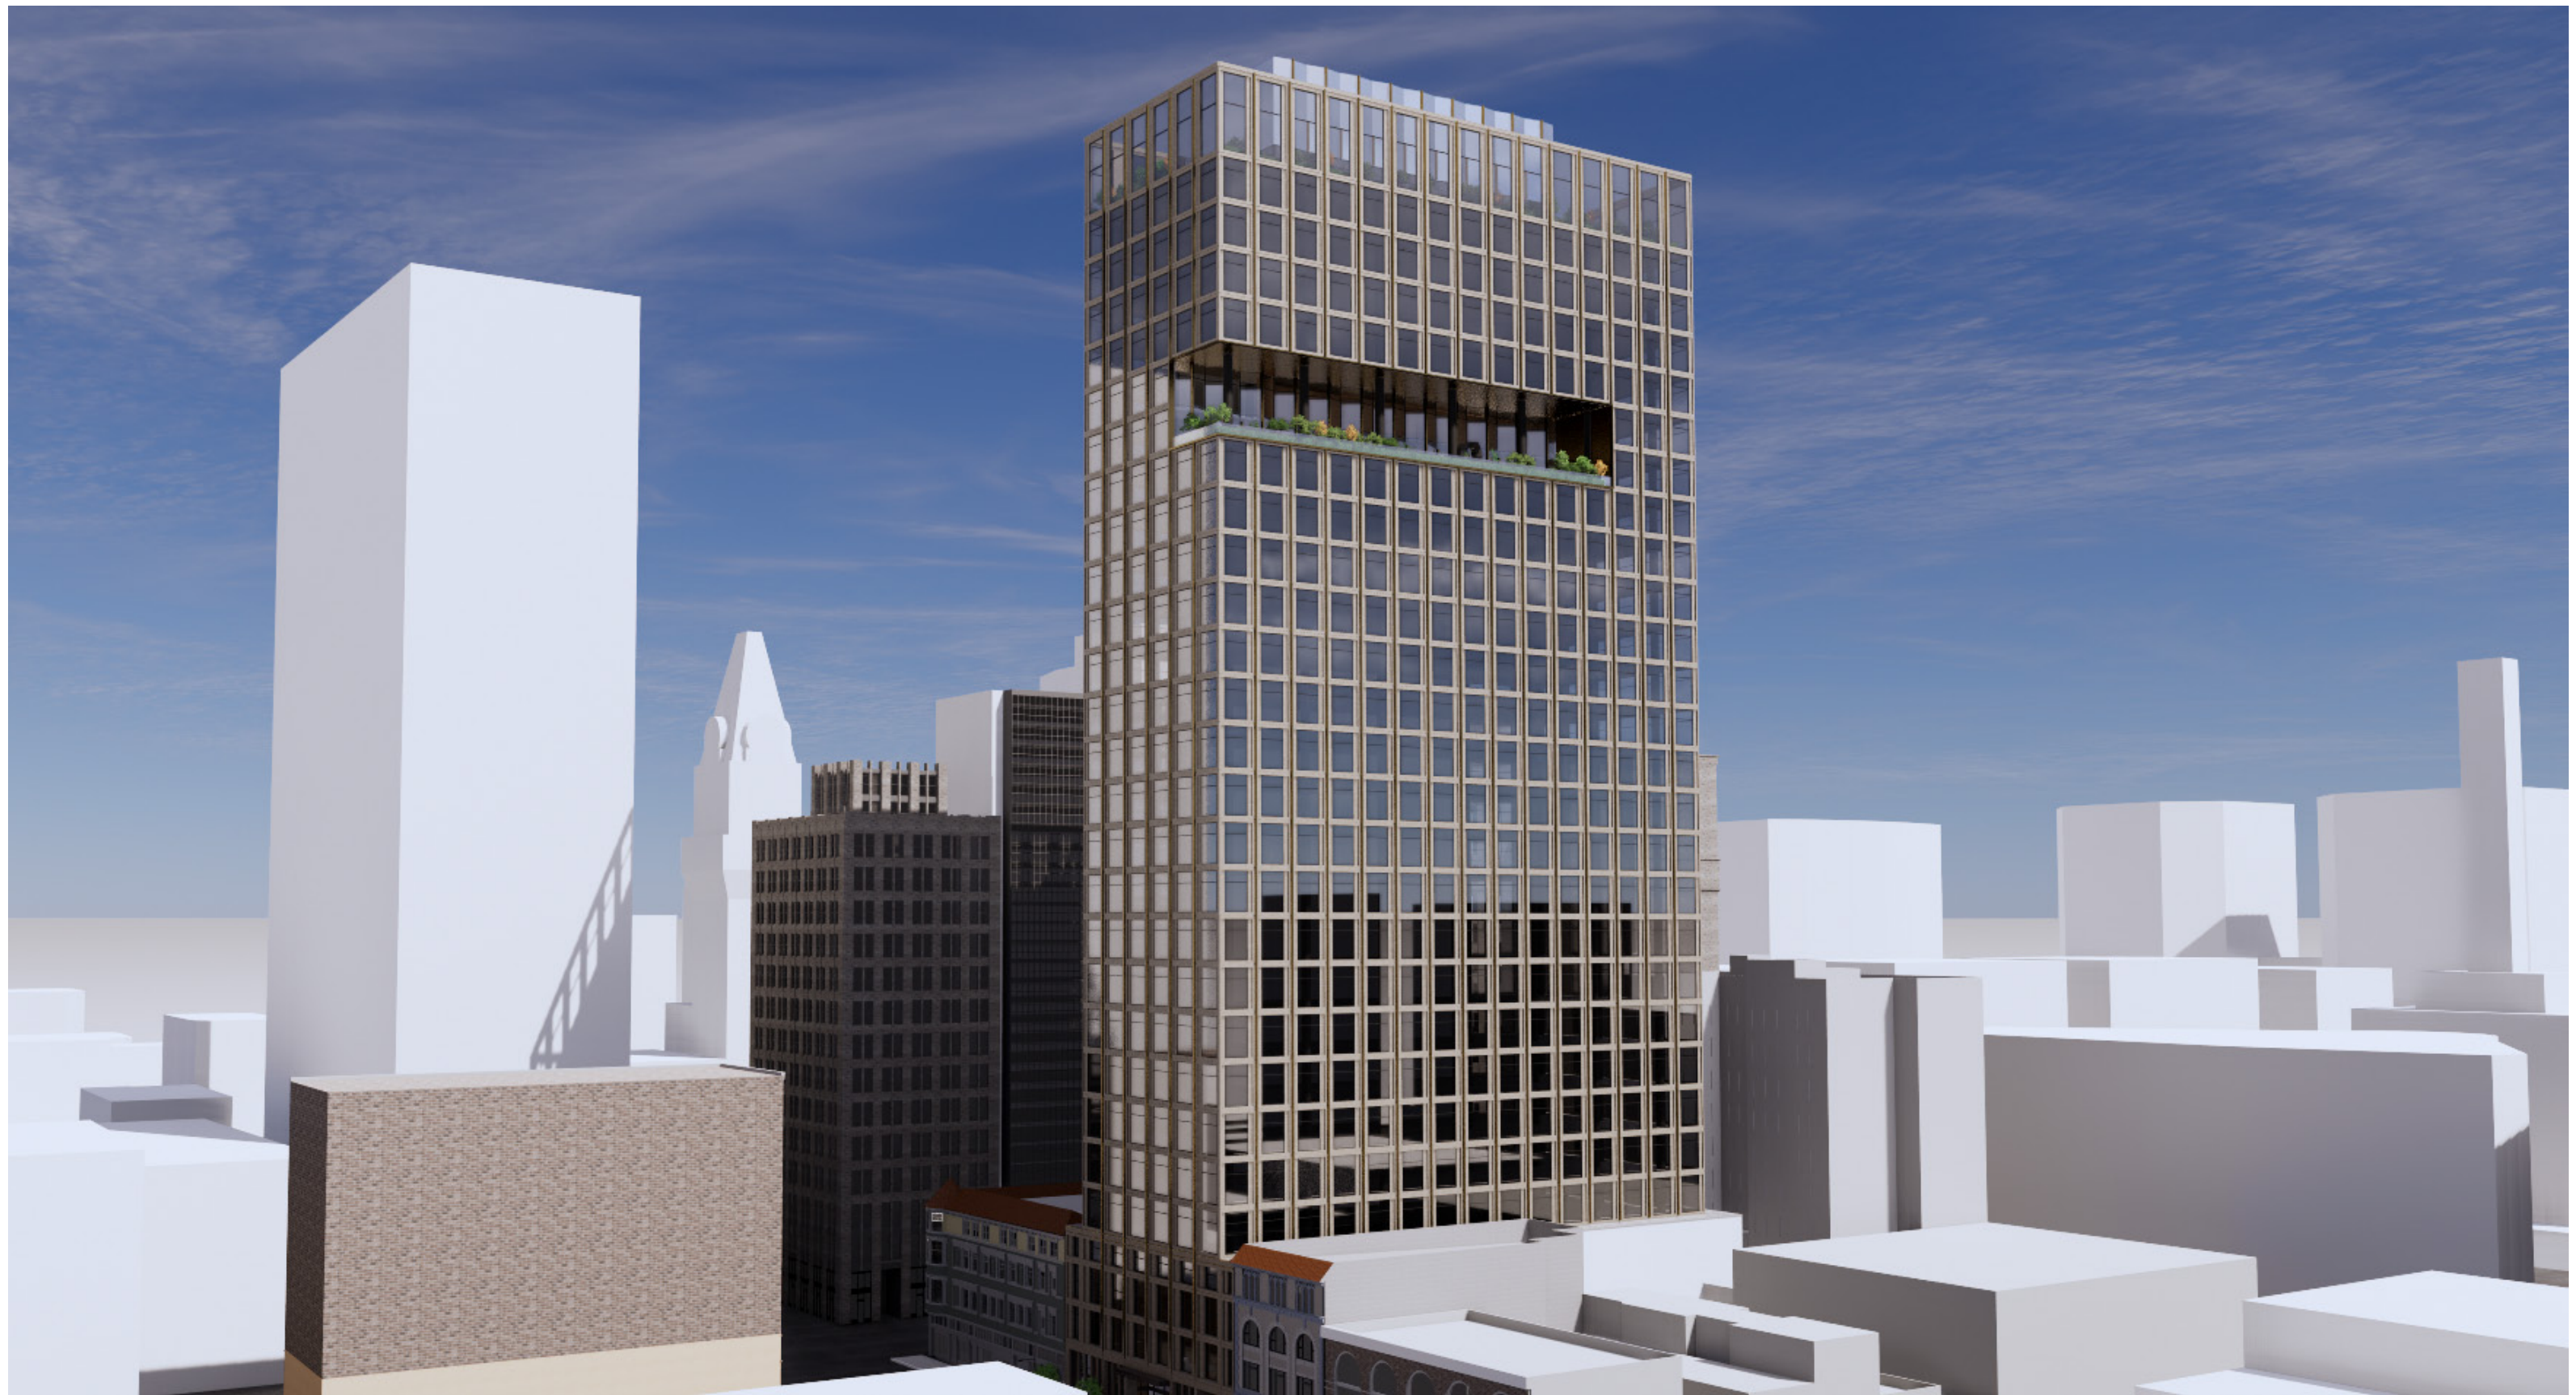

OVERALL LOOKING SOUTH-WEST



OVERALL LOOKING NORTH-WEST



FRANKLIN STREET ELEVATION LOOKING SOUTH-WEST



FRANKLIN STREET ELEVATION LOOKING NORTH-WEST

PROJECT IN CONTEXT

EXISTING



PROPOSED



VIEW FROM 14TH LOOKING WEST

EXISTING



VIEW FROM BROADWAY LOOKING EAST

PROPOSED




EXISTING



VIEW FROM CITY HALL LOOKING EAST


PROPOSED

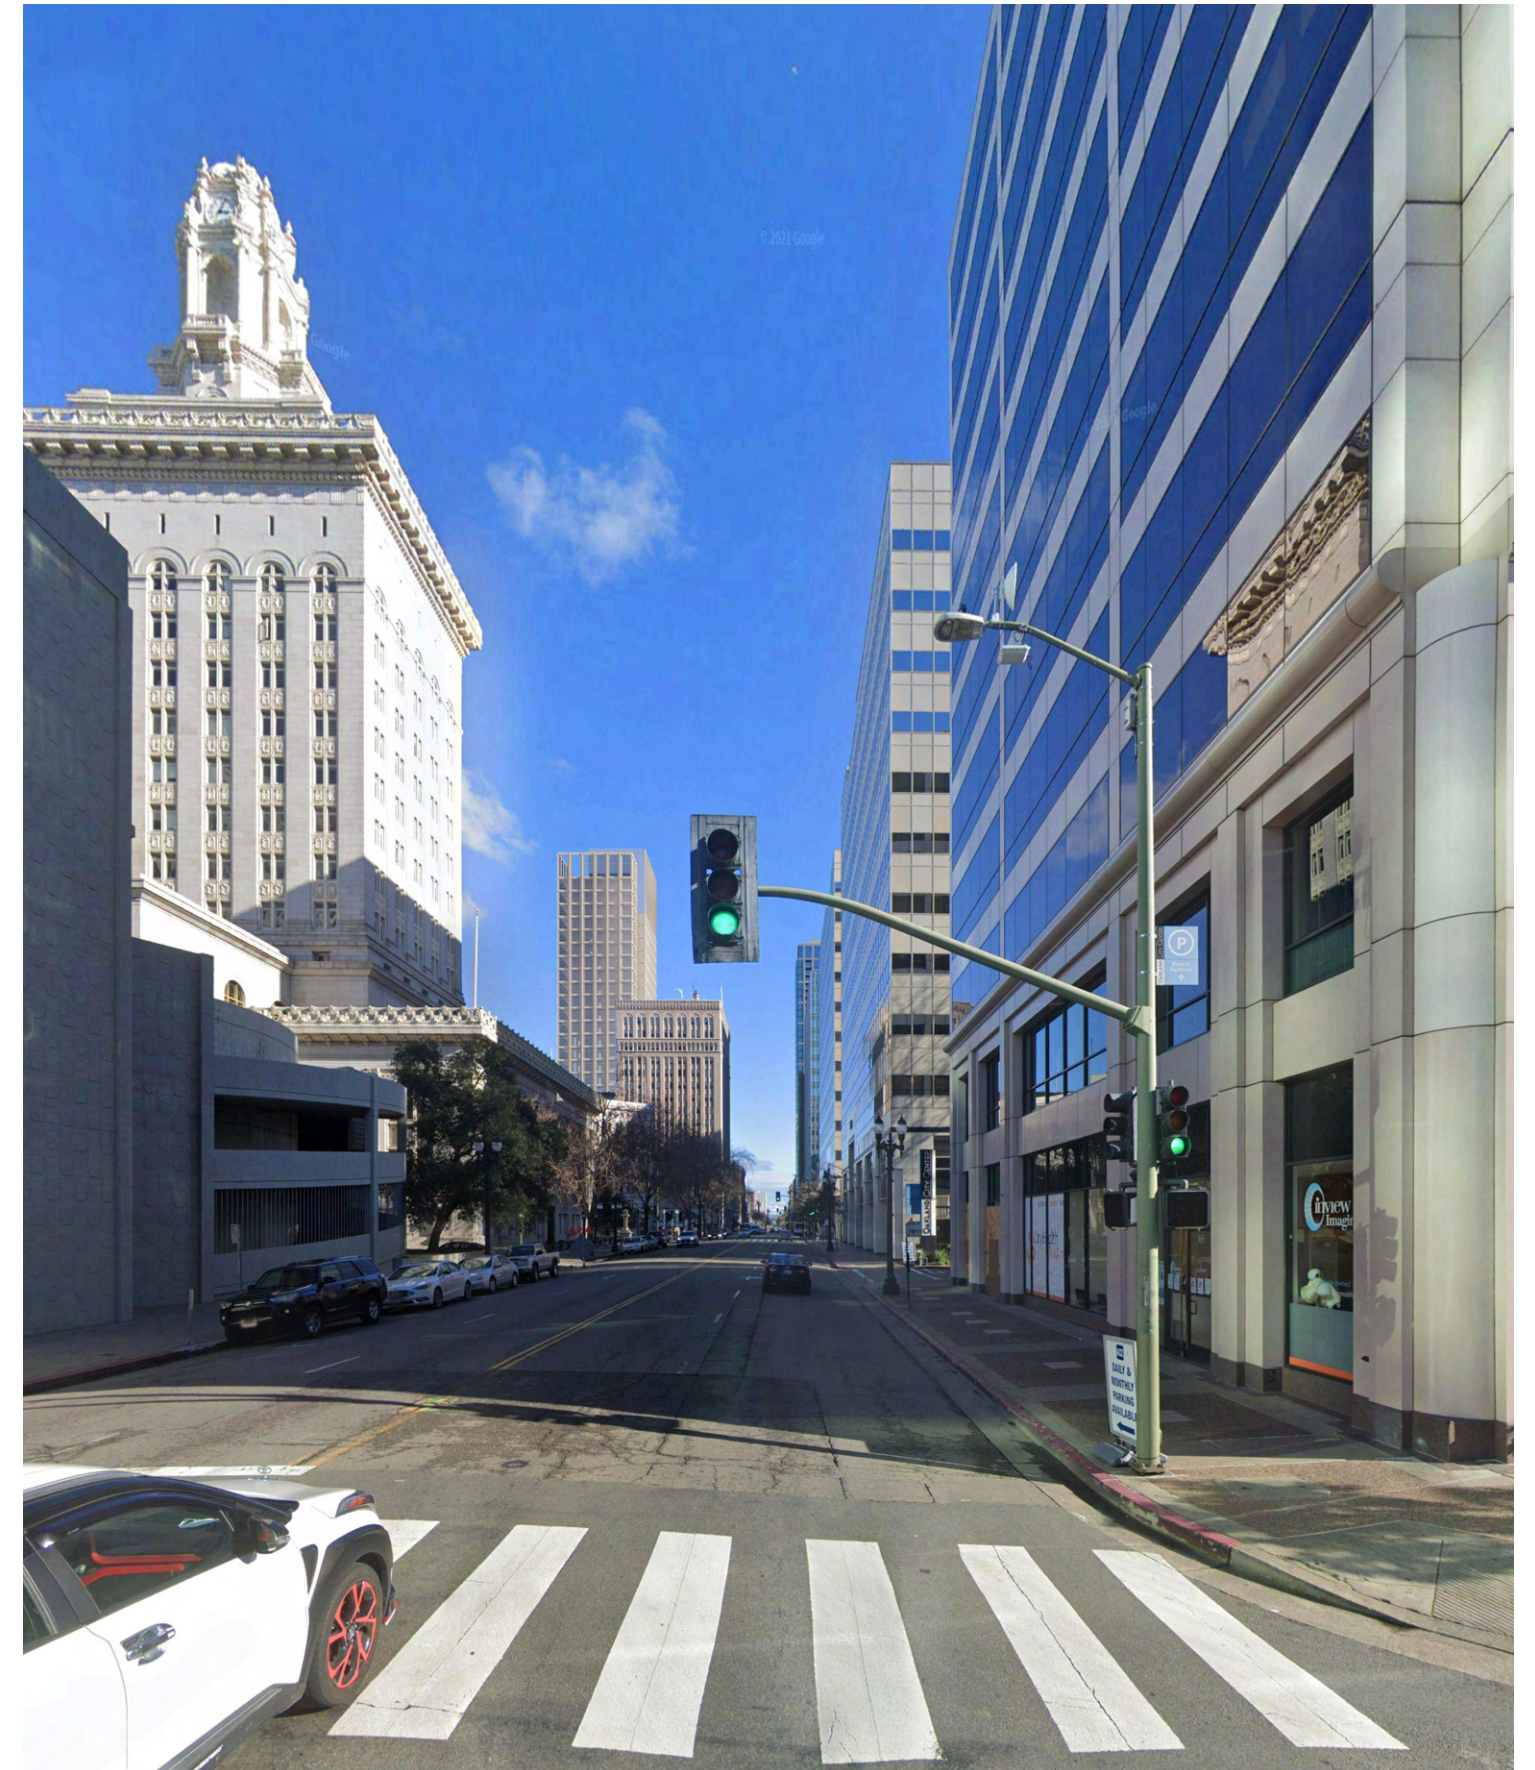

EXISTING




PROPOSED

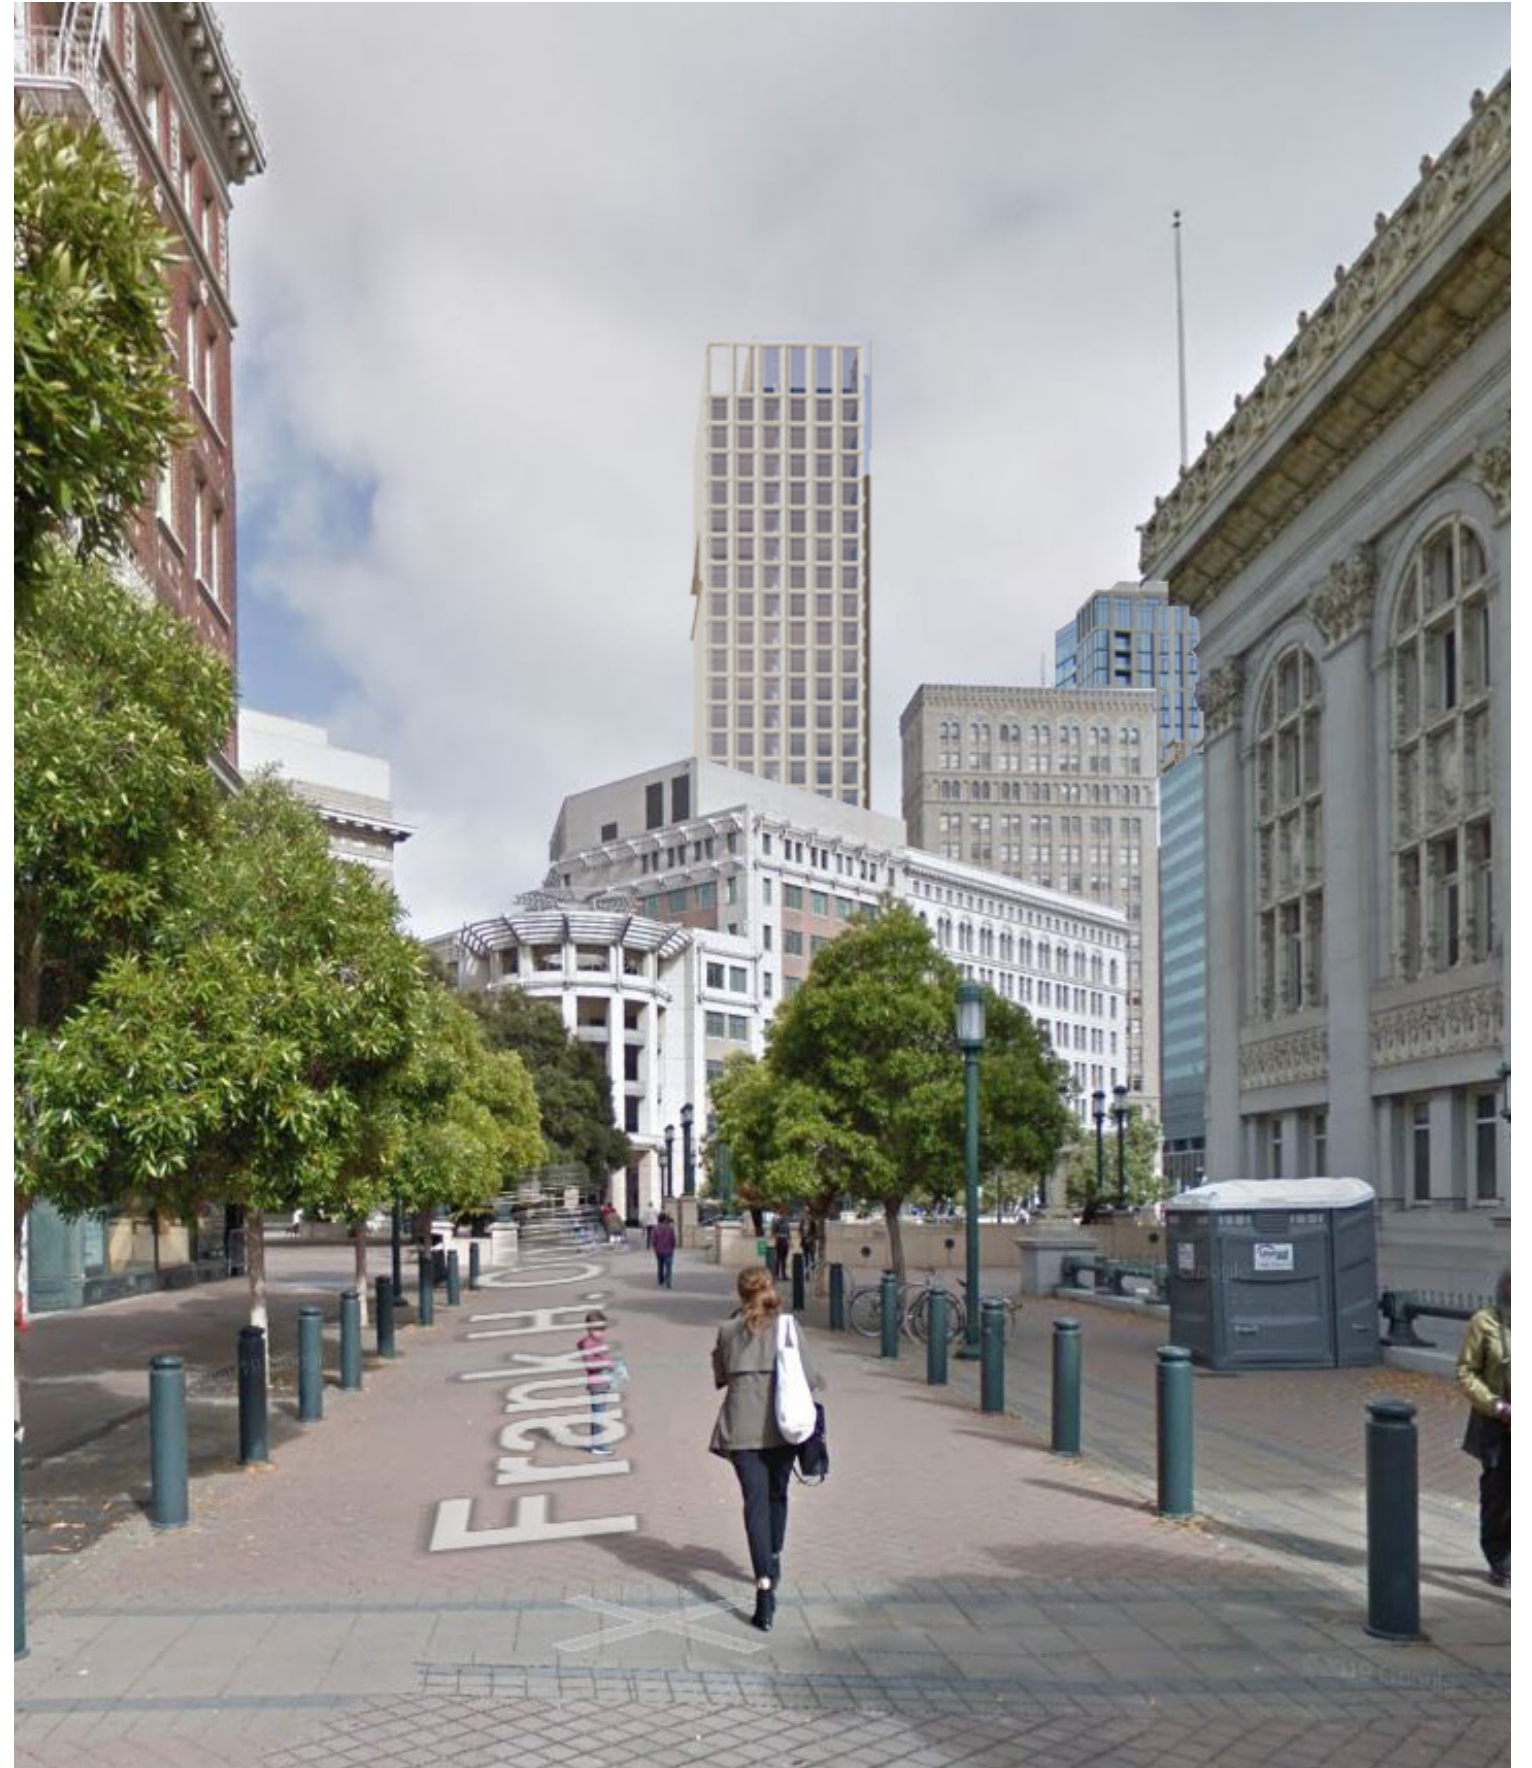


VIEW FROM CITY HALL LOOKING EAST

EXISTING

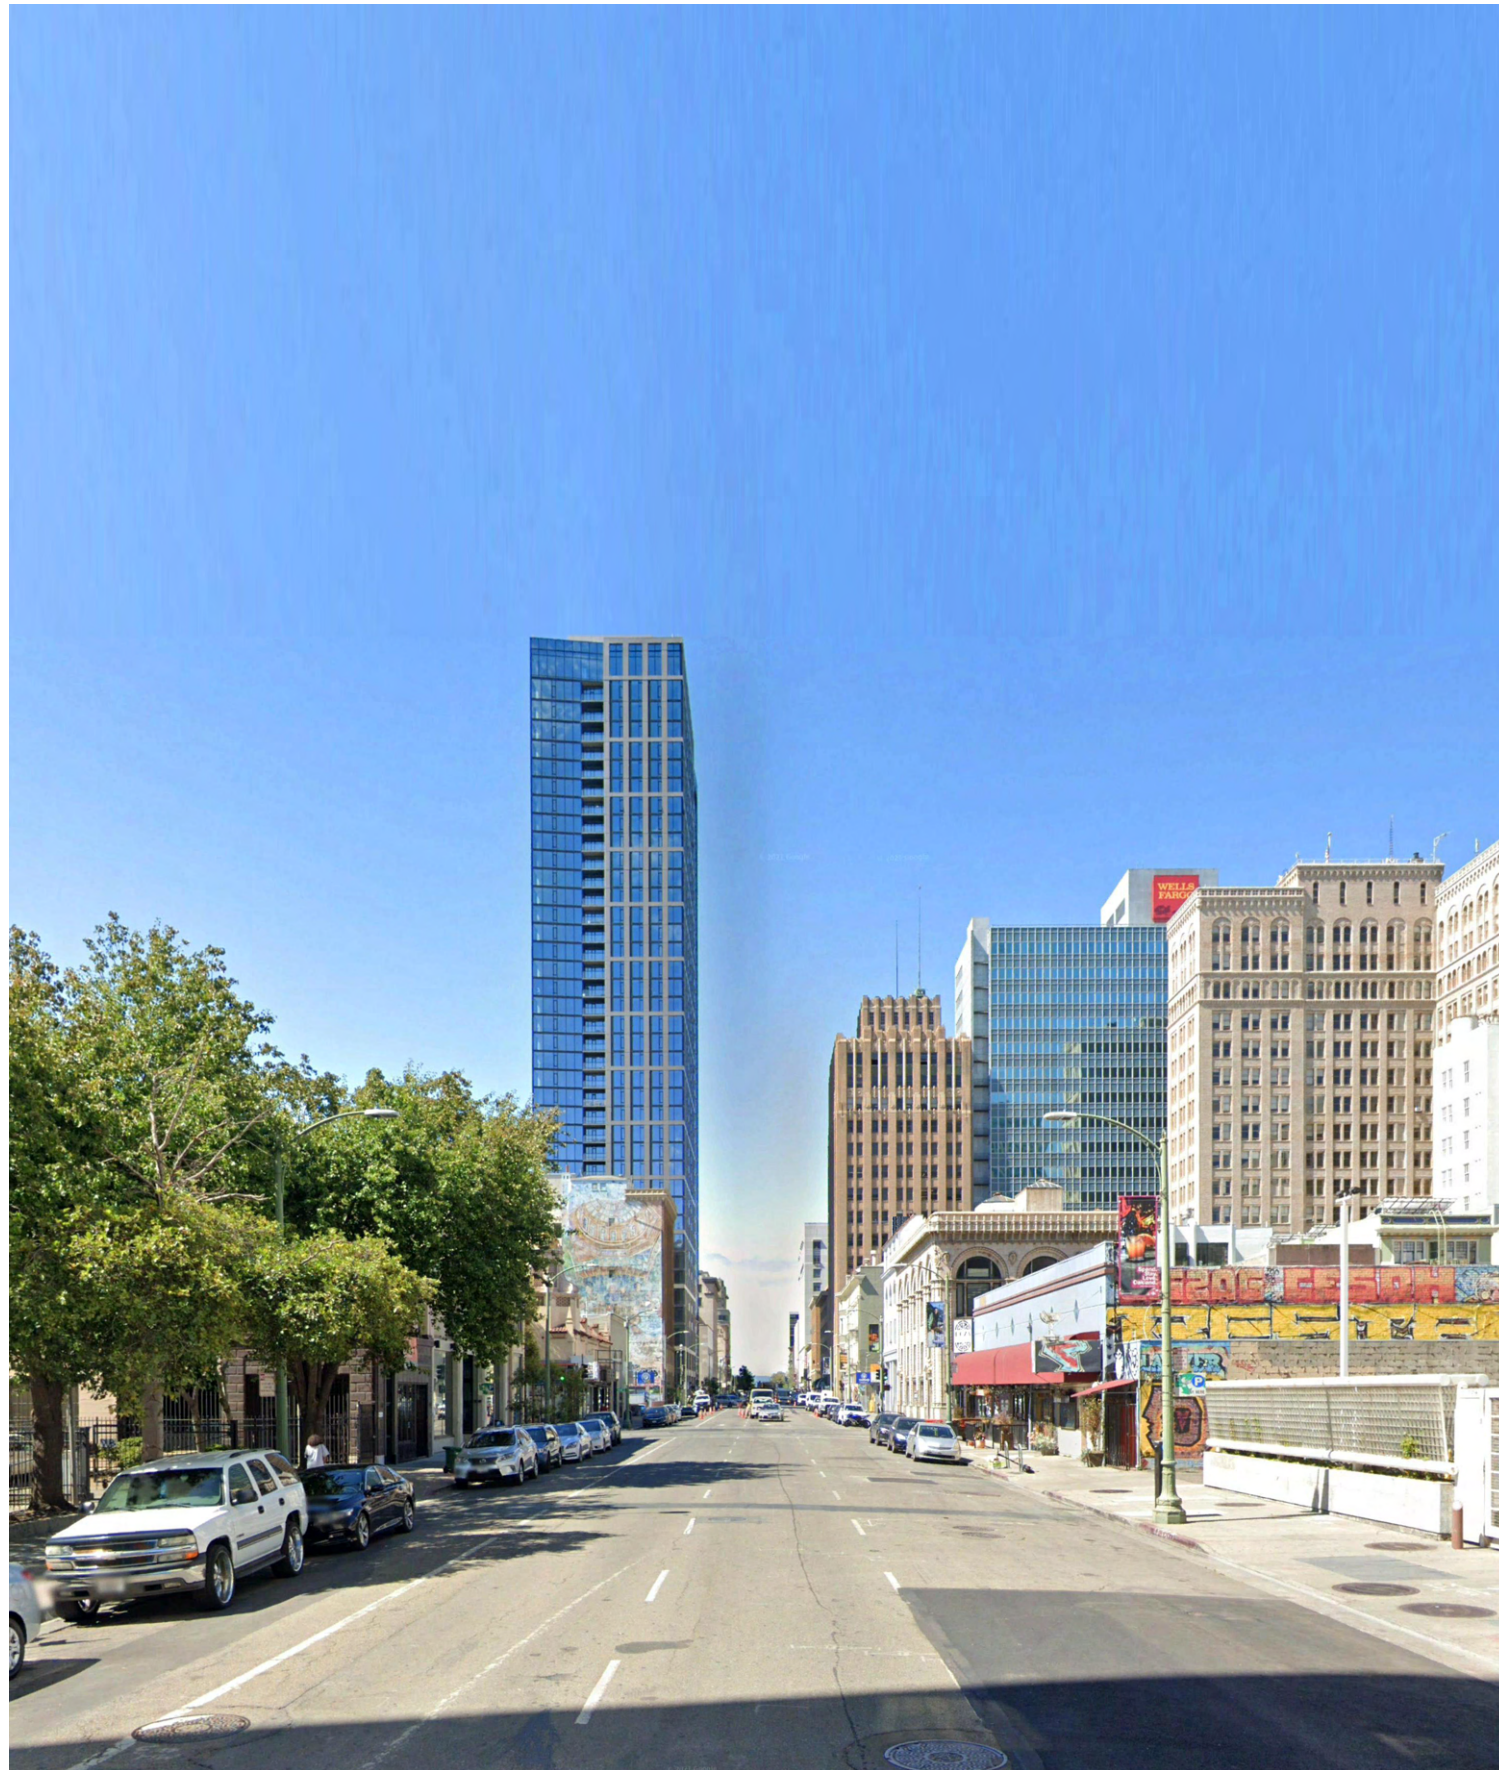

VIEW FROM CITY FRANKLIN LOOKING SOUTH


PROPOSED

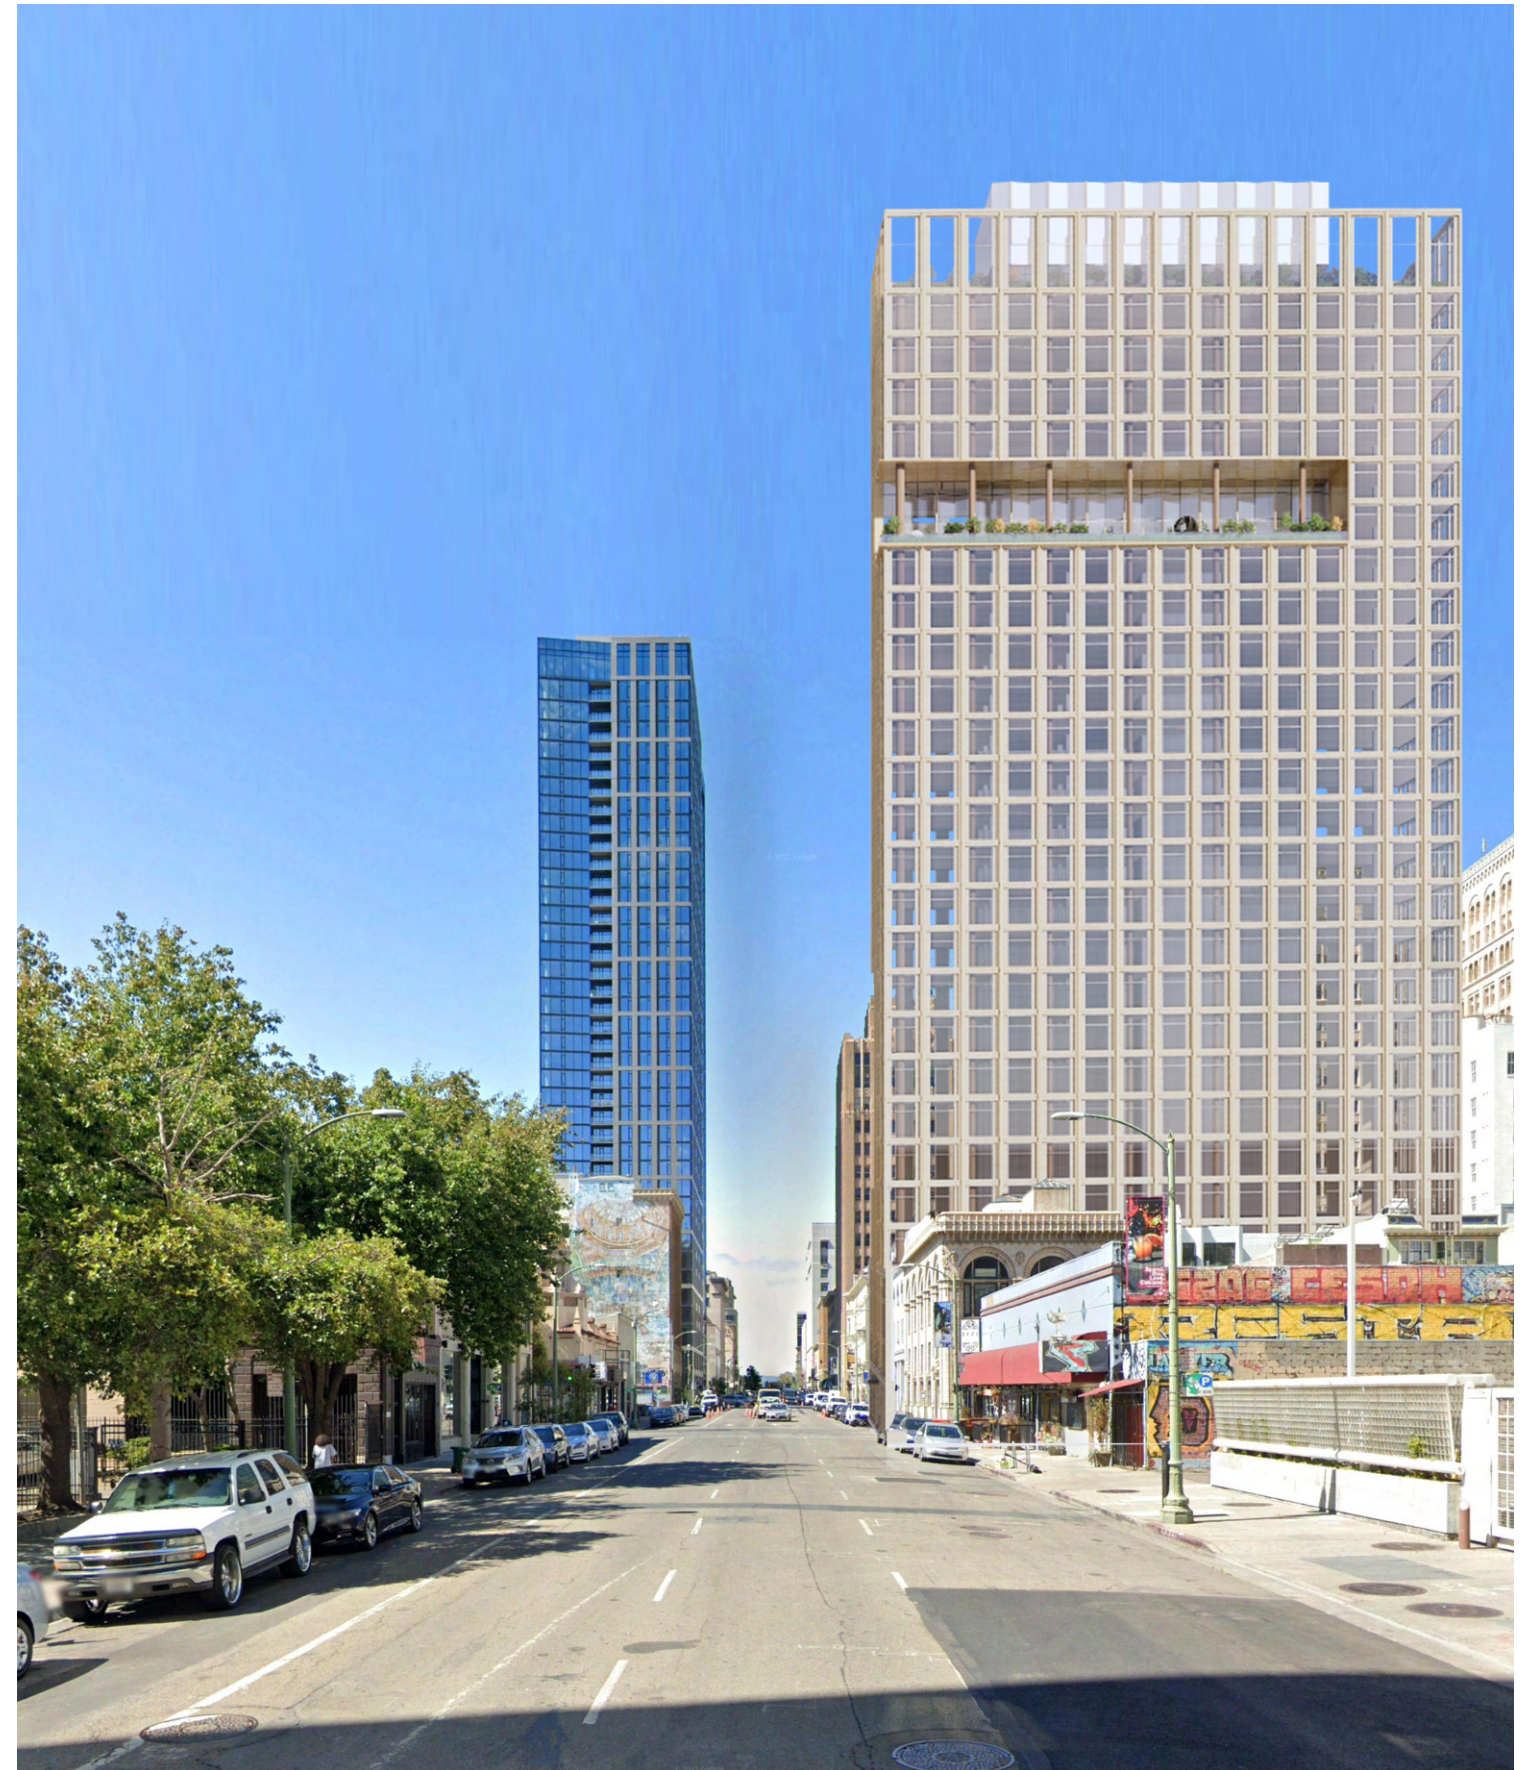

EXISTING




PROPOSED

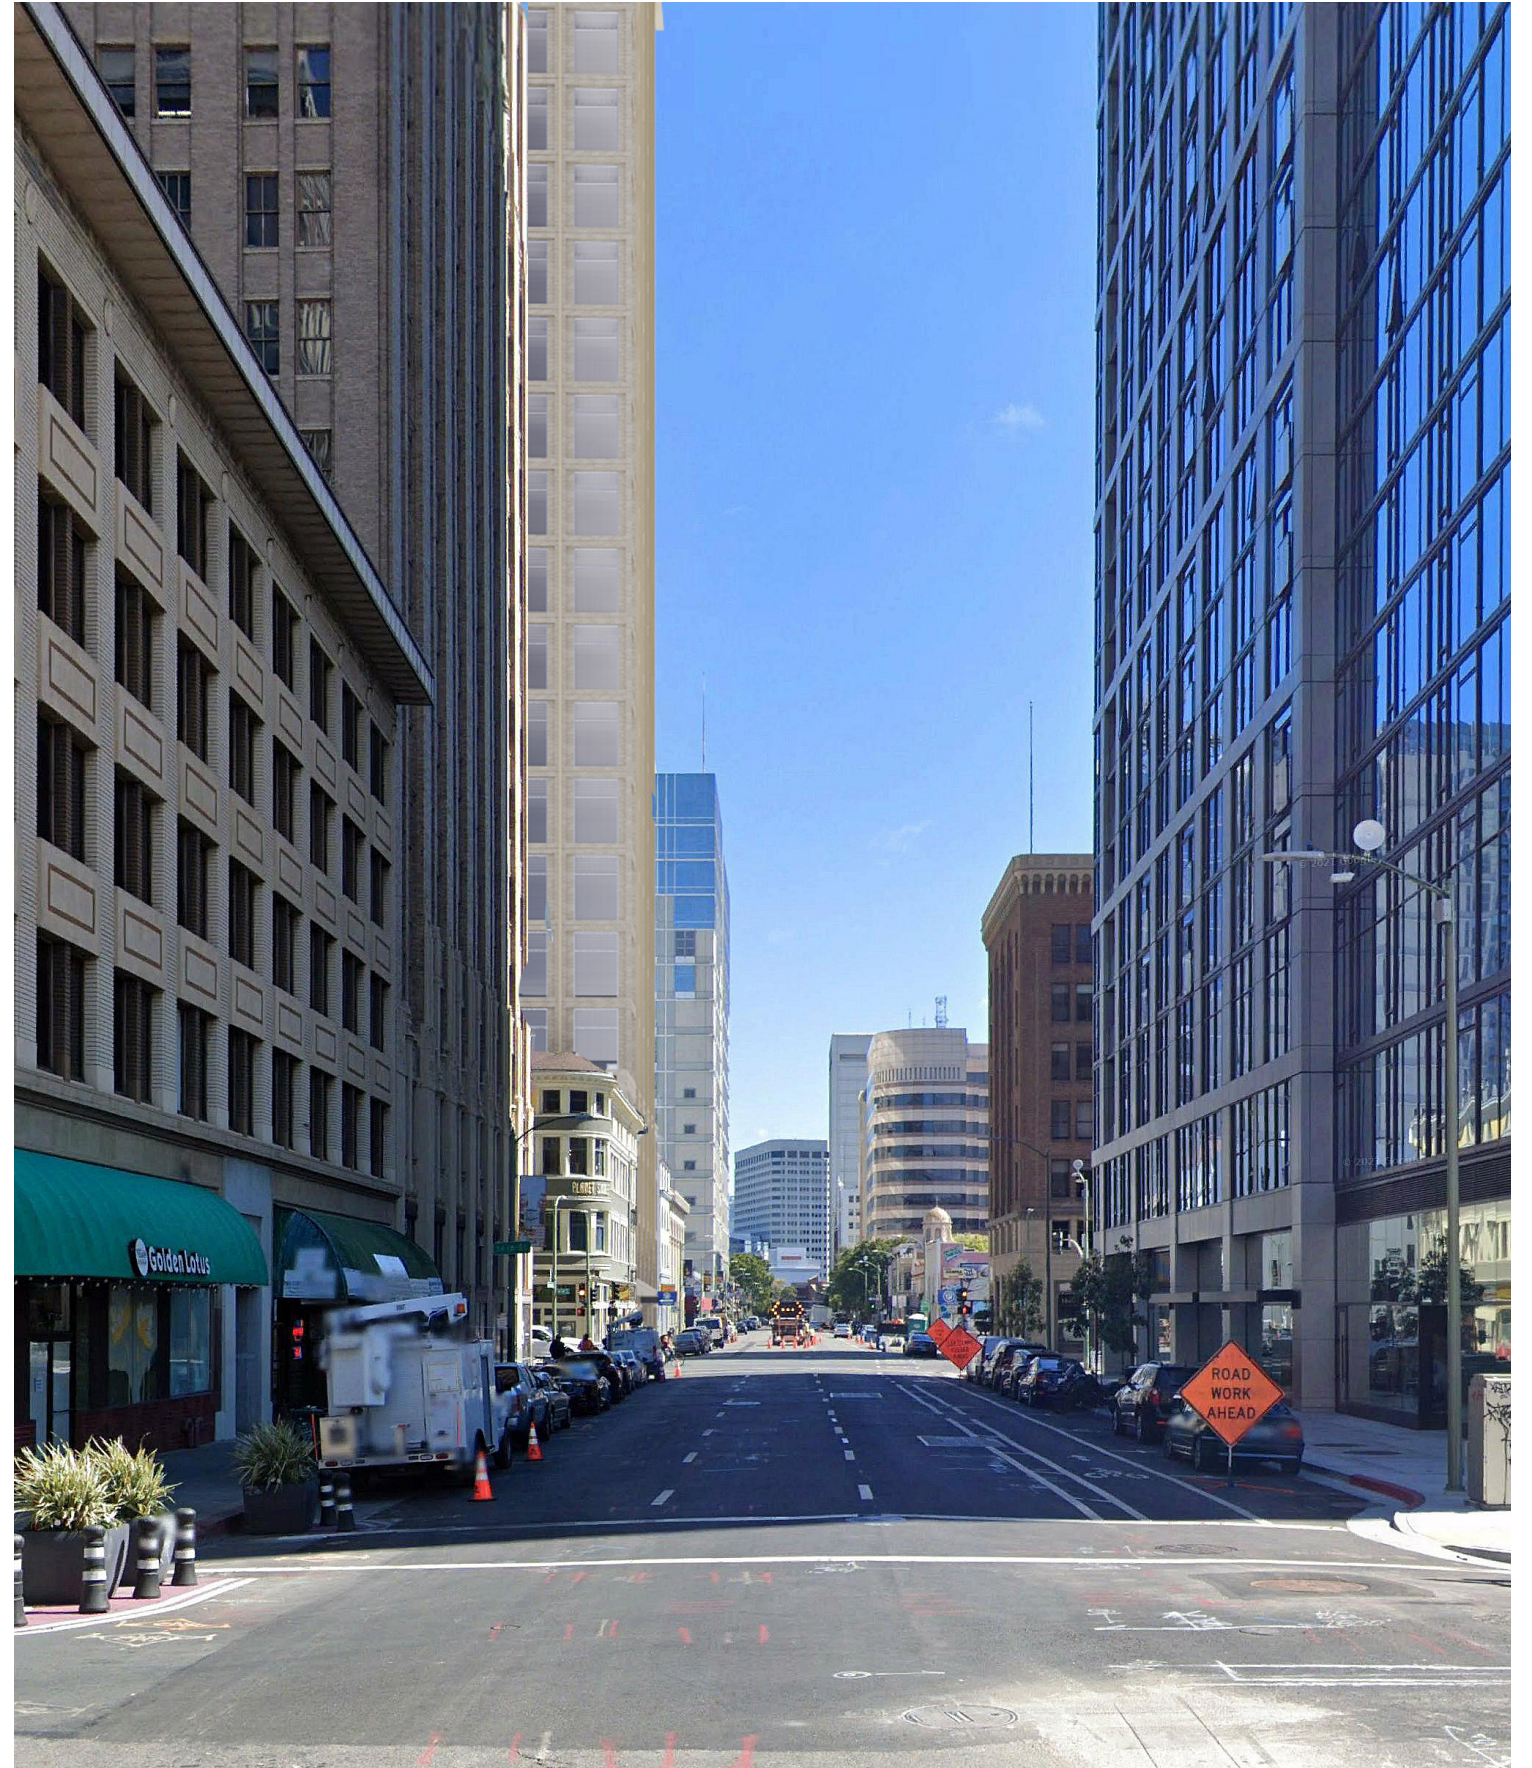


VIEW FROM FRANKLIN LOOKING NORTH

EXISTING

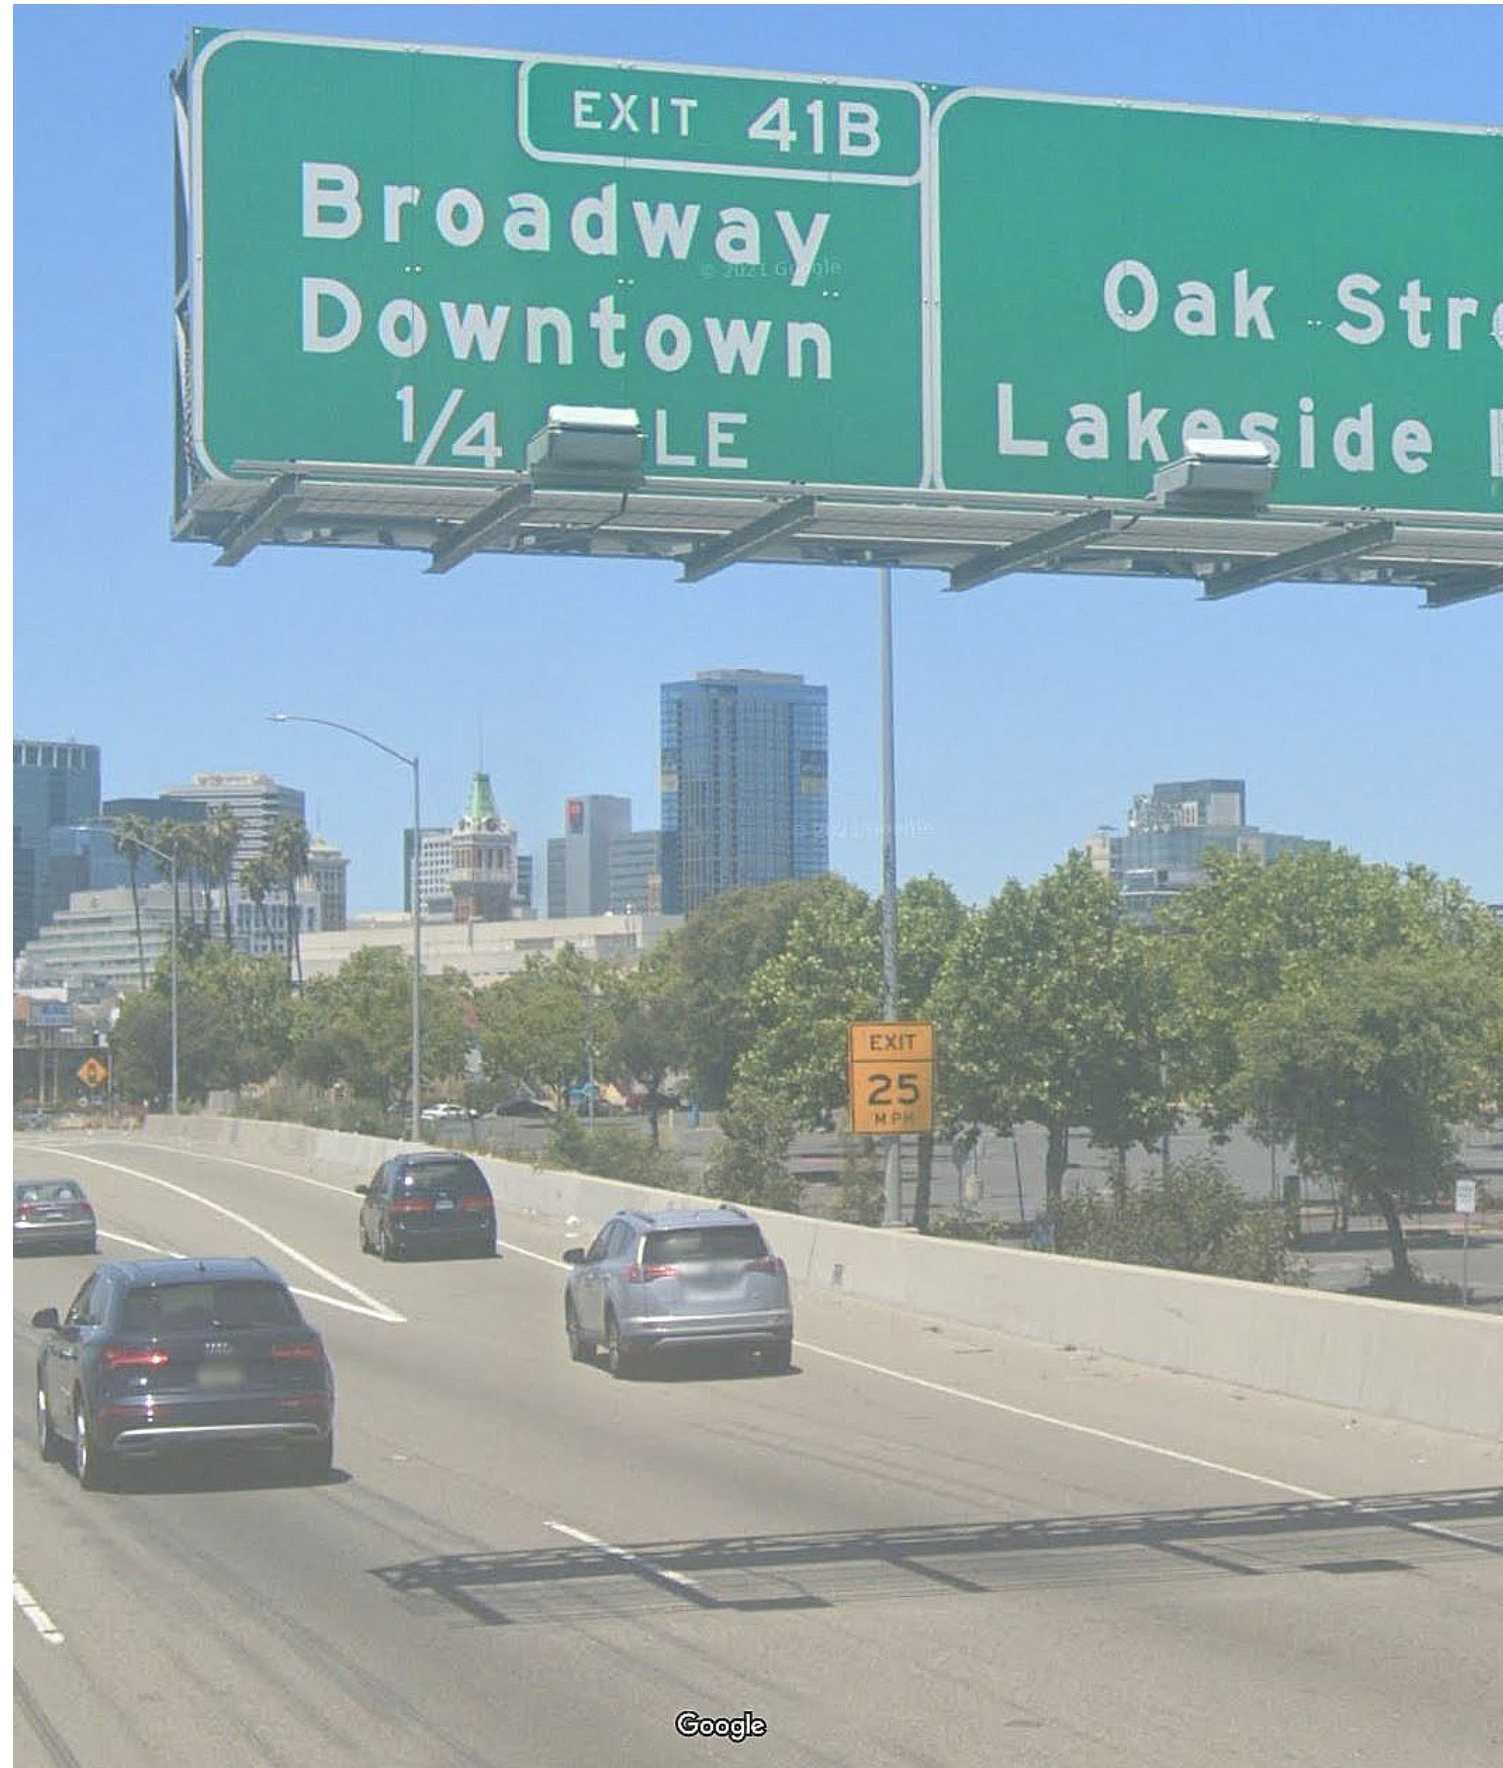

VIEW FROM I-880

PROPOSED

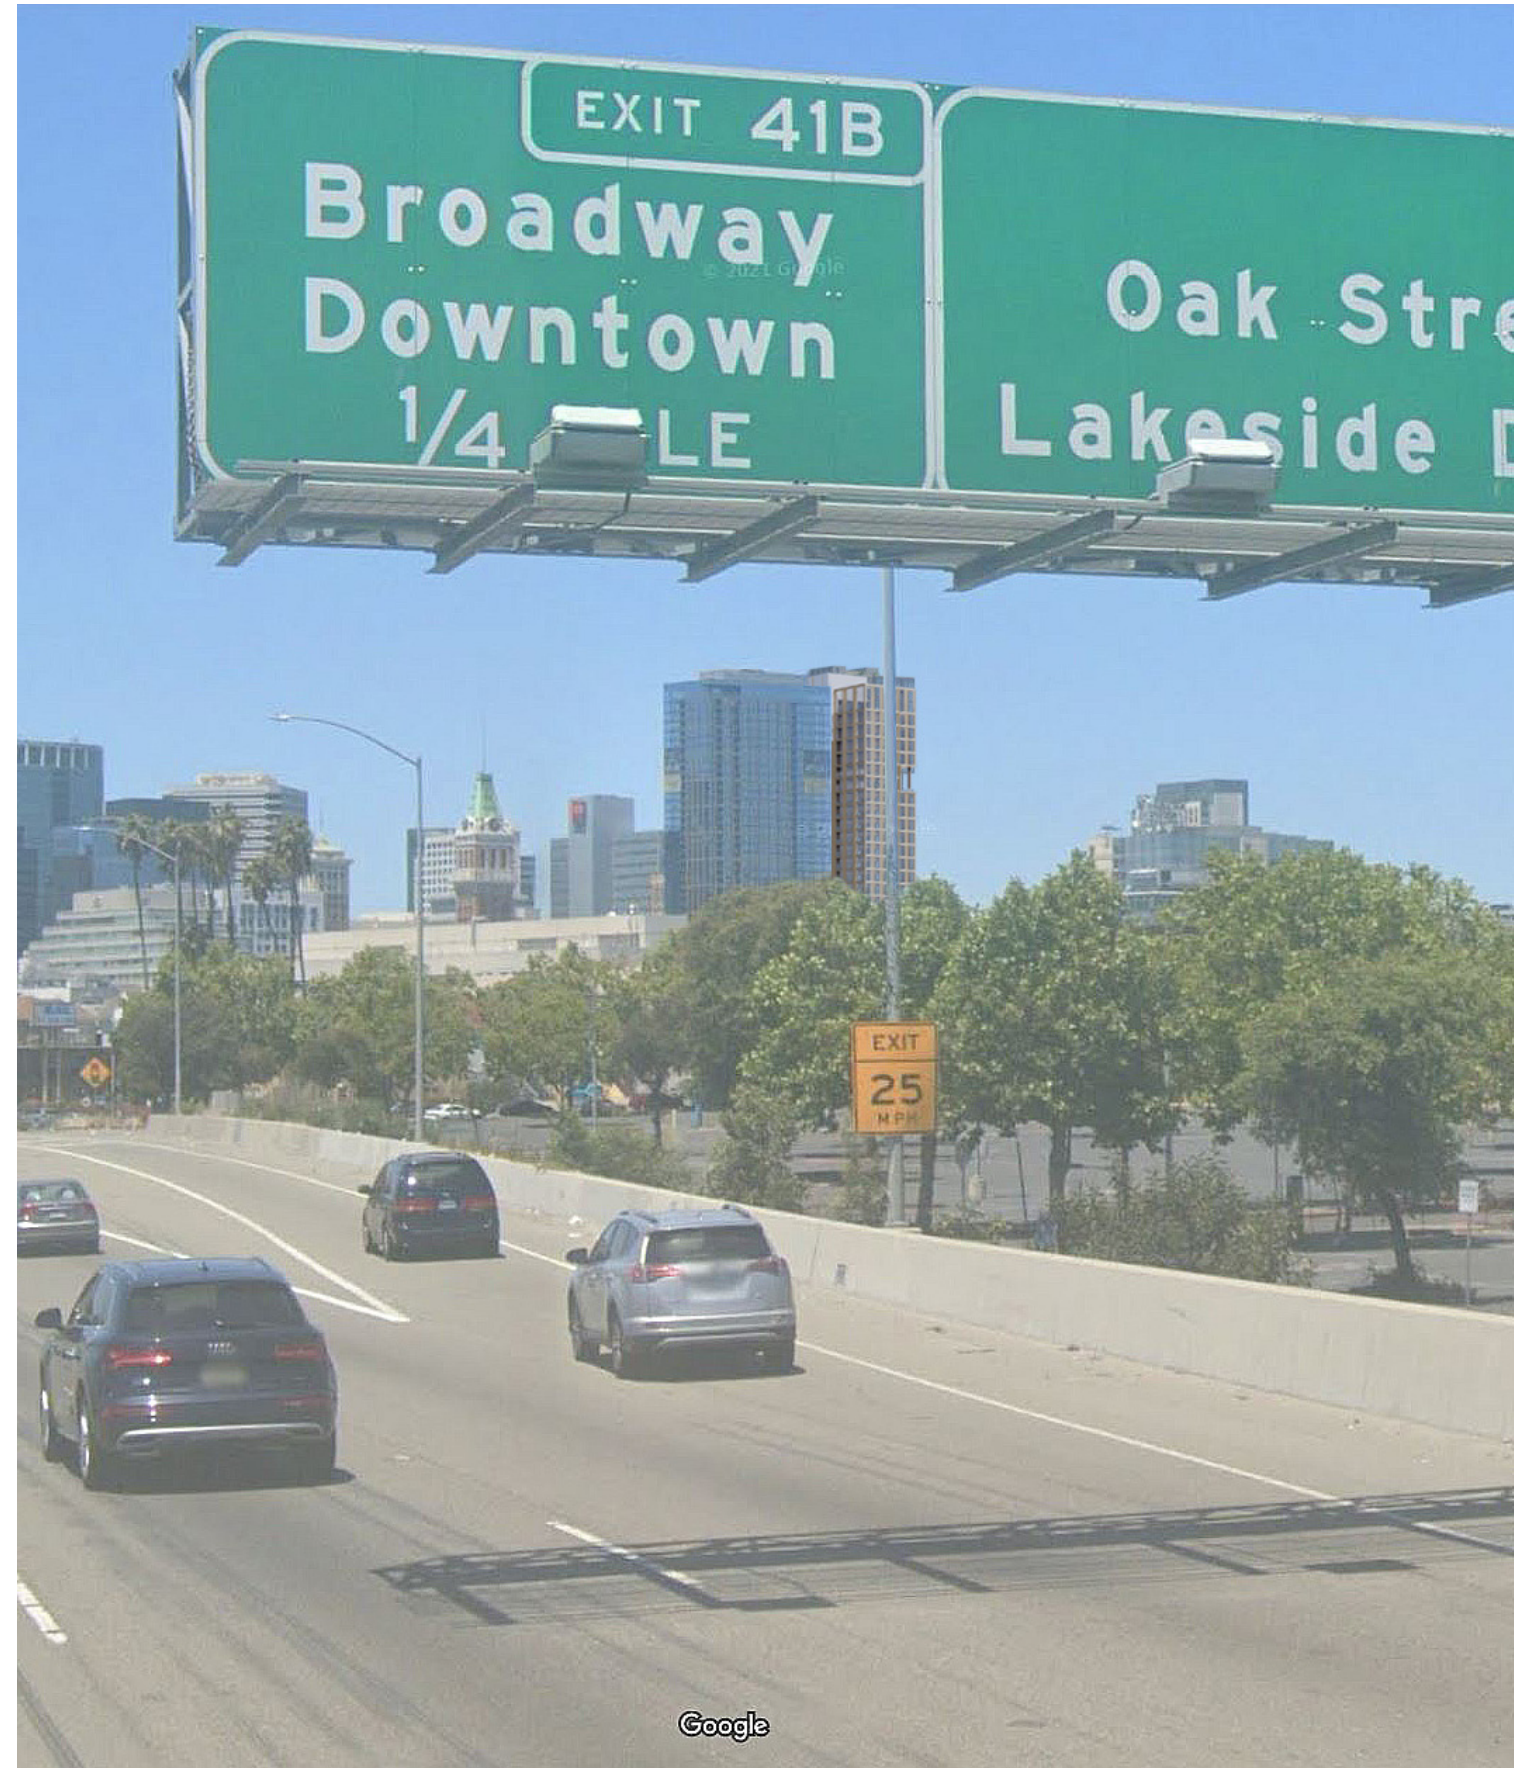


EXISTING




VIEW FROM I-980


PROPOSED

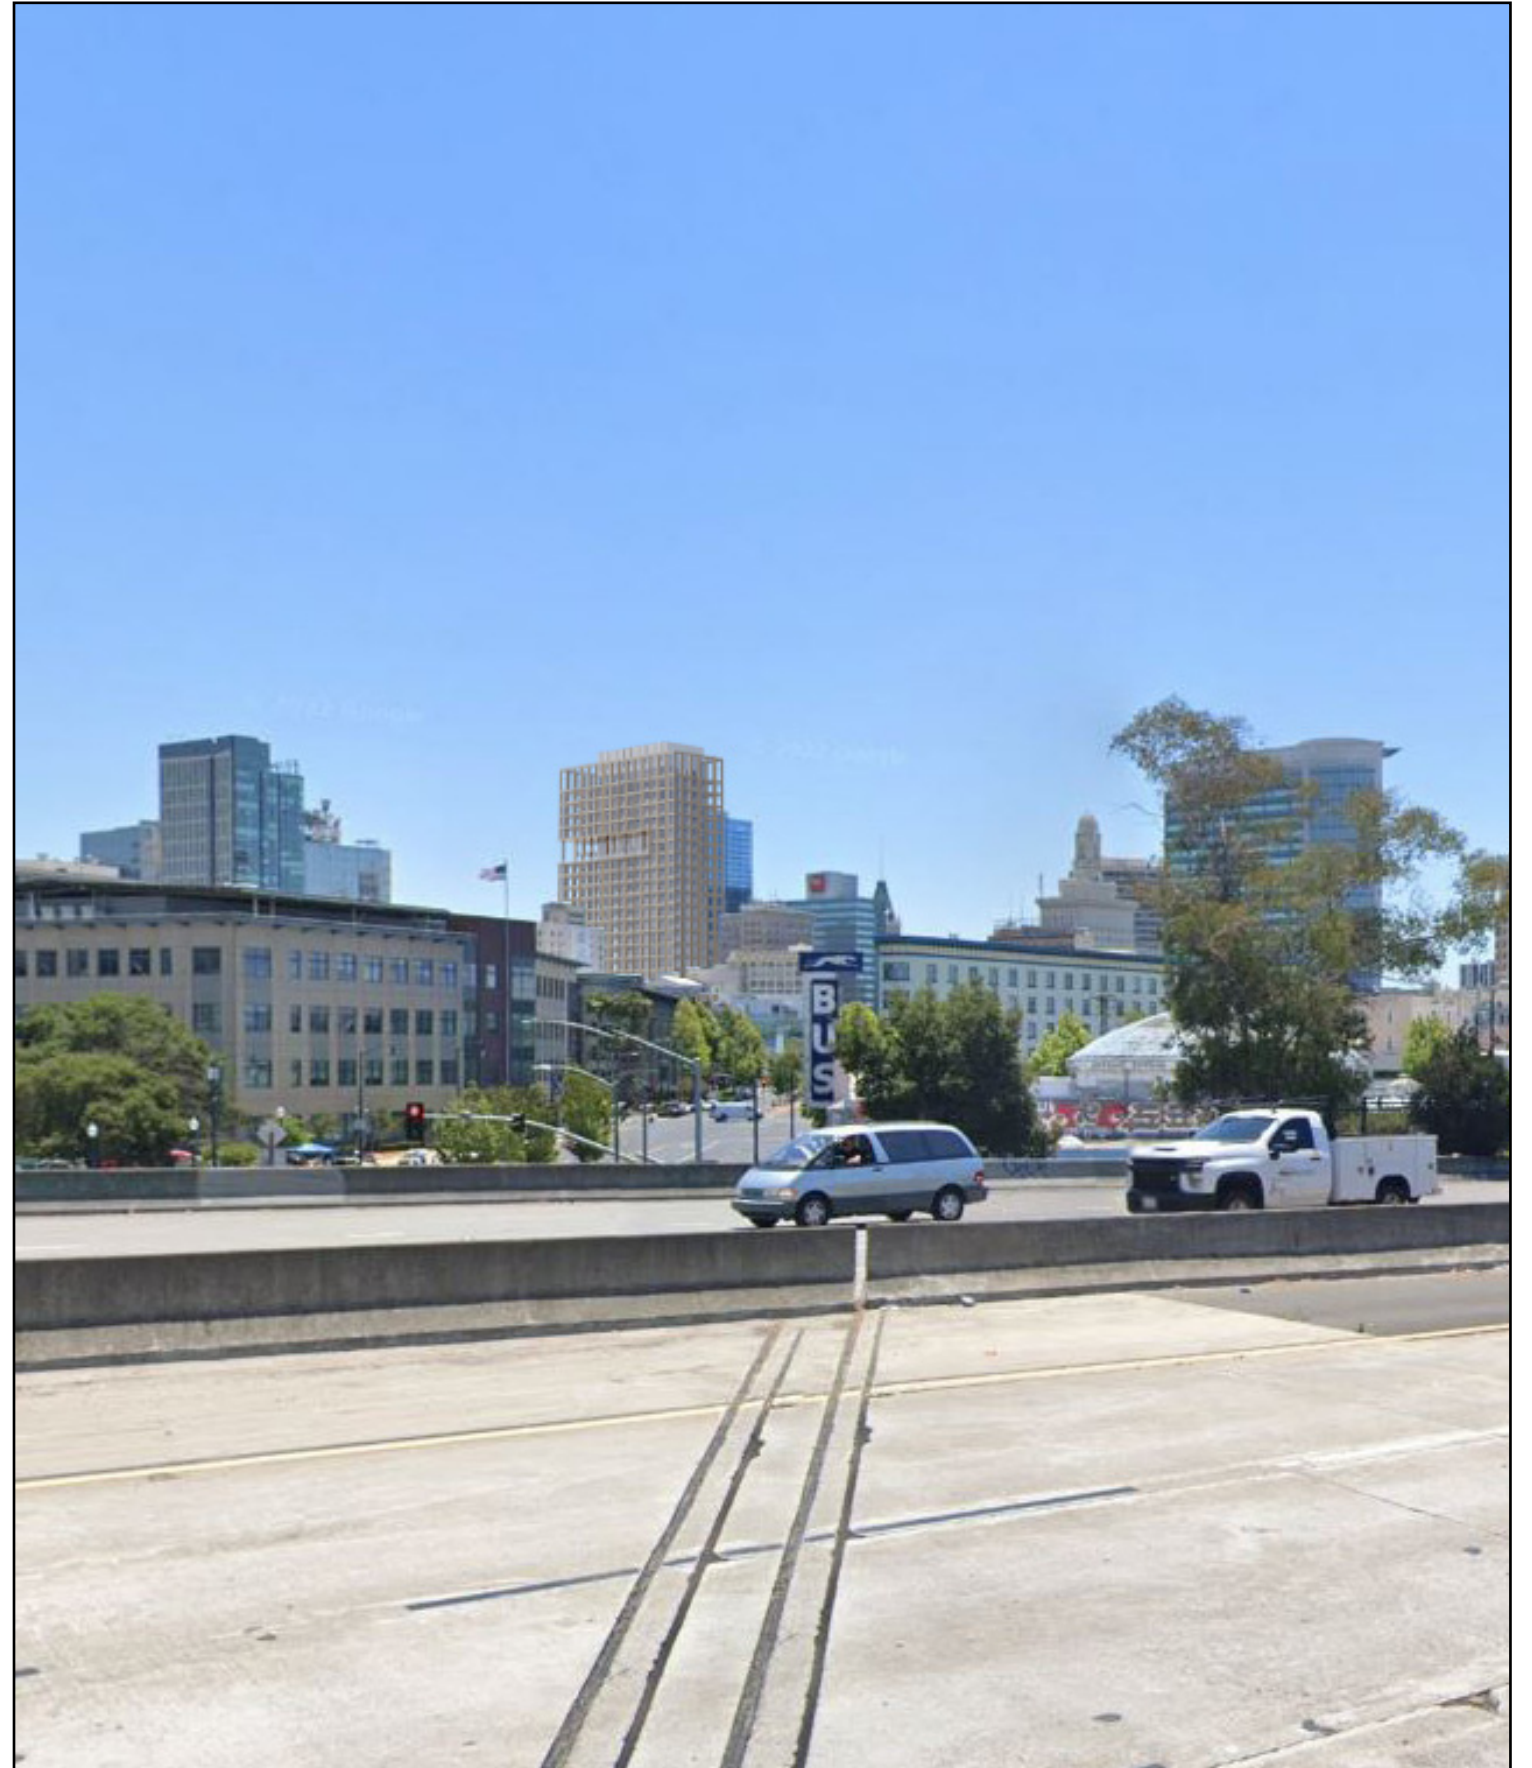

EXISTING

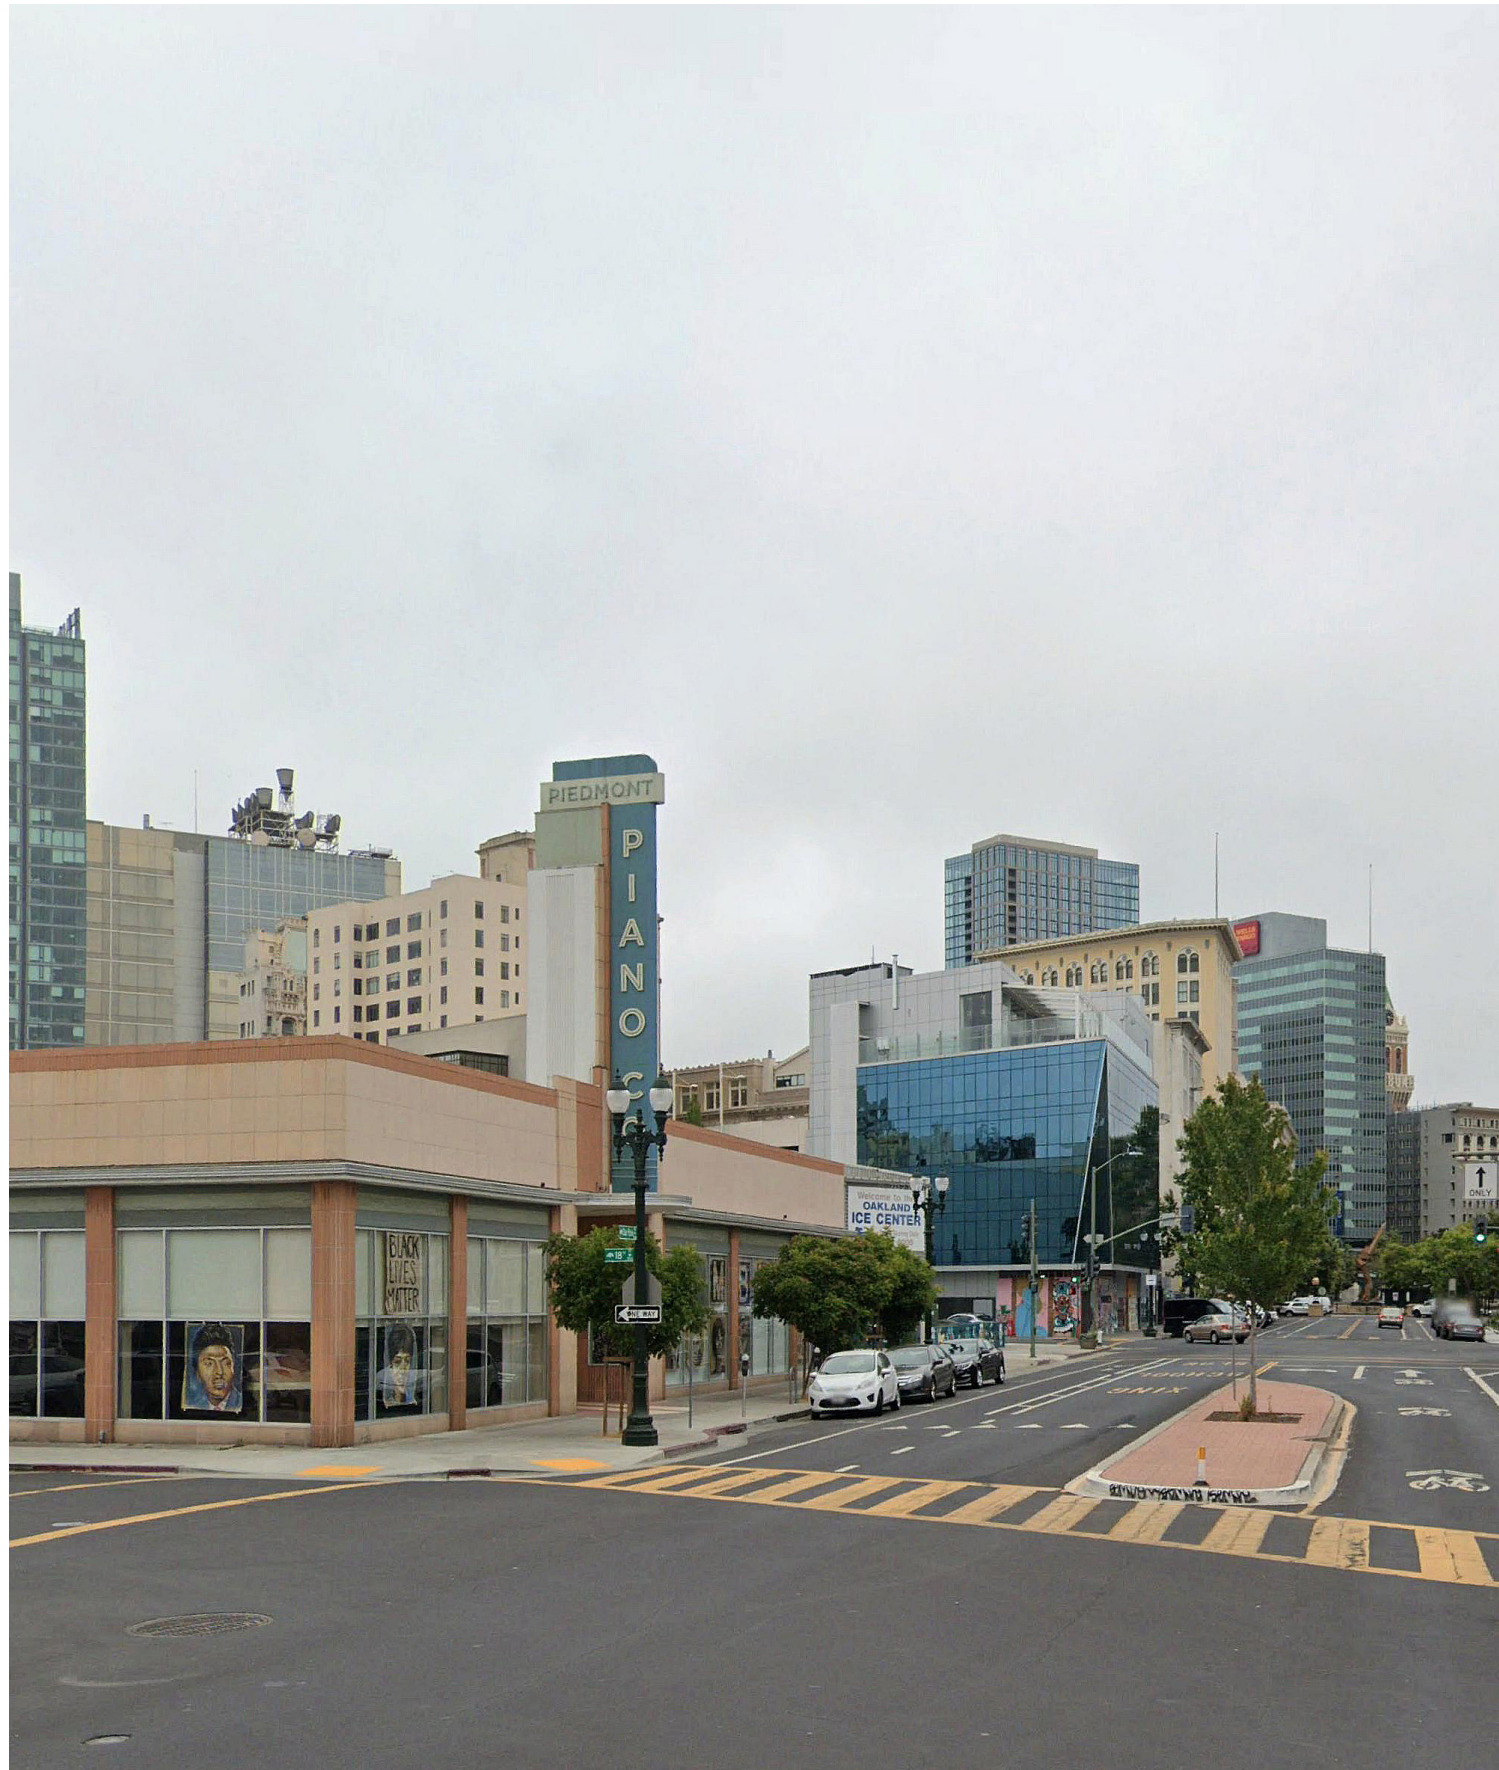

PROPOSED

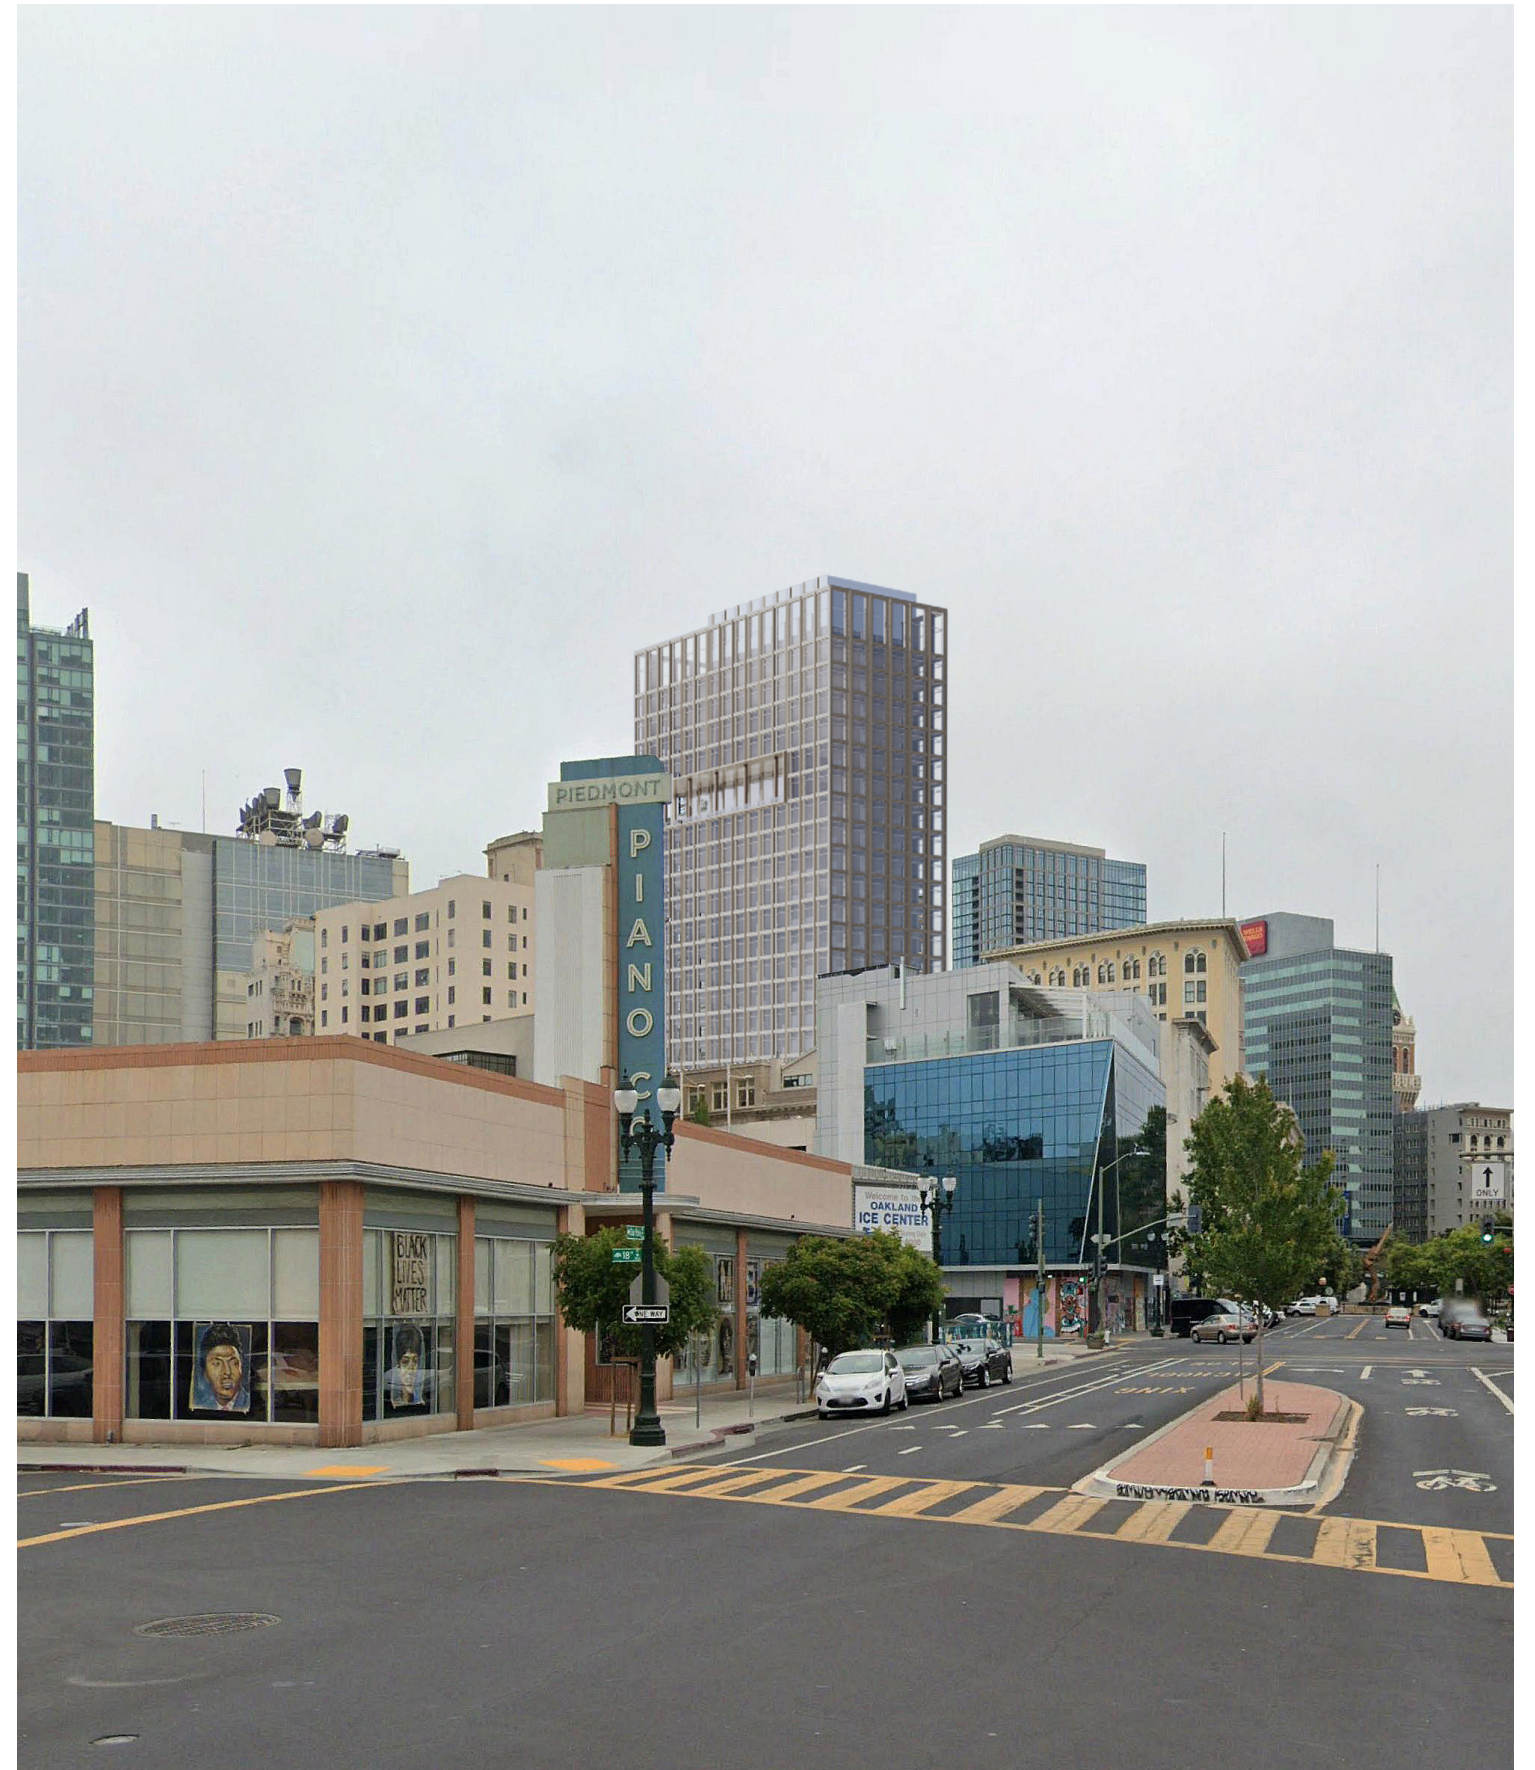

VIEW FROM SAN PABLO AVE

EXISTING




PROPOSED



VIEW FROM 18TH ST


PLANS AND SECTIONS

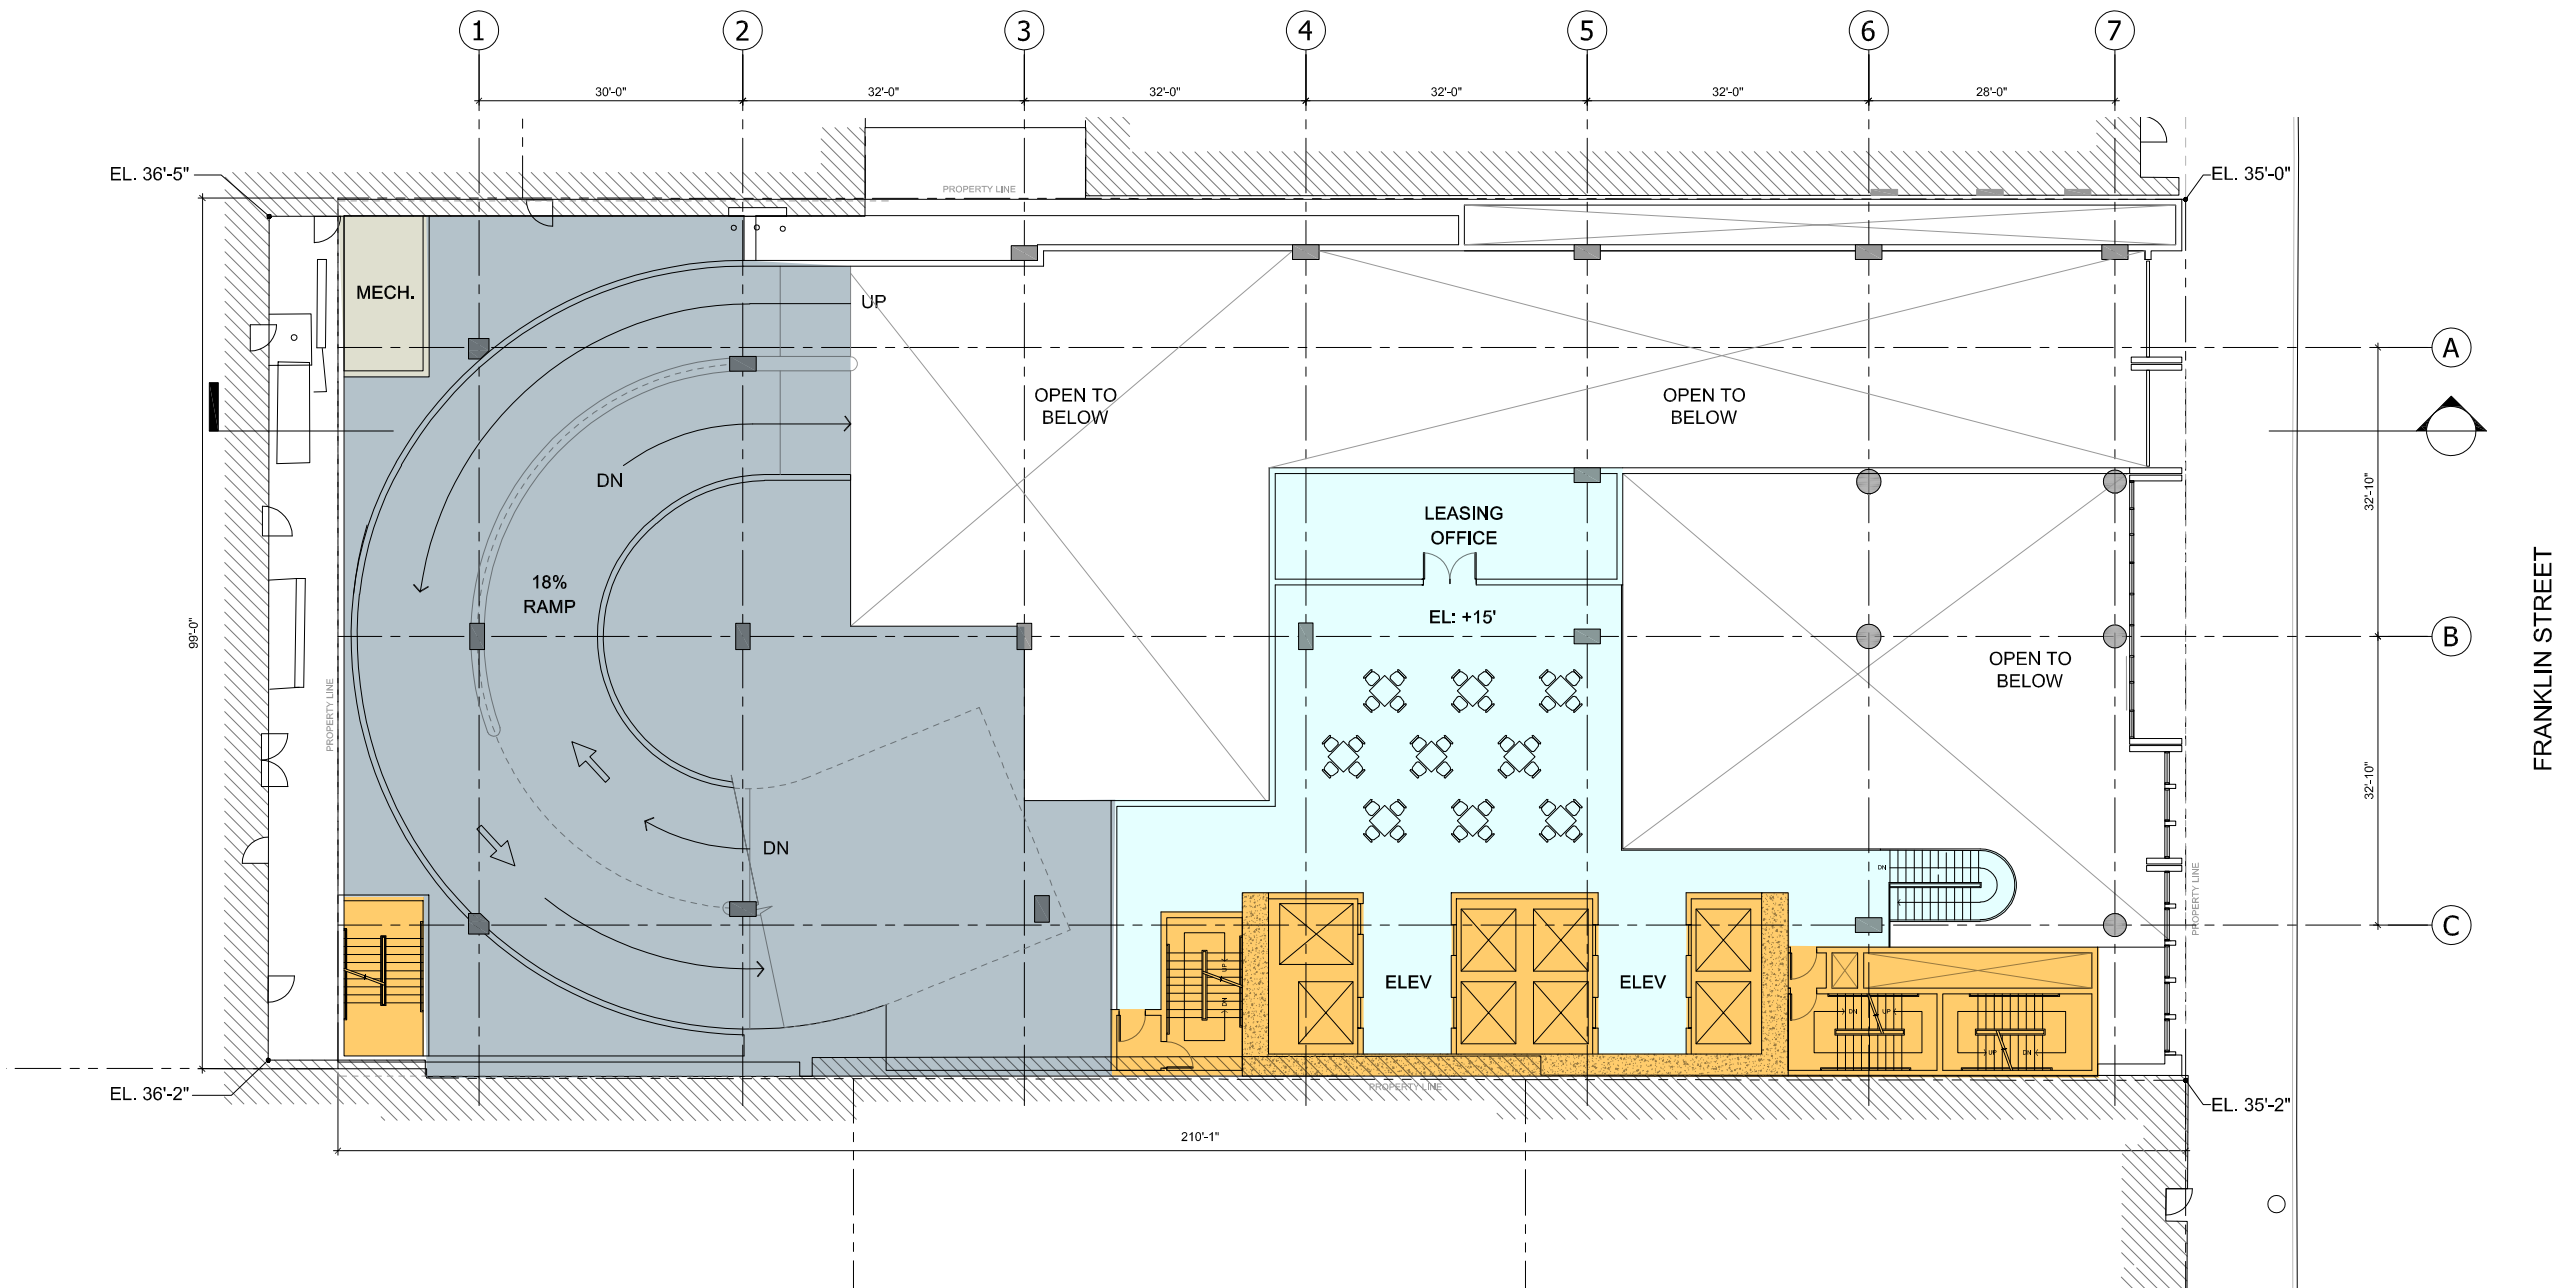

FLOOR PLAN (MEZZANINE)

SCALE: x" = 1'-0" 0' 5' 15' 30'




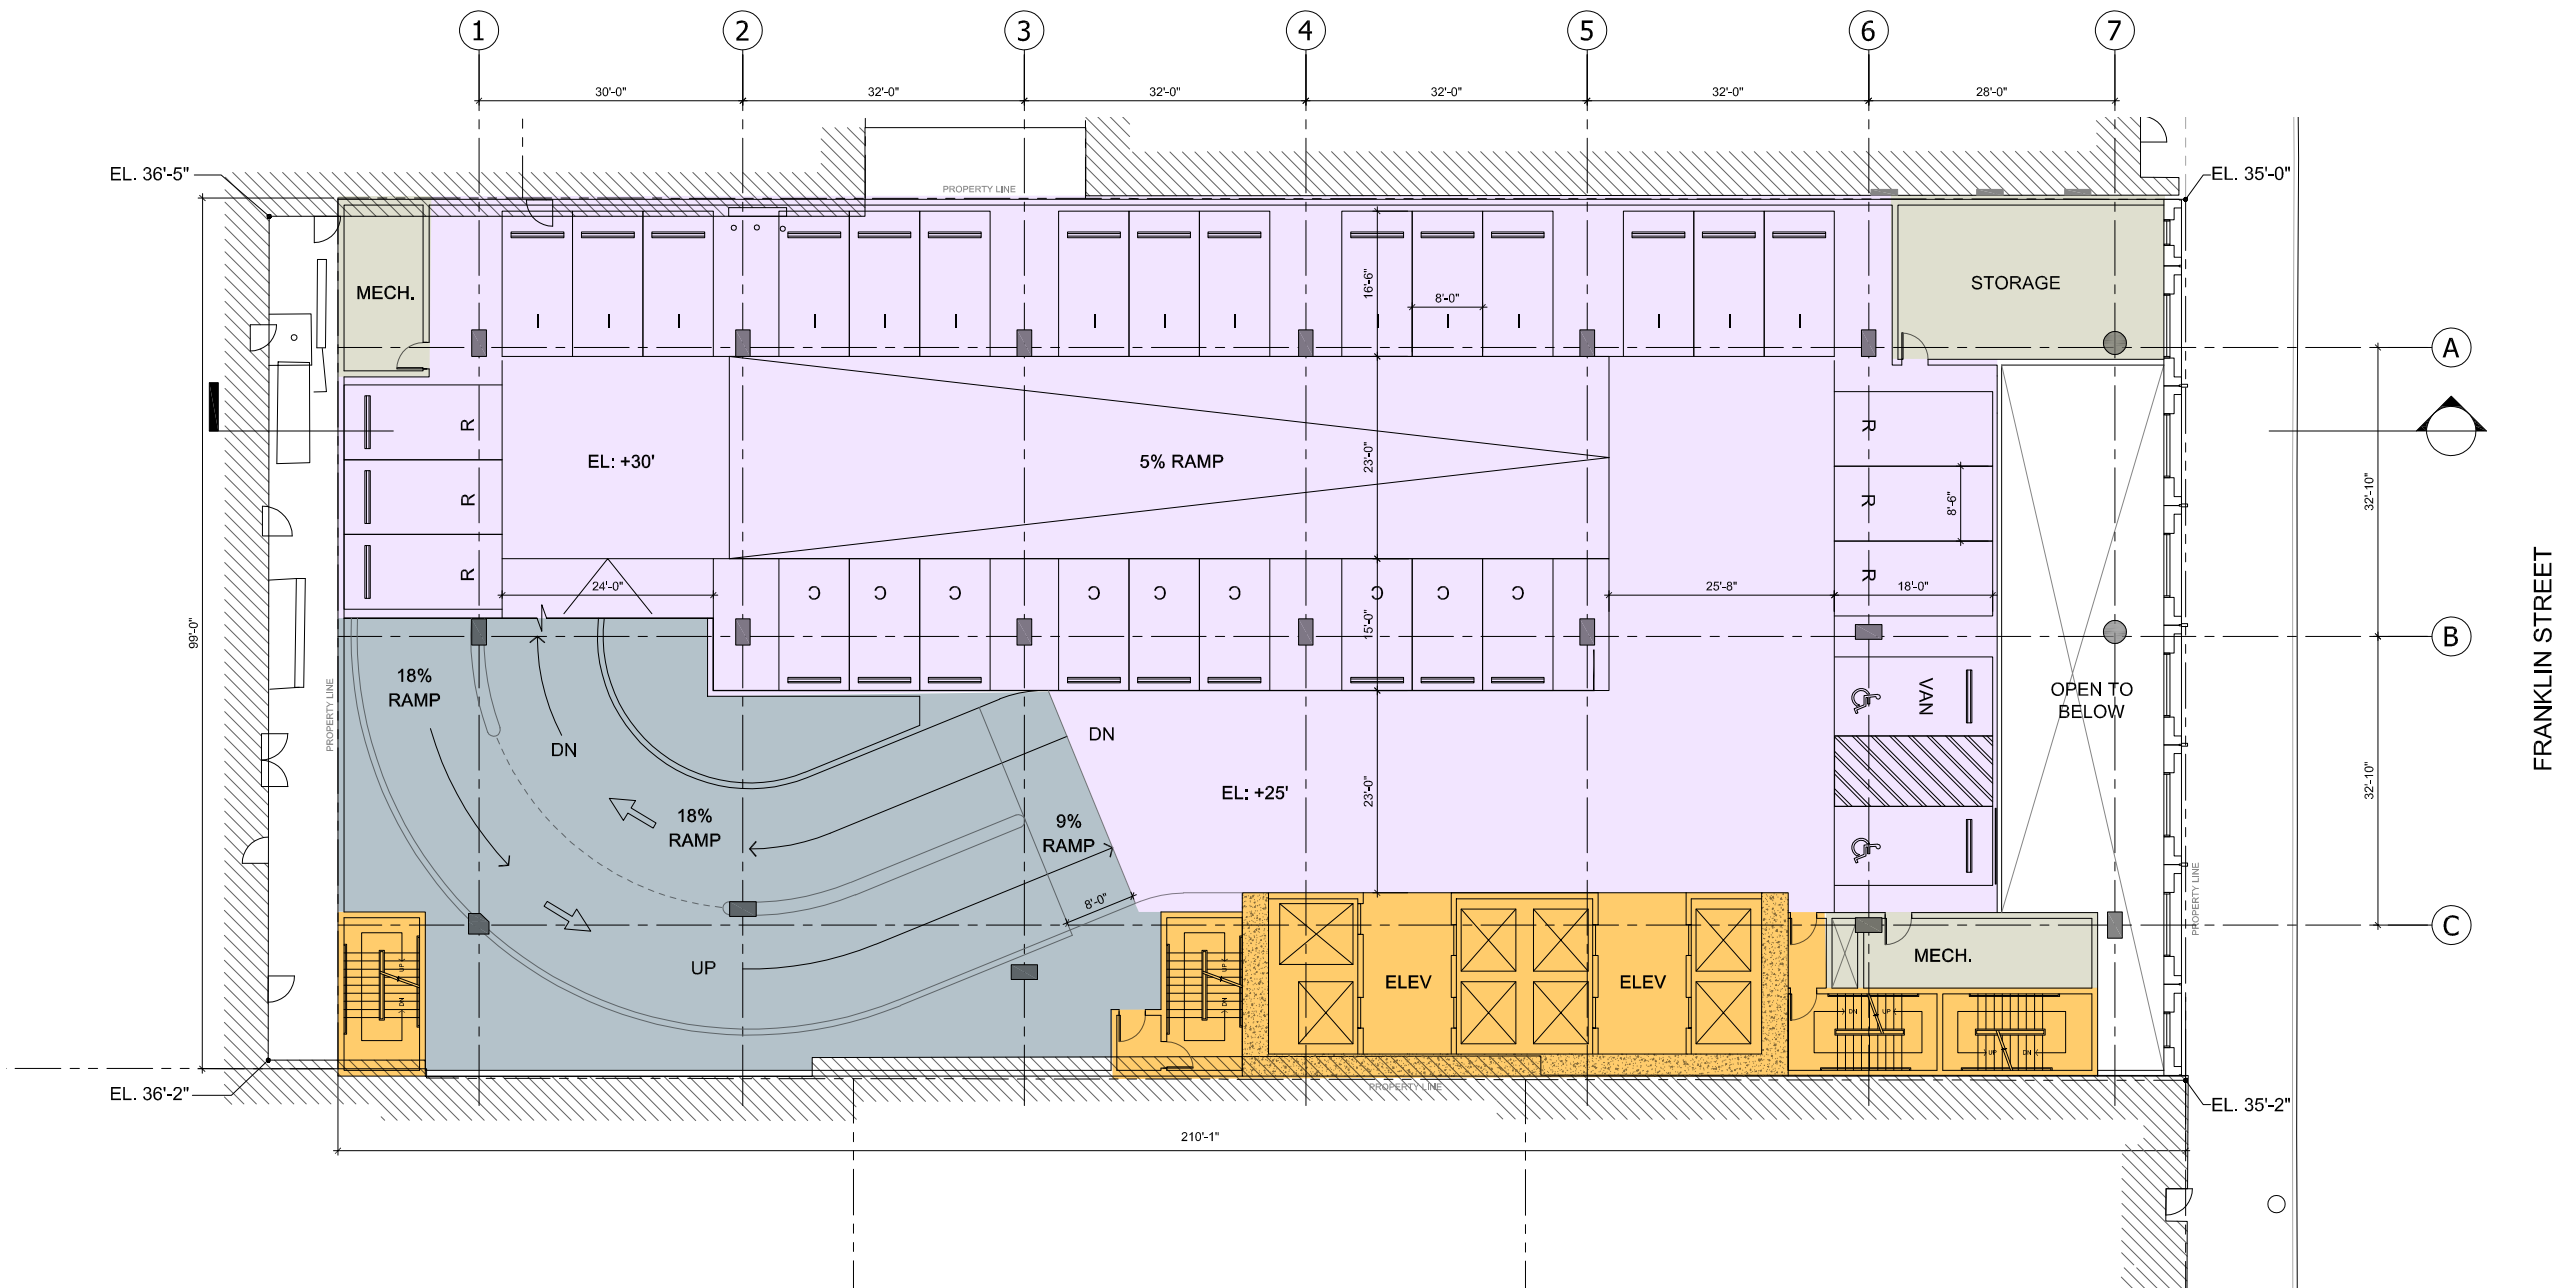

FLOOR PLAN (LEVEL 2)

SCALE: x" = 1'-0" 0' 5' 15' 30'




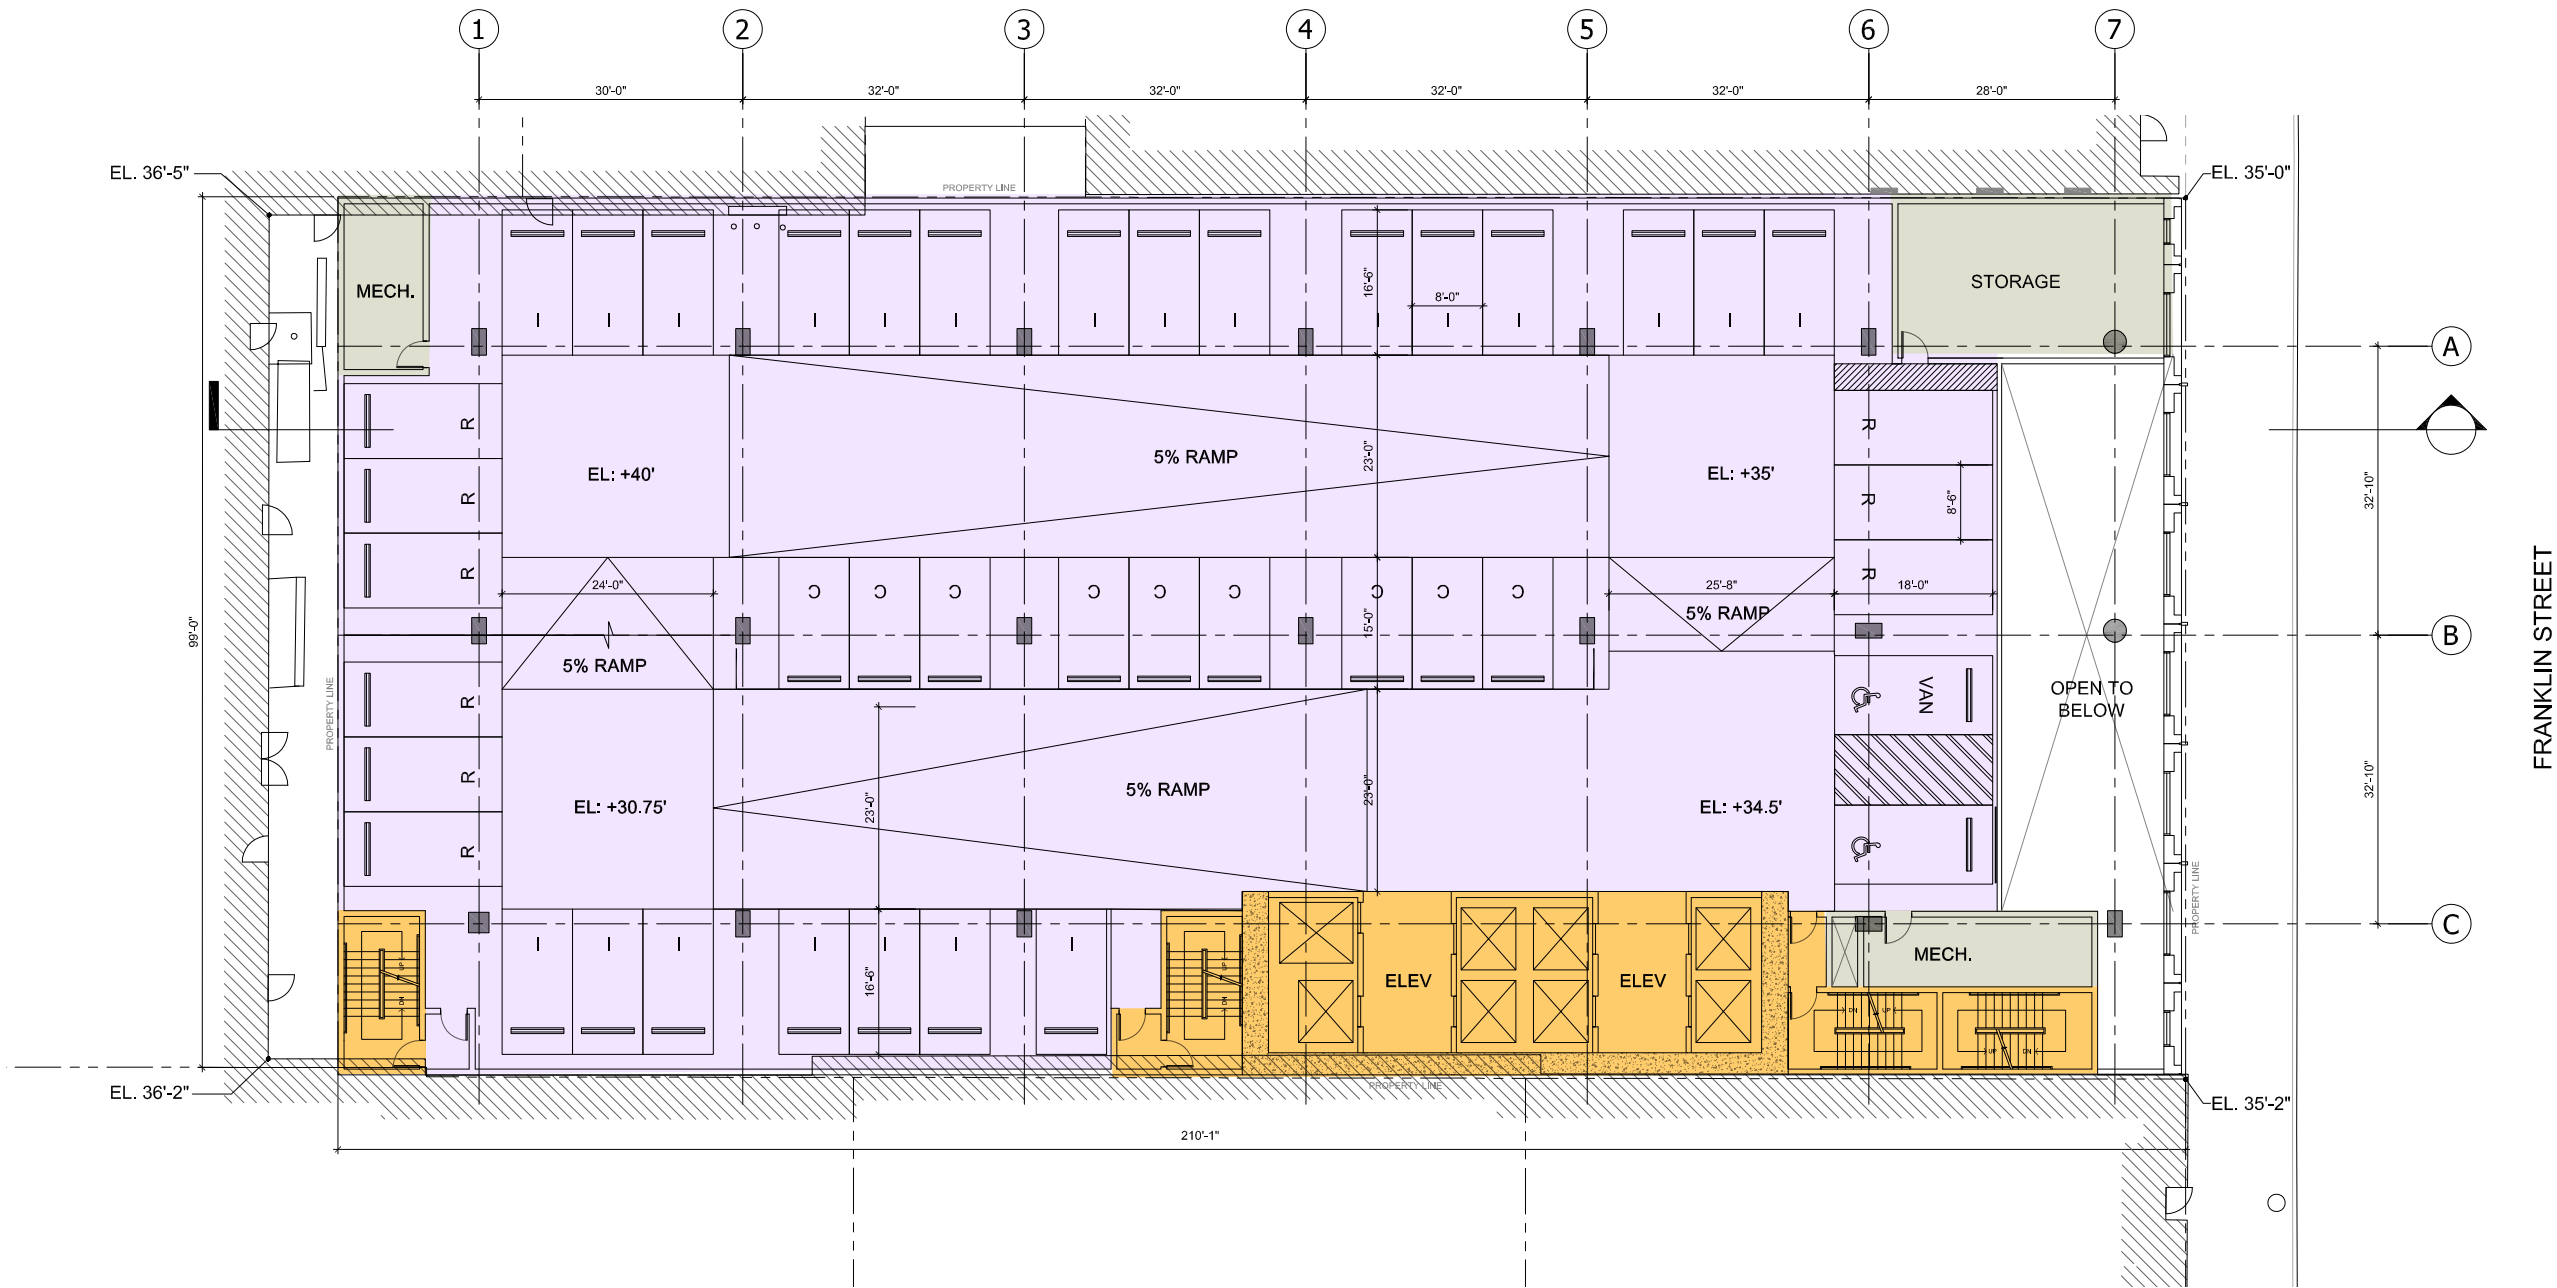

FLOOR PLAN (LEVEL 3)

SCALE: x" = 1'-0" 0' 5' 15' 30'



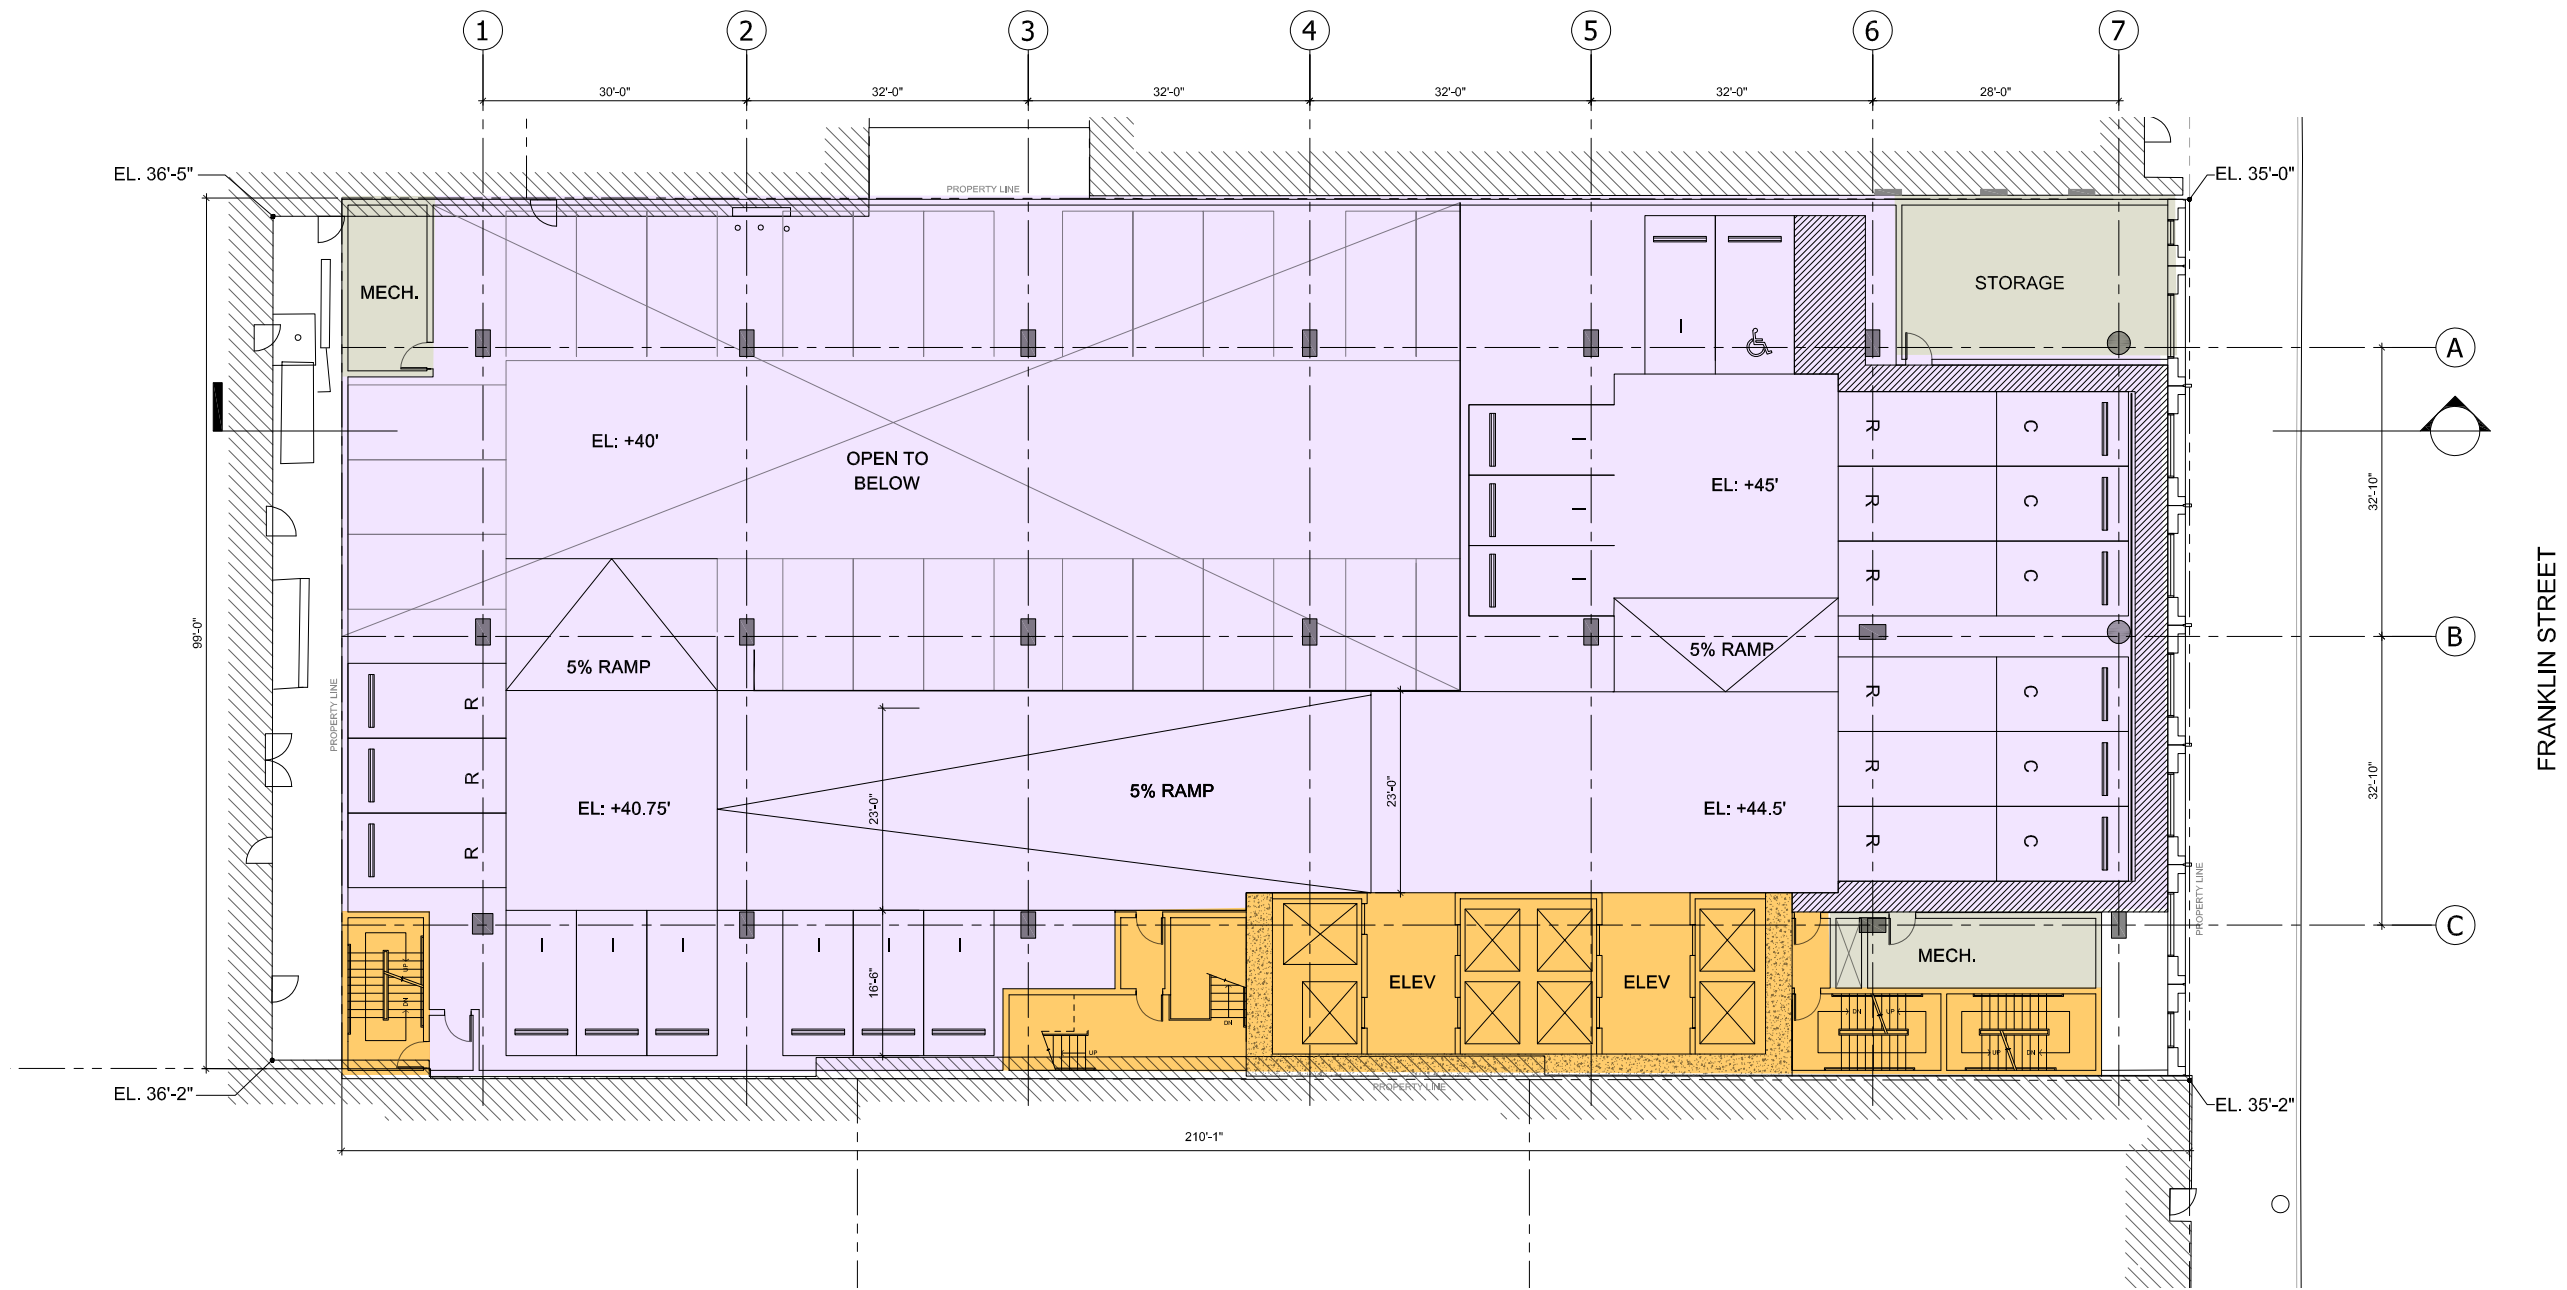

FLOOR PLAN (LEVEL 4)

SCALE: 1/8" = 1'-0" 0' 5' 15' 30'






FLOOR PLAN (LEVEL 5)

SCALE: 1/8" = 1'-0" 0' 5' 15' 30'




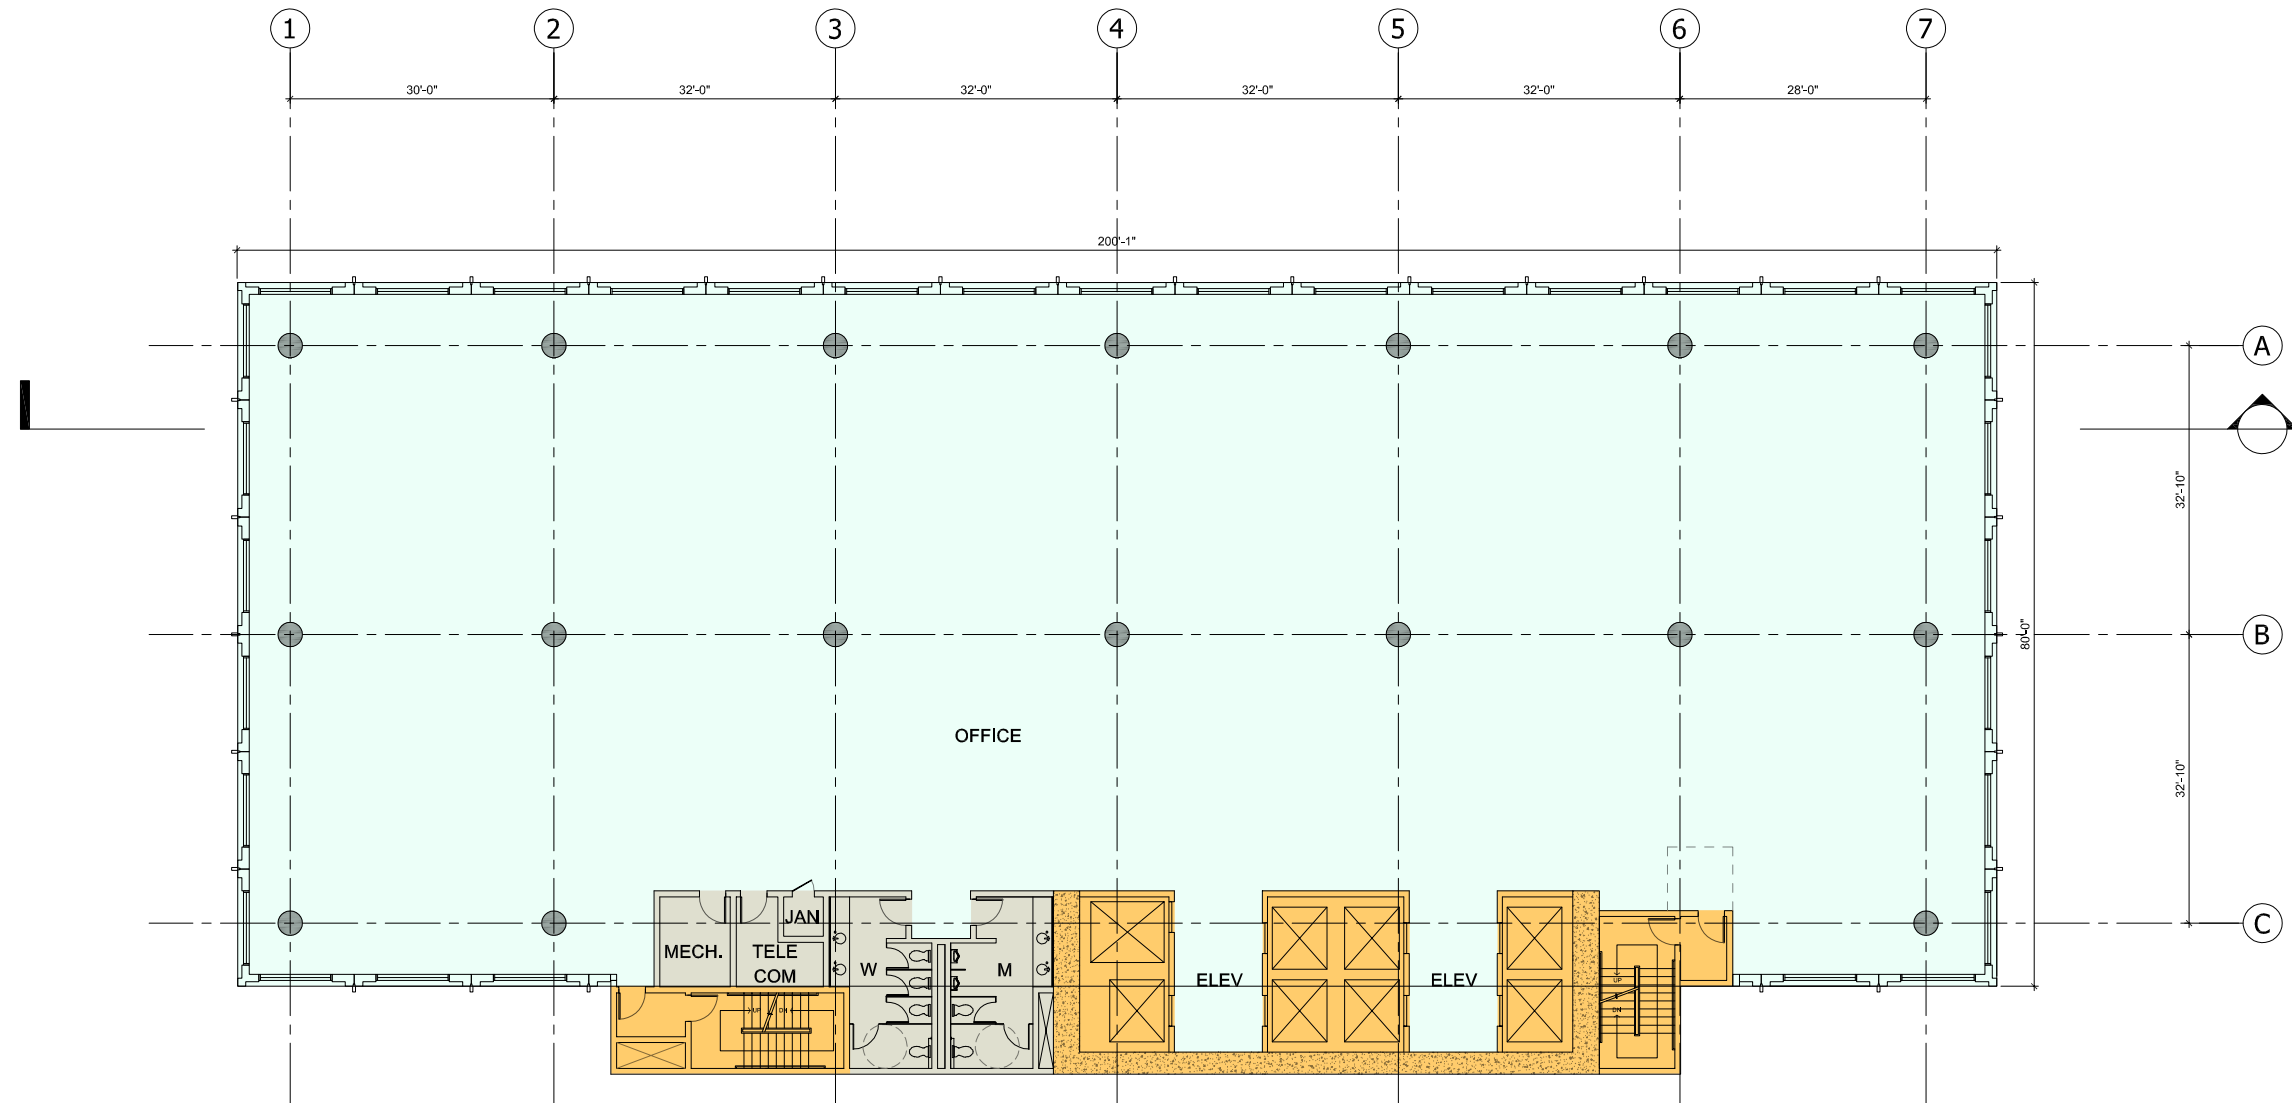

FLOOR PLAN (TYP. OFFICE FLOOR)

SCALE: 1/8" = 1'-0" 0' 5' 15' 30'



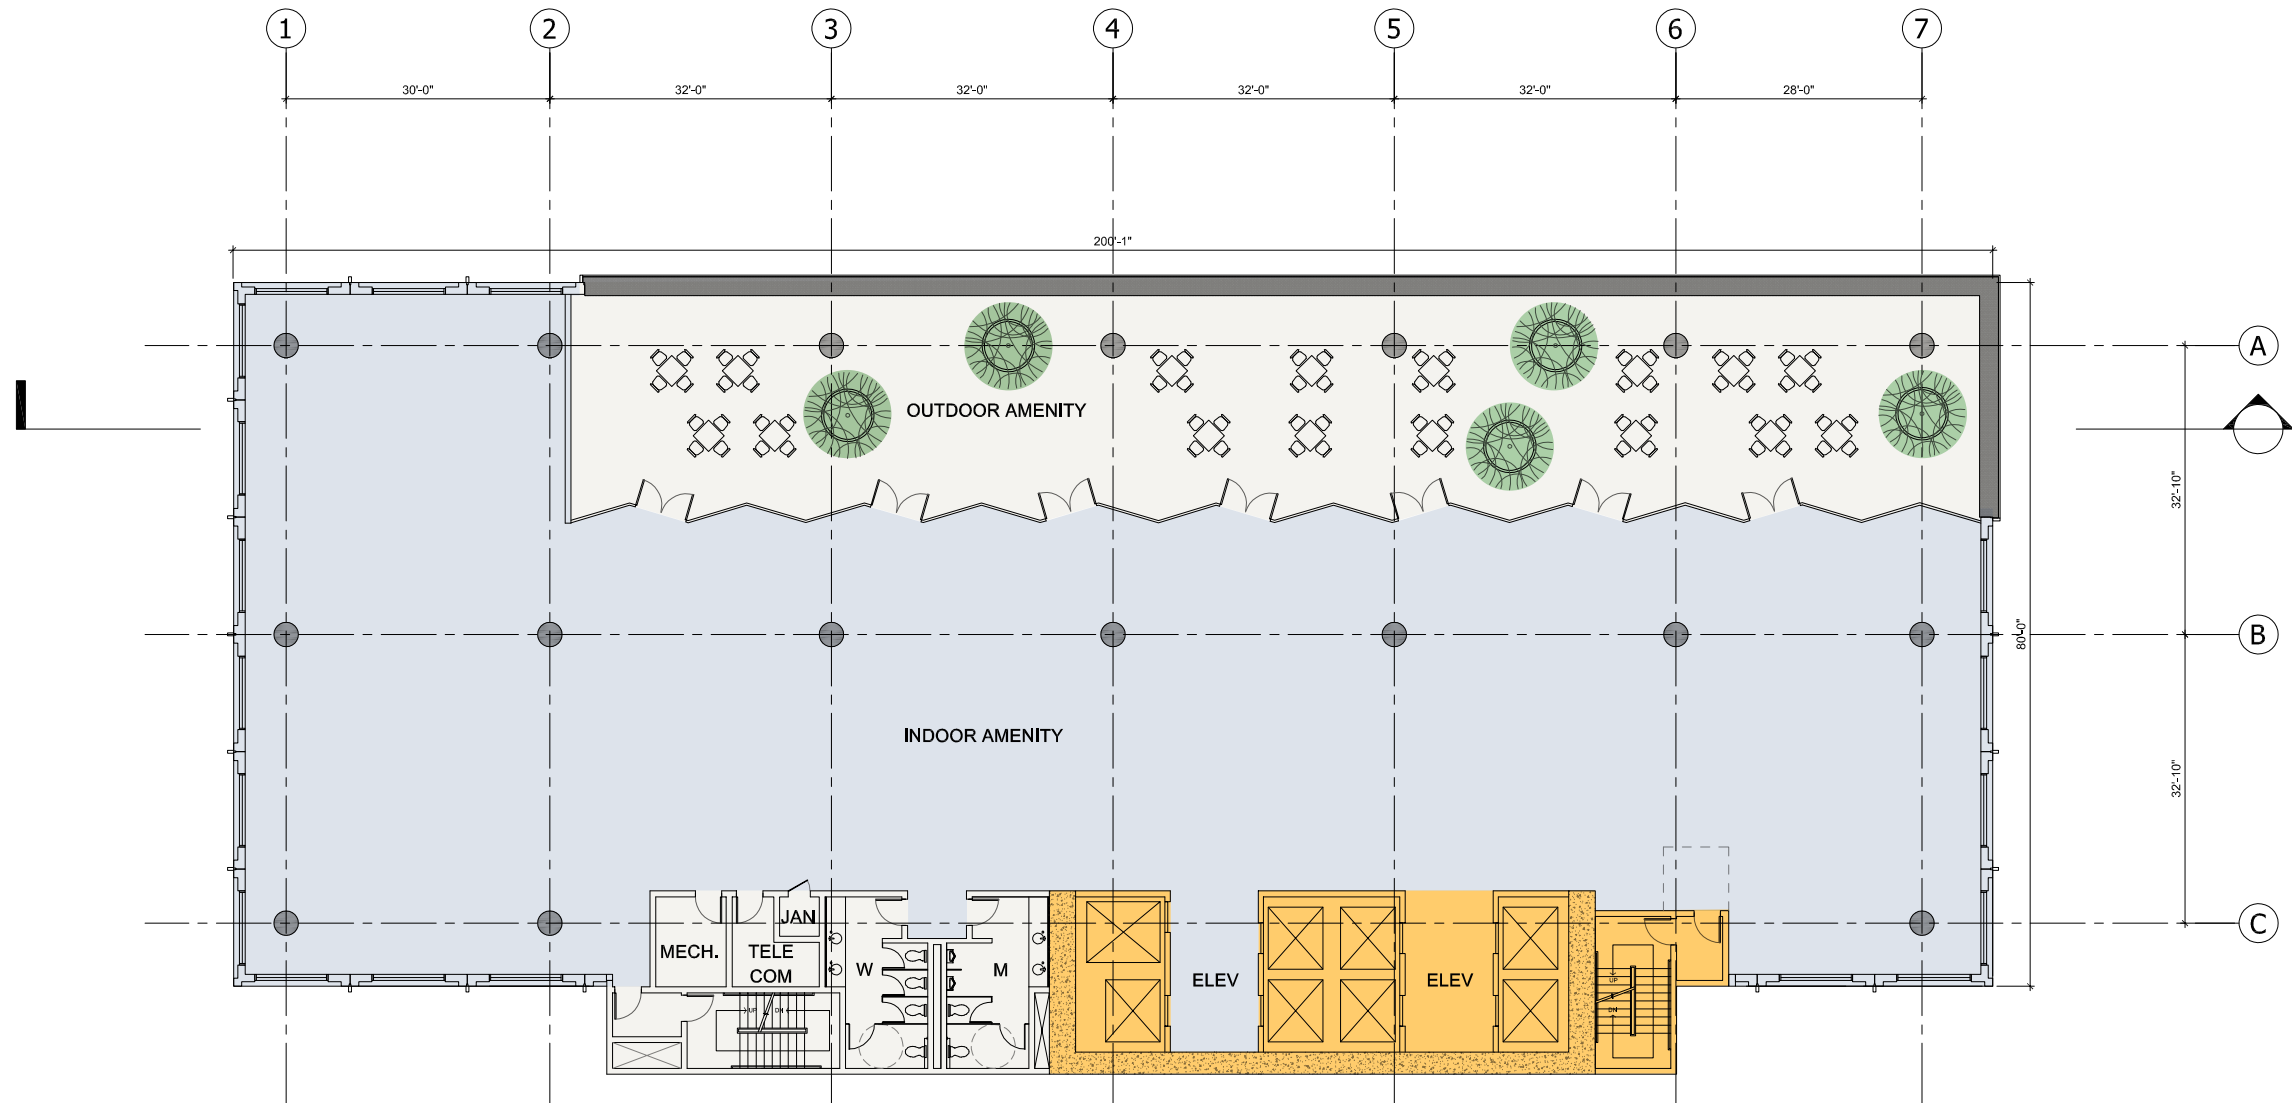

FLOOR PLAN (AMENITY)

SCALE: 1/4" = 1'-0" 0' 5' 15' 30'






FLOOR PLAN (ROOF)

SCALE: 1/4" = 1'-0" 0' 5' 15' 30'



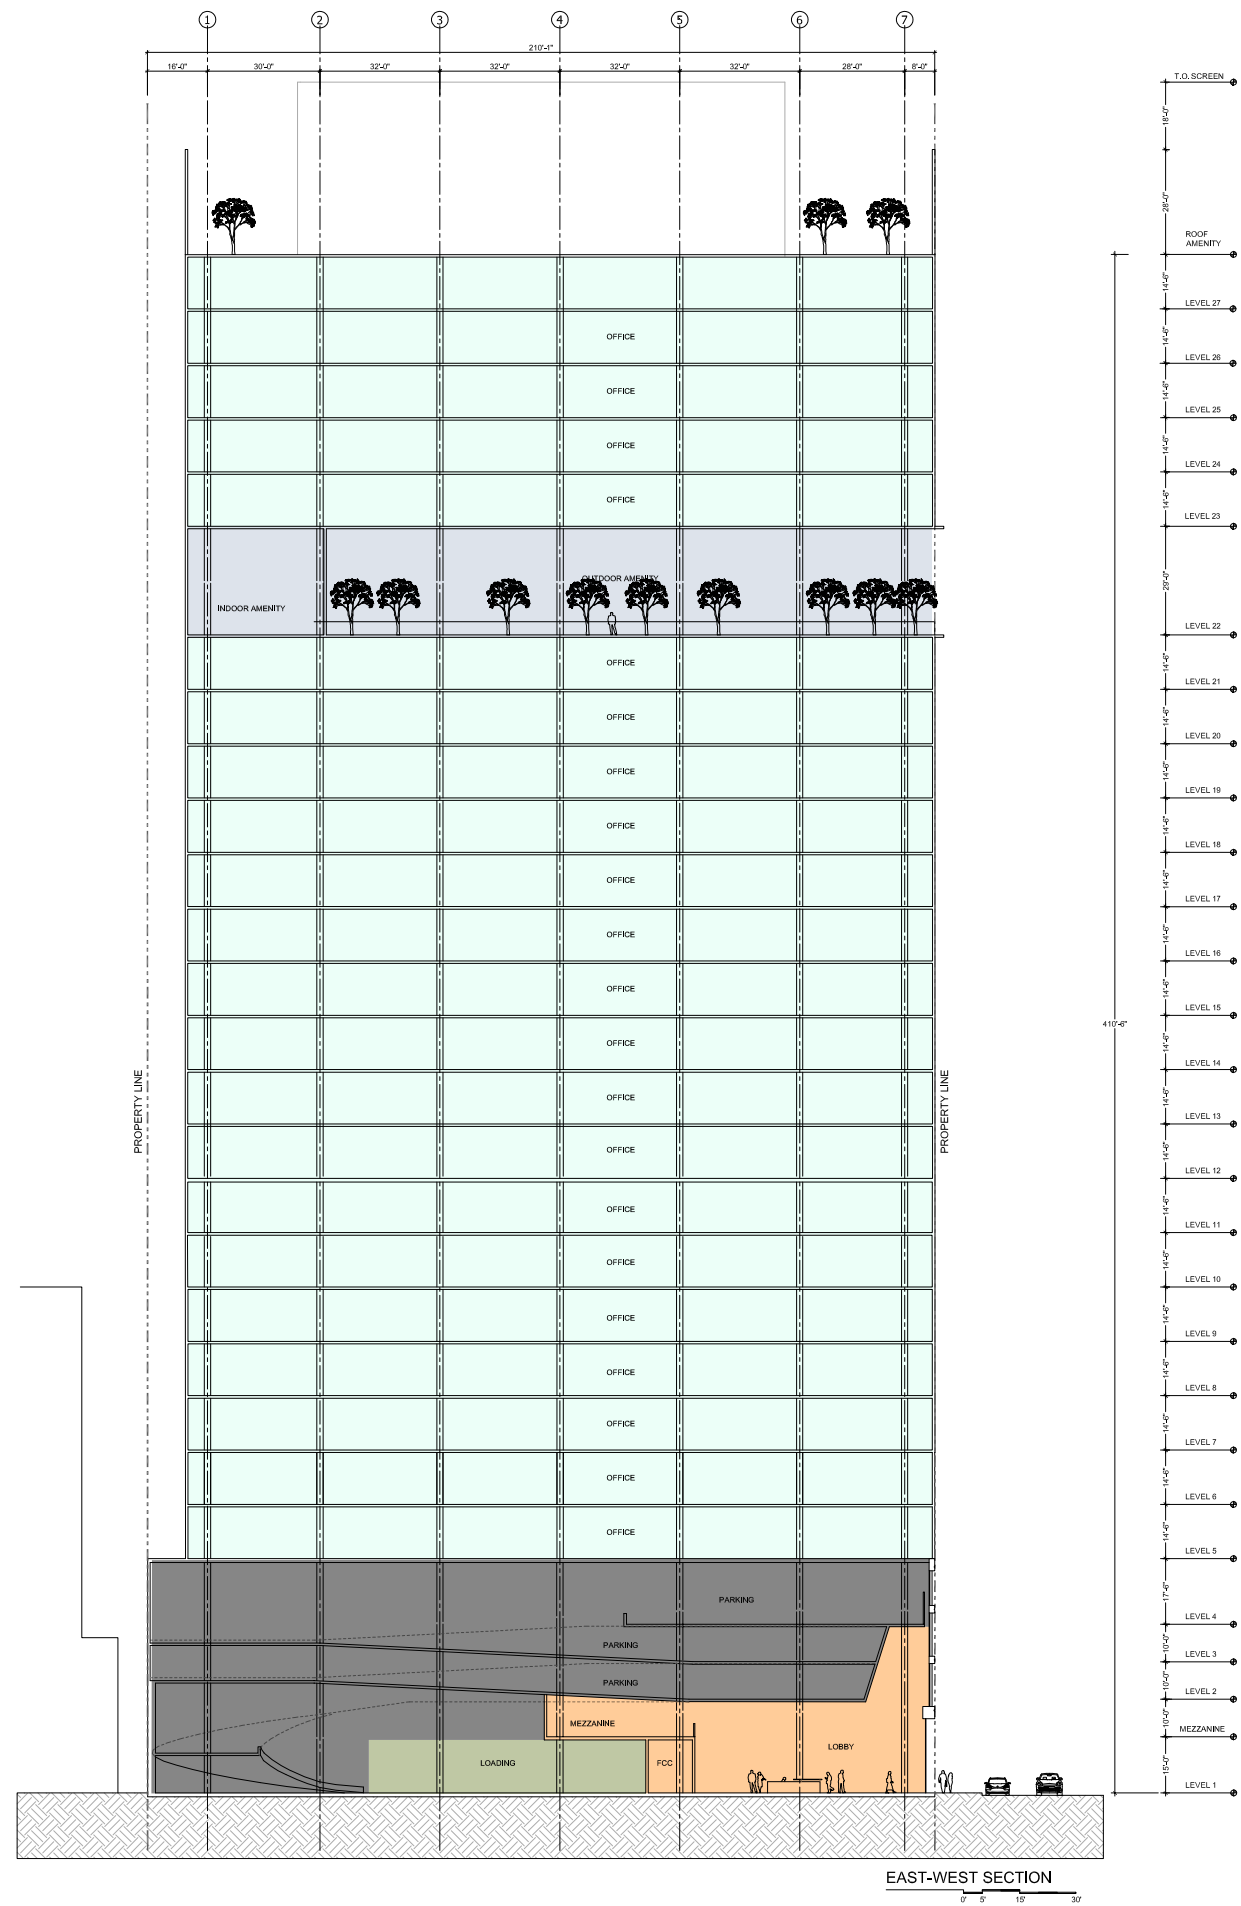

Mechanical screen
Amenity deck. Glass enclosure

T.O. ROOF
410.5' ABOVE GRADE

AMENITY
309" ABOVE GRADE

Punched window pre-cast system with brick facade and aluminum anodized windows and low-e glass. Brick color to be determined (Approximate color shown is proposed)



NORTH ELEVATION

Mechanical screen

Amenity deck. Glass enclosure

Pre-cast system with brick facade. Brick color to be determined (Approximate color shown is proposed)

Punched window pre-cast system with brick facade and aluminum anodized windows and low-e glass. Brick color to be determined (Approximate color shown is proposed)

T.O. ROOF
410.5' ABOVE GRADE

AMENITY
309' ABOVE GRADE



SOUTH ELEVATION

Mechanical screen
Amenity deck. Glass enclosure

Punched window pre-cast system with brick facade and aluminum anodized windows and low-e glass. Brick color to be determined (Approximate color shown is proposed)

T.O. ROOF
410.5' ABOVE GRADE

AMENITY
309' ABOVE GRADE



EAST ELEVATION


Mechanical screen
Amenity deck. Glass enclosure

T.O. ROOF
410.5' ABOVE GRADE


Punched window pre-cast system with brick facade and aluminum anodized windows and low-e glass. Brick color to be determined (Approximate color shown is proposed)



WEST ELEVATION

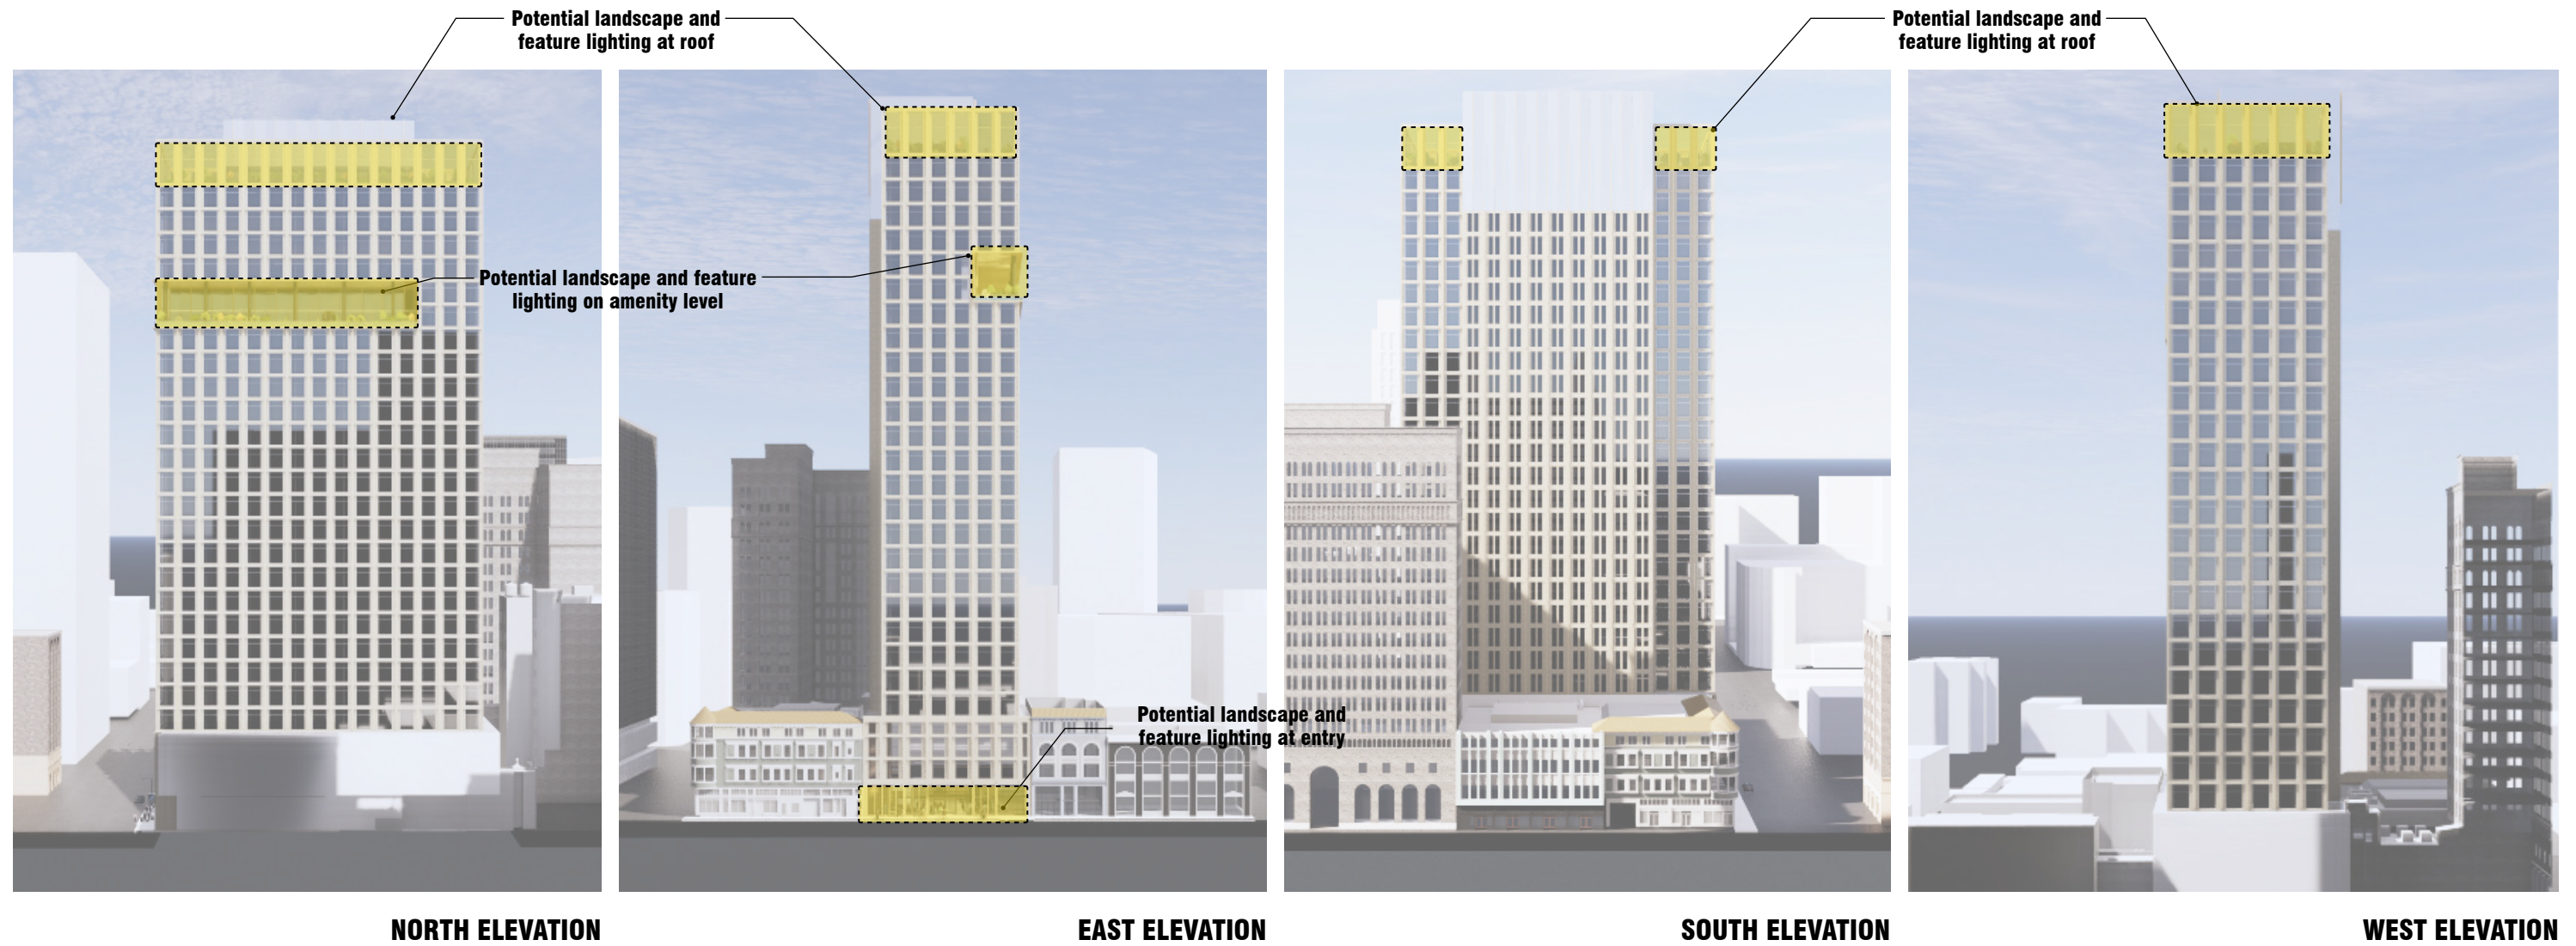

EXTERIOR LIGHTING LAYOUT

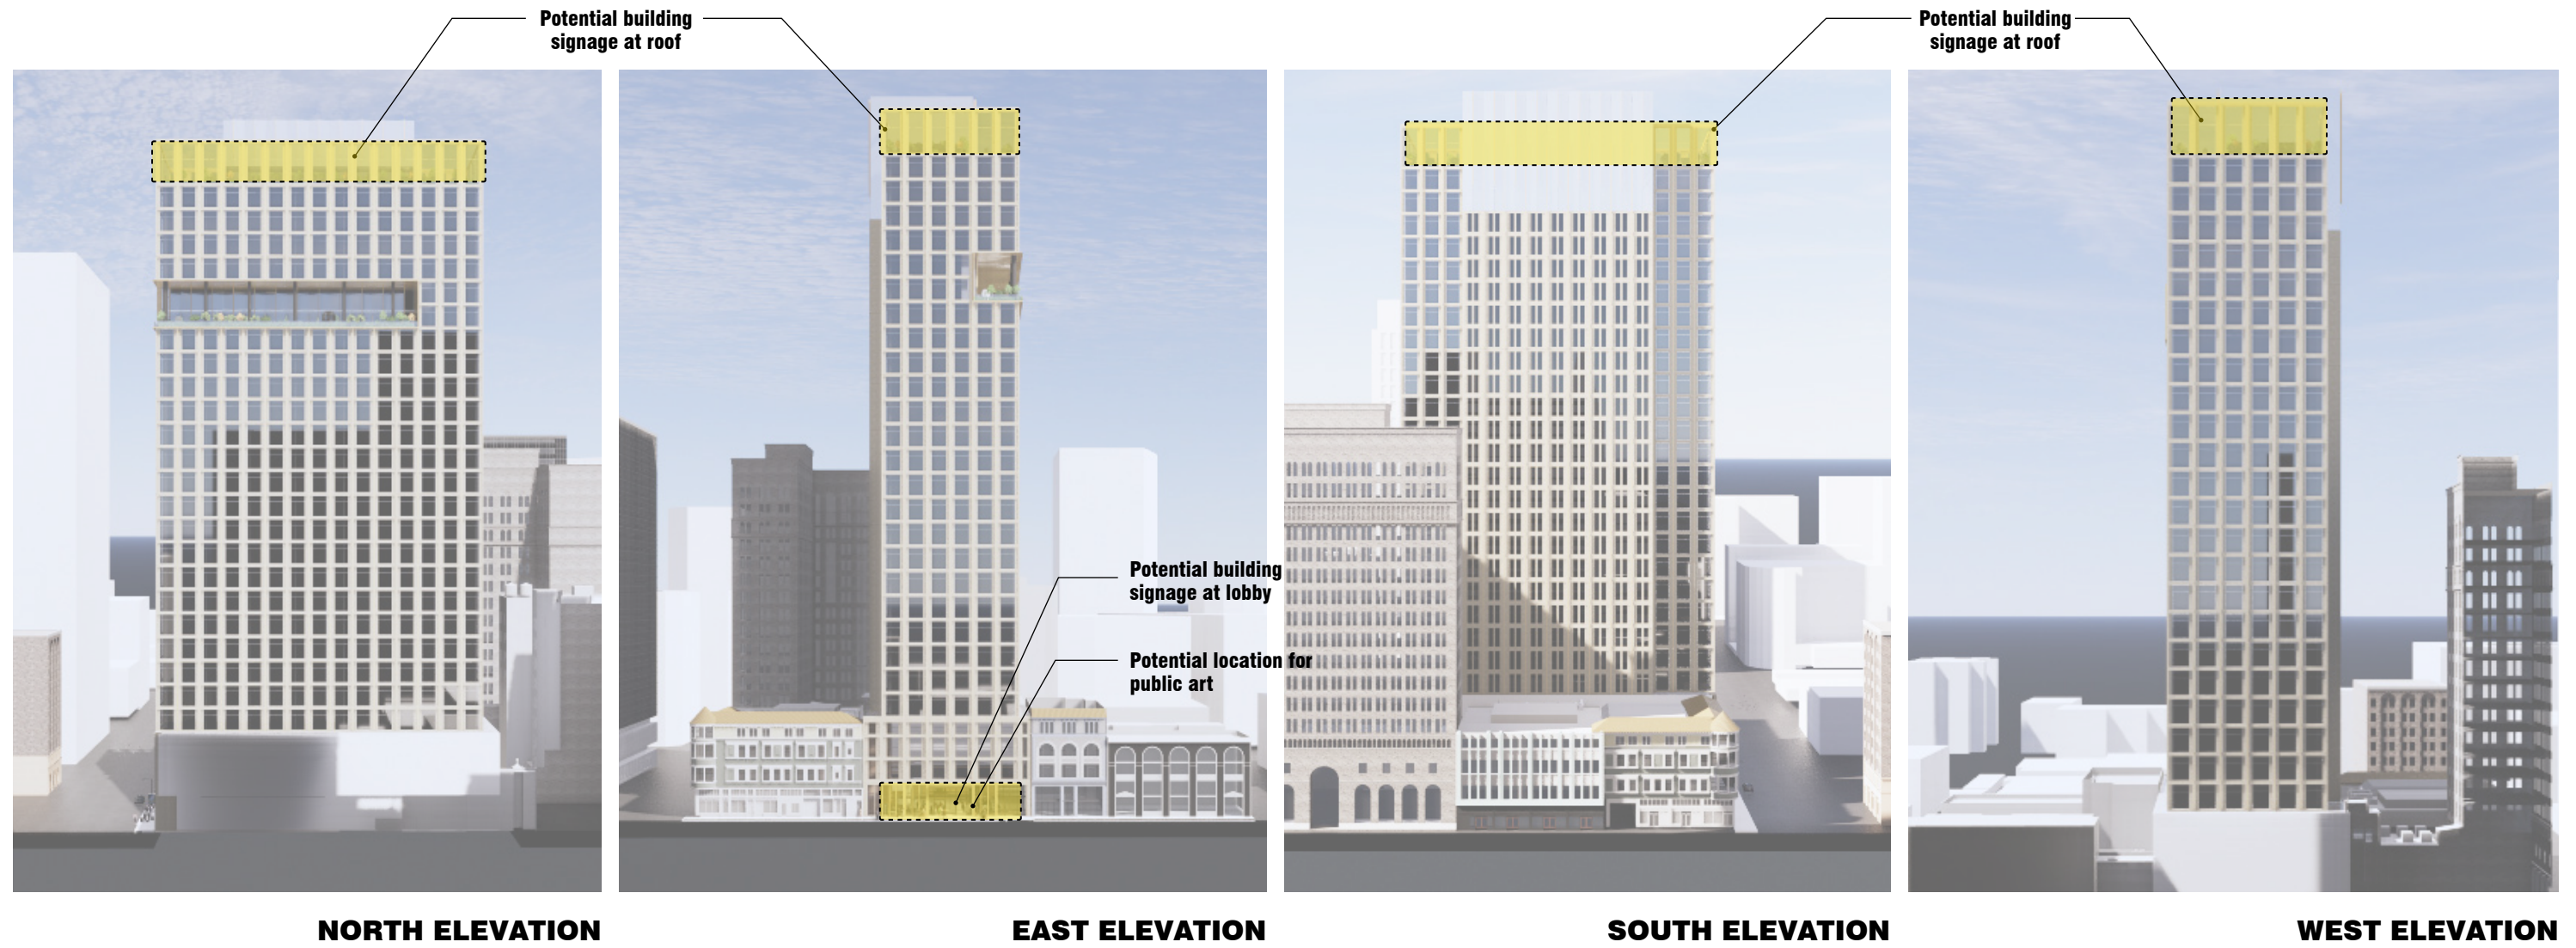

SIGNAGE

OFFICE BUILDING MATRIX

	LEVELS	FLOOR HEIGHT (FT.)	HEIGHT ABOVE GRADE (FT.)	GROSS HORIZONTAL AREA (1)	EXCLUDED AREA (1)	FLOOR AREA (1)
AMENITIES	ROOF DECK	-	410.5	2,195	-	2,195
OFFICES	27	14.5	396	17,080	-	17,080
	26	14.5	381.5	17,080	-	17,080
	25	14.5	367	17,080	-	17,080
	24	14.5	352.5	17,080	-	17,080
	23	14.5	338	17,080	-	17,080
AMENITIES	22	29	309	17,080	-	17,080
OFFICES	21	14.5	294.5	17,080	-	17,080
	20	14.5	280	17,080	-	17,080
	19	14.5	265.5	17,080	-	17,080
	18	14.5	251	17,080	-	17,080
	17	14.5	236.5	17,080	-	17,080
	16	14.5	222	17,080	-	17,080
	15	14.5	207.5	17,080	-	17,080
	14	14.5	193	17,080	-	17,080
	13	14.5	178.5	17,080	-	17,080
	12	14.5	164	17,080	-	17,080
	11	14.5	149.5	17,080	-	17,080
	10	14.5	135	17,080	-	17,080
	9	14.5	120.5	17,080	-	17,080
	8	14.5	106	17,080	-	17,080
	7	14.5	91.5	17,080	-	17,080
6	14.5	77	17,080	-	17,080	
5	14.5	62.5	17,080	-	17,080	
GARAGE	4	17.5	45	13,485	11,190	2,295
	3	10	35	20,408	17,879	2,529
	2	10	25	20,408	17,879	2,529
	MEZZANINE	10	10	18,960	14,973	3,987
LOBBY	1	25	0	20,200	7,095	13,105
TOTAL				488,496	69,016	419,480

PROJECT INFORMATION

PROJECT NAME:	1431 FRANKLIN OFFICES
PROJECT ADDRESS:	1431 FRANKLIN STREET OAKLAND, CA 94612
OWNER:	TIDEWATER CAPITAL
APN:	8-621-8-7
ZONING:	CENTRAL BUSINESS DISTRICT PEDESTRIAN RETAIL COMMERCIAL ZONE (CBD-P)
TOTAL LOT AREA:	20,974 SQUARE FEET
FLOOR AREA RATION:	20:1 (DOES NOT EXCEED 20:1 MAX RATIO)
FLOOR AREA: (MAX. ALLOWABLE SF)	419,480 SQUARE FEET
TOTAL STORIES:	27 STORIES
Lot Coverage (Allowed)	85%

Notes:

1. Per Chapter 17.09.040: "Floor area," for all projects except those with one or two dwelling units on a lot, means the total of the gross horizontal areas of all floors, including usable basements, below the roof and within the outer surfaces of the main walls of principal or accessory buildings or the center lines of party walls separating such buildings or portions thereof, or within lines drawn parallel to and two (2) feet within the roof line of any building or portion thereof without walls, but excluding the following: a.Areas used for off-street parking spaces or loading berths and driveways and maneuvering aisles relating thereto;b.Areas which qualify as usable open space under the standards for required usable open space in Chapter 17.126;c.In the case of Nonresidential Facilities: arcades, porticoes, and similar open areas which are located at or near street level, which are accessible to the general public, and which are not designed or used as sales, display, storage, service, or production areas.

PARKING SUMMARY

OFFICE SQFT	STALLS / SQFT	TOTAL
329,776	1 / 300 @ GROUND LEVEL	1,099
	1 / 500 @ ALL OTHER LEVELS	660
ALLOWED		1,759
PROVIDED		100

BICYCLE PARKING SUMMARY

	FLOOR AREA	BIKES / SQFT	TOTAL
LONG-TERM	419,480	1 BIKE / 10,000 SQFT	41.95
SHORT-TERM	419,480	1 BIKE / 20,000 SQFT	20.97
REQUIRED			63
PROVIDED			63

INFORMATION


APPENDIX



APPENDIX - PROJECTED SHADOW STUDY



MARCH/SEPTEMBER - 9AM

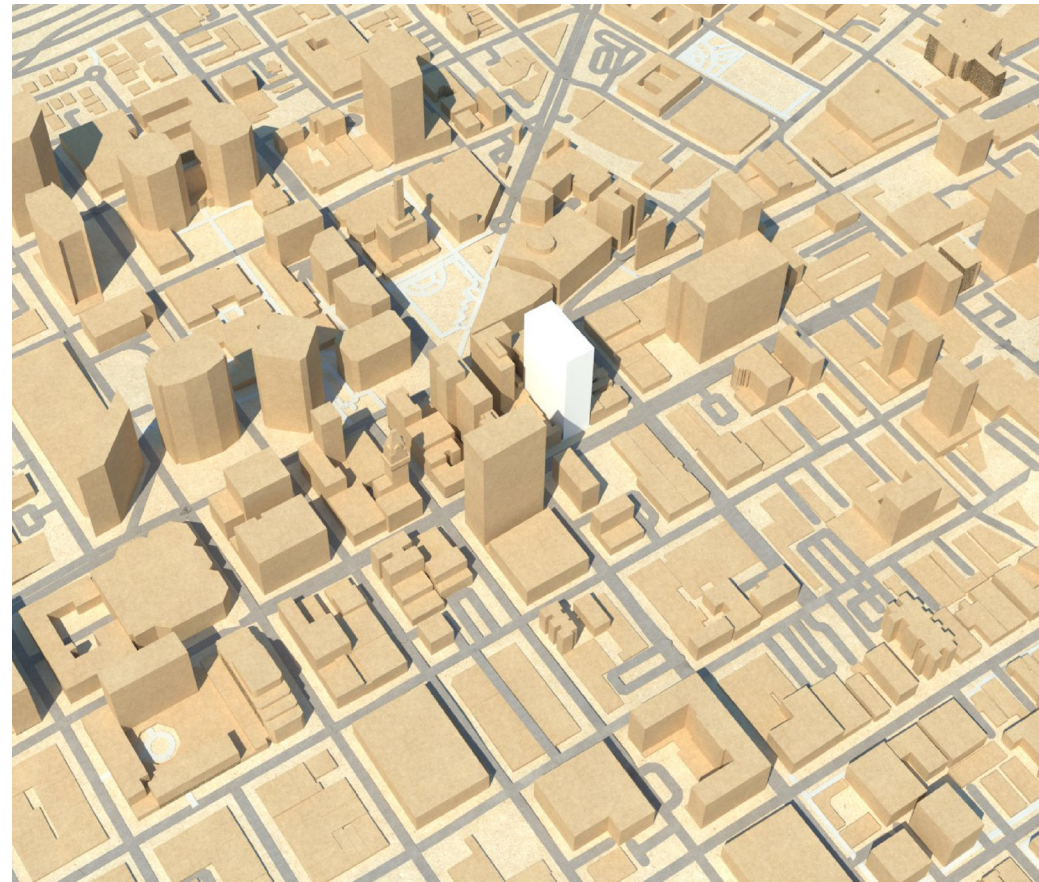


MARCH/SEPTEMBER - 12PM




MARCH/SEPTEMBER - 3PM

APPENDIX - SHADOW STUDIES

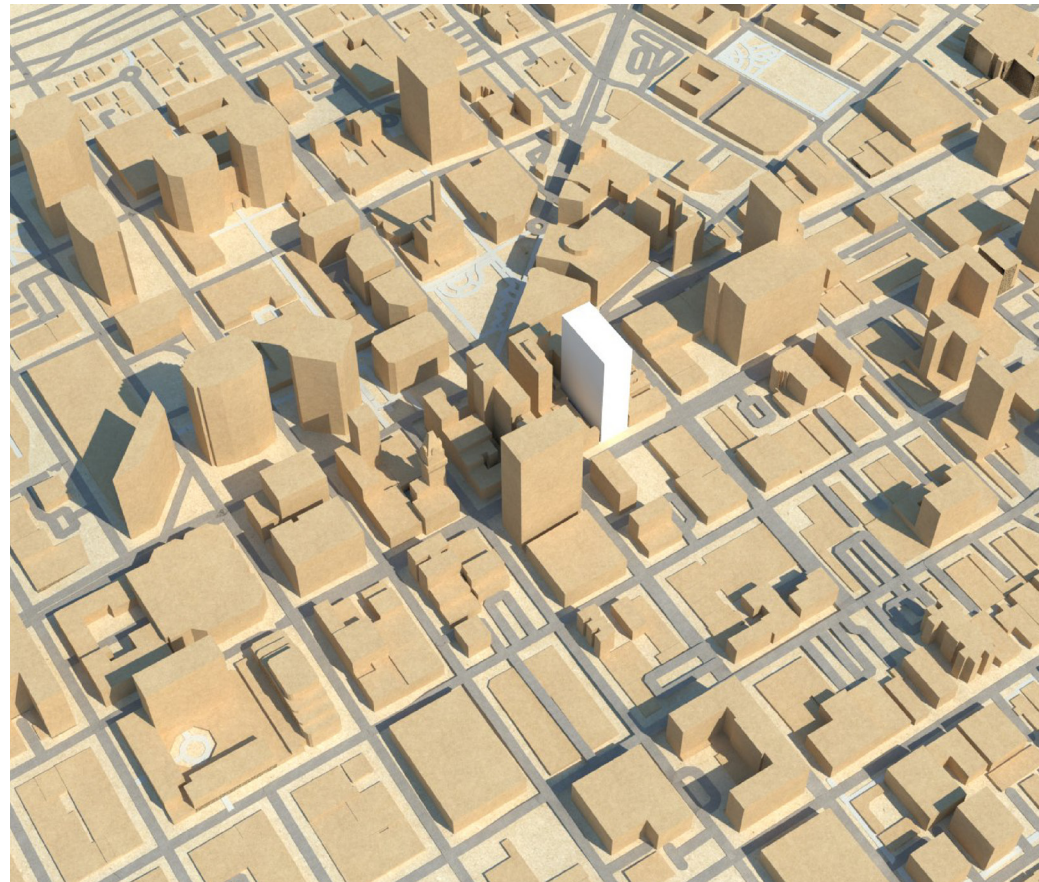

JUNE - 9AM

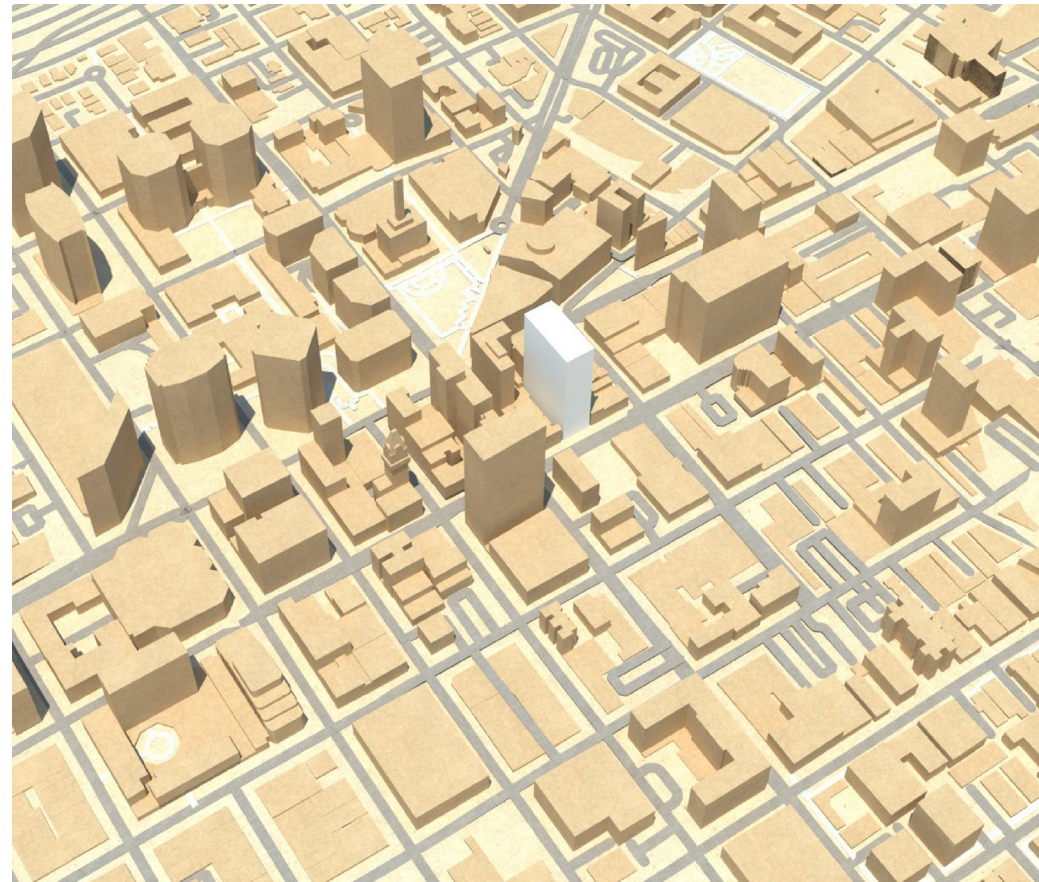


JUNE - 12PM




JUNE - 3PM


APPENDIX - SHADOW STUDIES

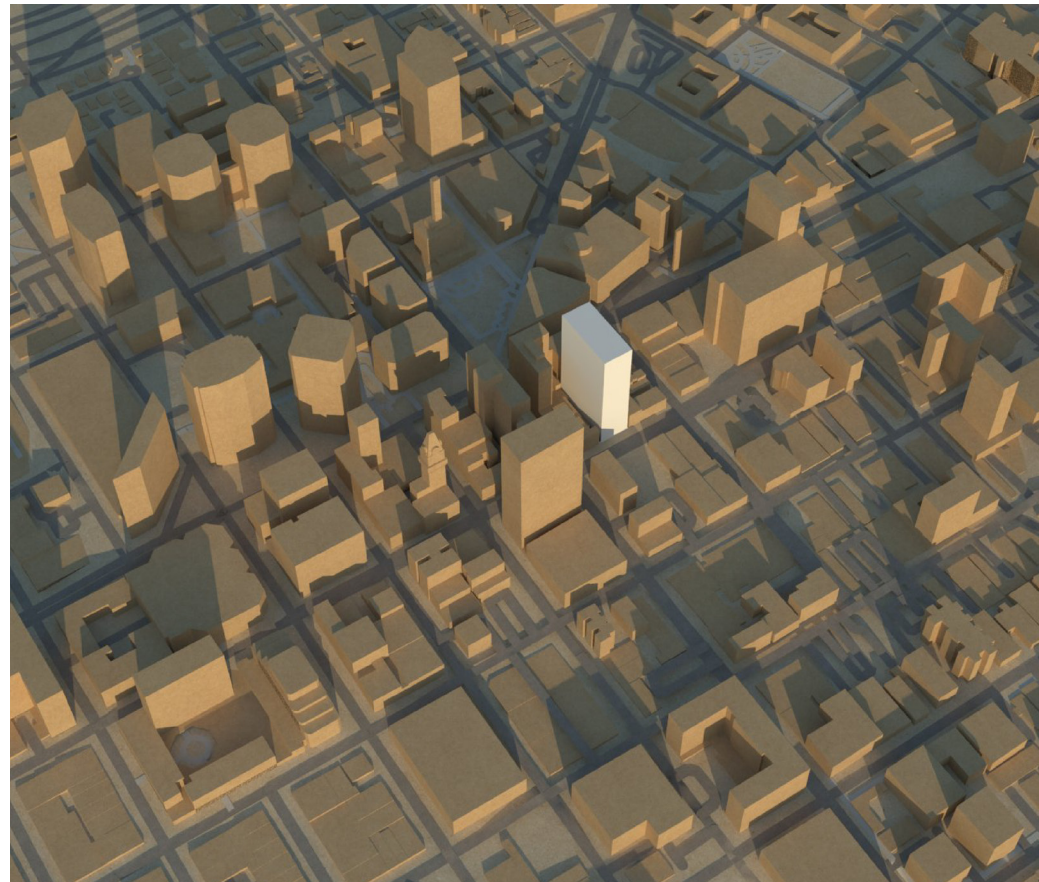

DECEMBER - 9AM

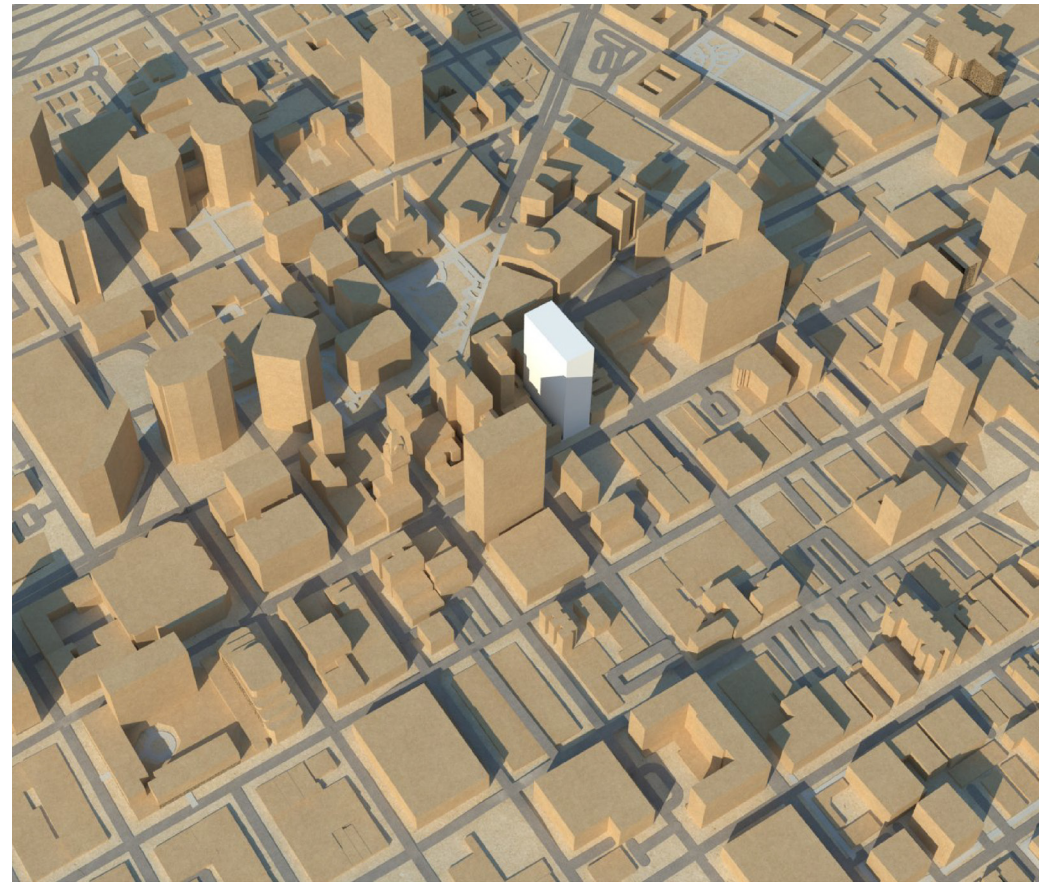


DECEMBER - 12PM

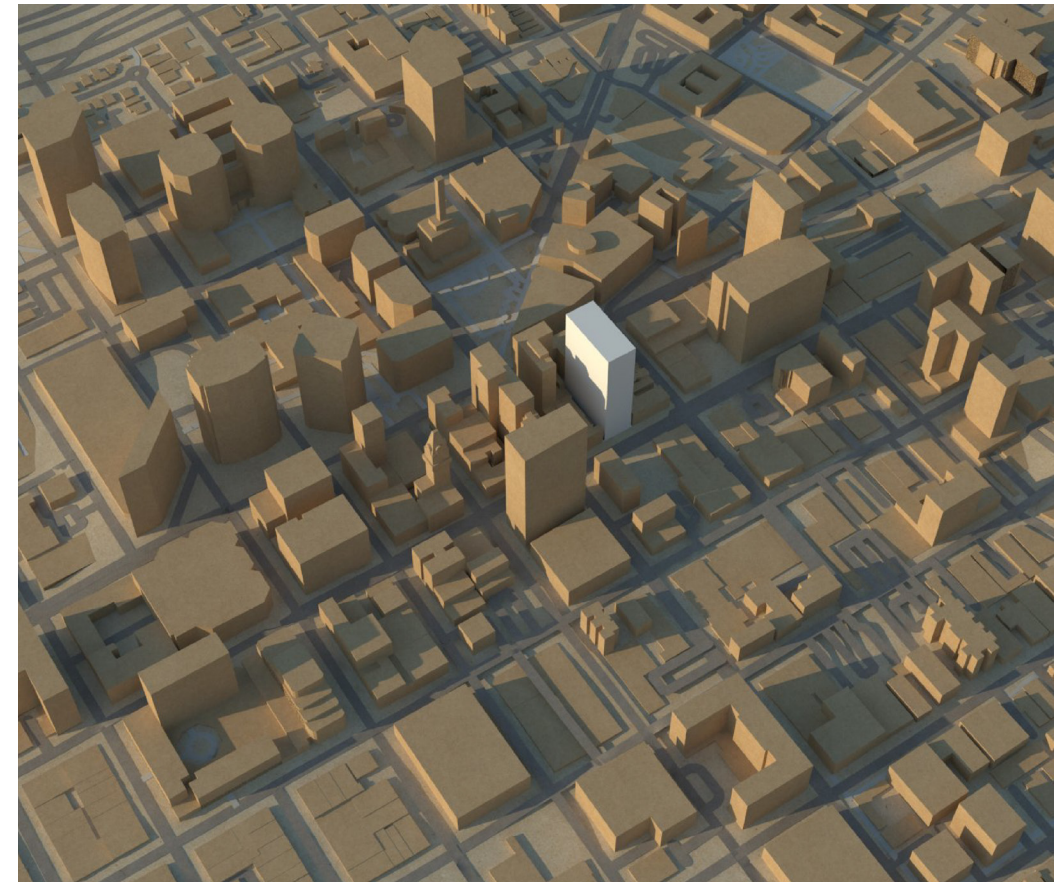

DECEMBER - 3PM


APPENDIX - SHADOW STUDIES

Urban Double Stacker - Standard Aisle

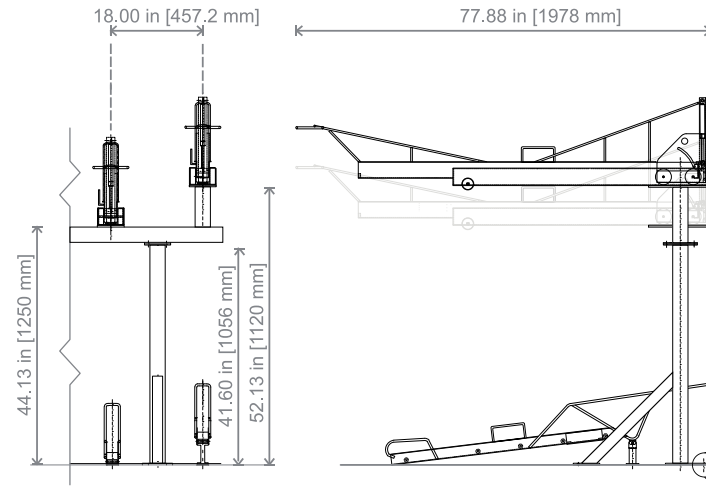

Specifications

Capacity	
Bicycles per set	2 (one up and one down)
Bicycle spacing	18.00 or 24.00 in [457.2 or 609.6 mm]
Rise differential	6.00 or 8.00 in [152.4 or 203.4 mm]
Weight	
Per two bicycle spaces	± 89.65 lbs [40.75 kg]
Materials	
Assembly material	Steel
Available finishes	
Powder coated (RAL 7016 - Anthracite Grey)	
Hot Dipped Galvanized	

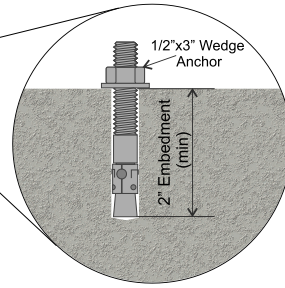

These drawings are not for construction purposes and are for information purposes only. All information contained herein was current at the time of development but must be reviewed and confirmed by Urban Racks to be considered accurate.

URBAN RACKS
INNOVATIVE | BICYCLE PARKING

1-888-717-8881 sales@urbanracks.com
For more product and company information, please visit us at www.urbanracks.com

**DOUBLE STACKER BIKE PARKING
(LONG TERM)**



CAPITOL™ BIKE RACK


PRODUCT DATA

The Capitol Bike Rack's solid, corrosion-resistant cast aluminum body provides the strength necessary to stand up to continuous use while its simple, space-saving design allows it to engage with its surrounding environment as much or as little as desired. With a design perfect for cityscapes and other contemporary architectural settings, the Capitol Bike Rack is a solution for environments of all types.

MATERIAL & FINISHES

MATERIAL	FINISHES	GUIDELINES & SECURITY	INSTALLATION	MAINTENANCE
• Body is made of corrosion-resistant cast aluminum with powdercoat finish.	• See the Forms+Surfaces Powdercoat Chart for details. Custom RAL colors are available for an upcharge. • Due to the inherent nature of metal castings, gloss powdercoats are not offered for cast components.	• Meets Association of Pedestrian and Bicycle Professionals (APBP) guidelines. • A locking point detail and mounting configurations that meet APBP guidelines can be found on page 1 and 2 of this document.	• Capitol Bike Racks must be surface mounted with embedded anchors. Stainless steel anchors and tamper-resistant stainless steel screws are included.	• Metal surfaces can be cleaned as needed using a soft cloth or brush with warm water and a mild detergent. Avoid abrasive cleaners.

NOMINAL DIMENSIONS

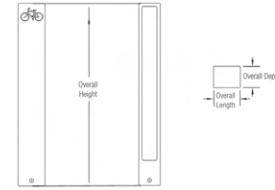


OVERALL LENGTH	OVERALL DEPTH	OVERALL HEIGHT	WEIGHT
5' (127 mm)	4" (102 mm)	34" (864 mm)	25 lbs (11.4 kg)

LOCKING POINT AND CONFIGURATION EXAMPLES

The Capitol Bike Rack was designed to allow for a multitude of locking point and configuration options to meet your individual needs. Please note that for optimal performance, Forms+Surfaces recommends a 36° center-to-center placement. See diagrams below and the separate installation instructions document for more details.



A standard U-lock can be locked at this location to meet APBP guidelines for security and functionality.

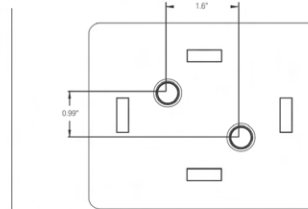

LOCKING POINT EXAMPLE

T 800.451.0410 | www.forms-surfaces.com

© 2017 Forms+Surfaces® | All dimensions are nominal. Specifications and pricing subject to change without notice. For the most current version of this document, please refer to our website at www.forms-surfaces.com.


page 1 of 2 | Rev. 06-14-17



CAPITOL™ BIKE RACK

PRODUCT DATA

LOCKING POINT AND CONFIGURATION EXAMPLES (Continued)

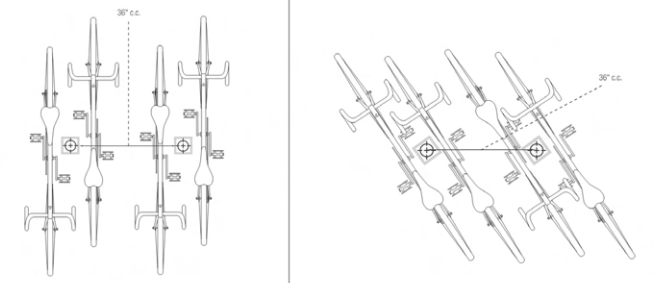

CONFIGURATION EXAMPLE A

CONFIGURATION EXAMPLE B

ENVIRONMENTAL CONSIDERATIONS

- Please refer to the Capitol Bike Rack Environmental Data Sheet for detailed environmental impact information.
- Capitol aluminum casting has up to 95% recycled content and is fully recyclable.
- Standard powdercoat finishes are no-VOC; non-standard powdercoat finishes are no- or low-VOC, depending on color.
- Low maintenance.

MODEL NUMBER AND DESCRIPTION

MODEL	DESCRIPTION
SKCAP	Capitol Bike Rack

PRODUCT OPTIONS

The following options are available for an upcharge

Premium Texture Colors from Forms+Surfaces Powdercoat Chart
Custom RAL powdercoat color

LEAD TIME: 4 weeks. Shorter lead times may be available upon request. Please contact us to discuss your specific timing requirements.

PRICING: Please contact us at 800.451.0410 or sales@forms-surfaces.com. At Forms+Surfaces, we design, manufacture and sell our products directly to you. Our sales team is available to assist you with questions about our products, requests for quotes, and orders. Territory Managers are located worldwide to assist with the front-end specification and quoting process, and our in-house Project Sales Coordinators follow your project through from the time you place an order to shipment.

TO ORDER SPECIFY: Quantity, model, powdercoat color for body casting. Quote/Order Forms are available on our website to lead you through the specification process in a simple checkbox format.


T 800.451.0410 | www.forms-surfaces.com

FORMS+SURFACES®

© 2017 Forms+Surfaces® | All dimensions are nominal. Specifications and pricing subject to change without notice. For the most current version of this document, please refer to our website at www.forms-surfaces.com.

page 2 of 2 | Rev. 06-14-17


©2017 Urban Bicycle Parking Systems Inc.

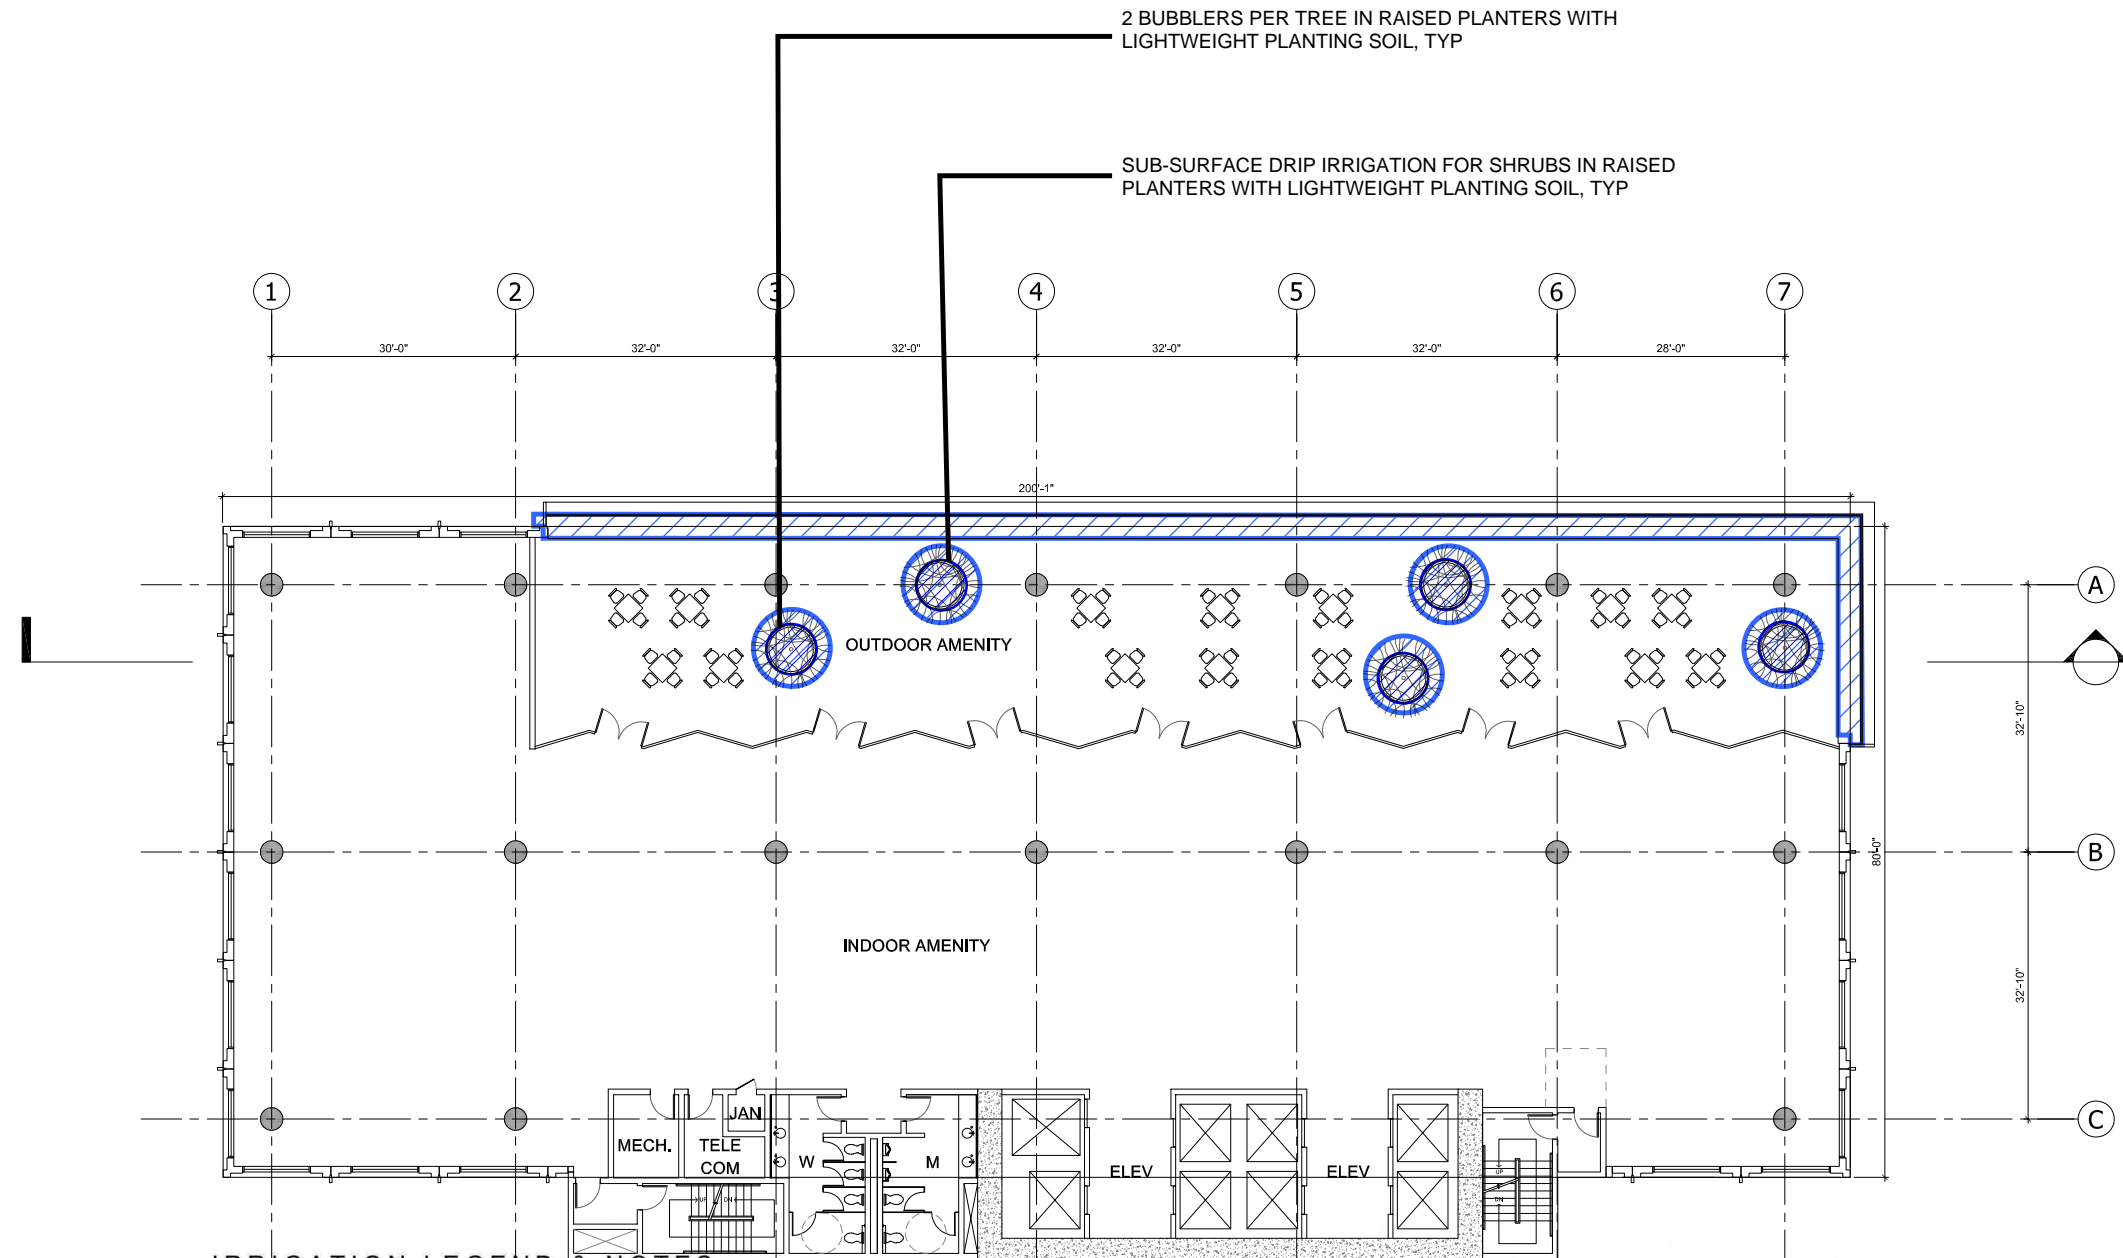

2 BUBBLERS PER TREE IN RAISED PLANTERS WITH LIGHTWEIGHT PLANTING SOIL, TYP

SUB-SURFACE DRIP IRRIGATION FOR SHRUBS IN RAISED PLANTERS WITH LIGHTWEIGHT PLANTING SOIL, TYP

IRRIGATION LEGEND & NOTES



SUBSURFACE DRIP IRRIGATION VALVED FOR SEPERATE HYDROZONES WITH SIMILAR EXPOSURE AND PLANT WATER USE. 0.5 GPH DRIPPERLINE WITH EMITTERS SPACING AT 12" OC TYPICAL.

WATER METER: IRRIGATION WATER PROVIDED BY DEDICATED POTABLE WATER SERVICE METER OR SUB METER.

BACKFLOW: BACKFLOW PREVENTION DEVICE AS REQUIRED TO PROTECT WATER SUPPLY FROM CONTAMINATION.

CONTROLLER: SMART ET-BASED IRRIGATION CONTROLLER WITH FLOW SENSOR AND MASTER SHUT-OFF VALVE.

TREE BUBBLERS: ALL TREES IRRIGATED WITH TWO FLOOD BUBBLERS


THIS PROJECT WILL APPLY THE CRITERIA OF TITLE 23 MODEL WATER EFFICIENT LANDSCAPE ORDINANCE FOR EFFICIENT USE OF WATER IN THE LANDSCAPE.

IRRIGATED LANDSCAPE AREA (THIS FLOOR) 24 SQ. FT.
TOTAL IRRIGATED LANDSCAPE (TOTAL PROJECT) 773 SQ. FT.

FLOOR PLAN AMENITY

SCALE: x" = 1'-0" 0' 5' 15' 30'



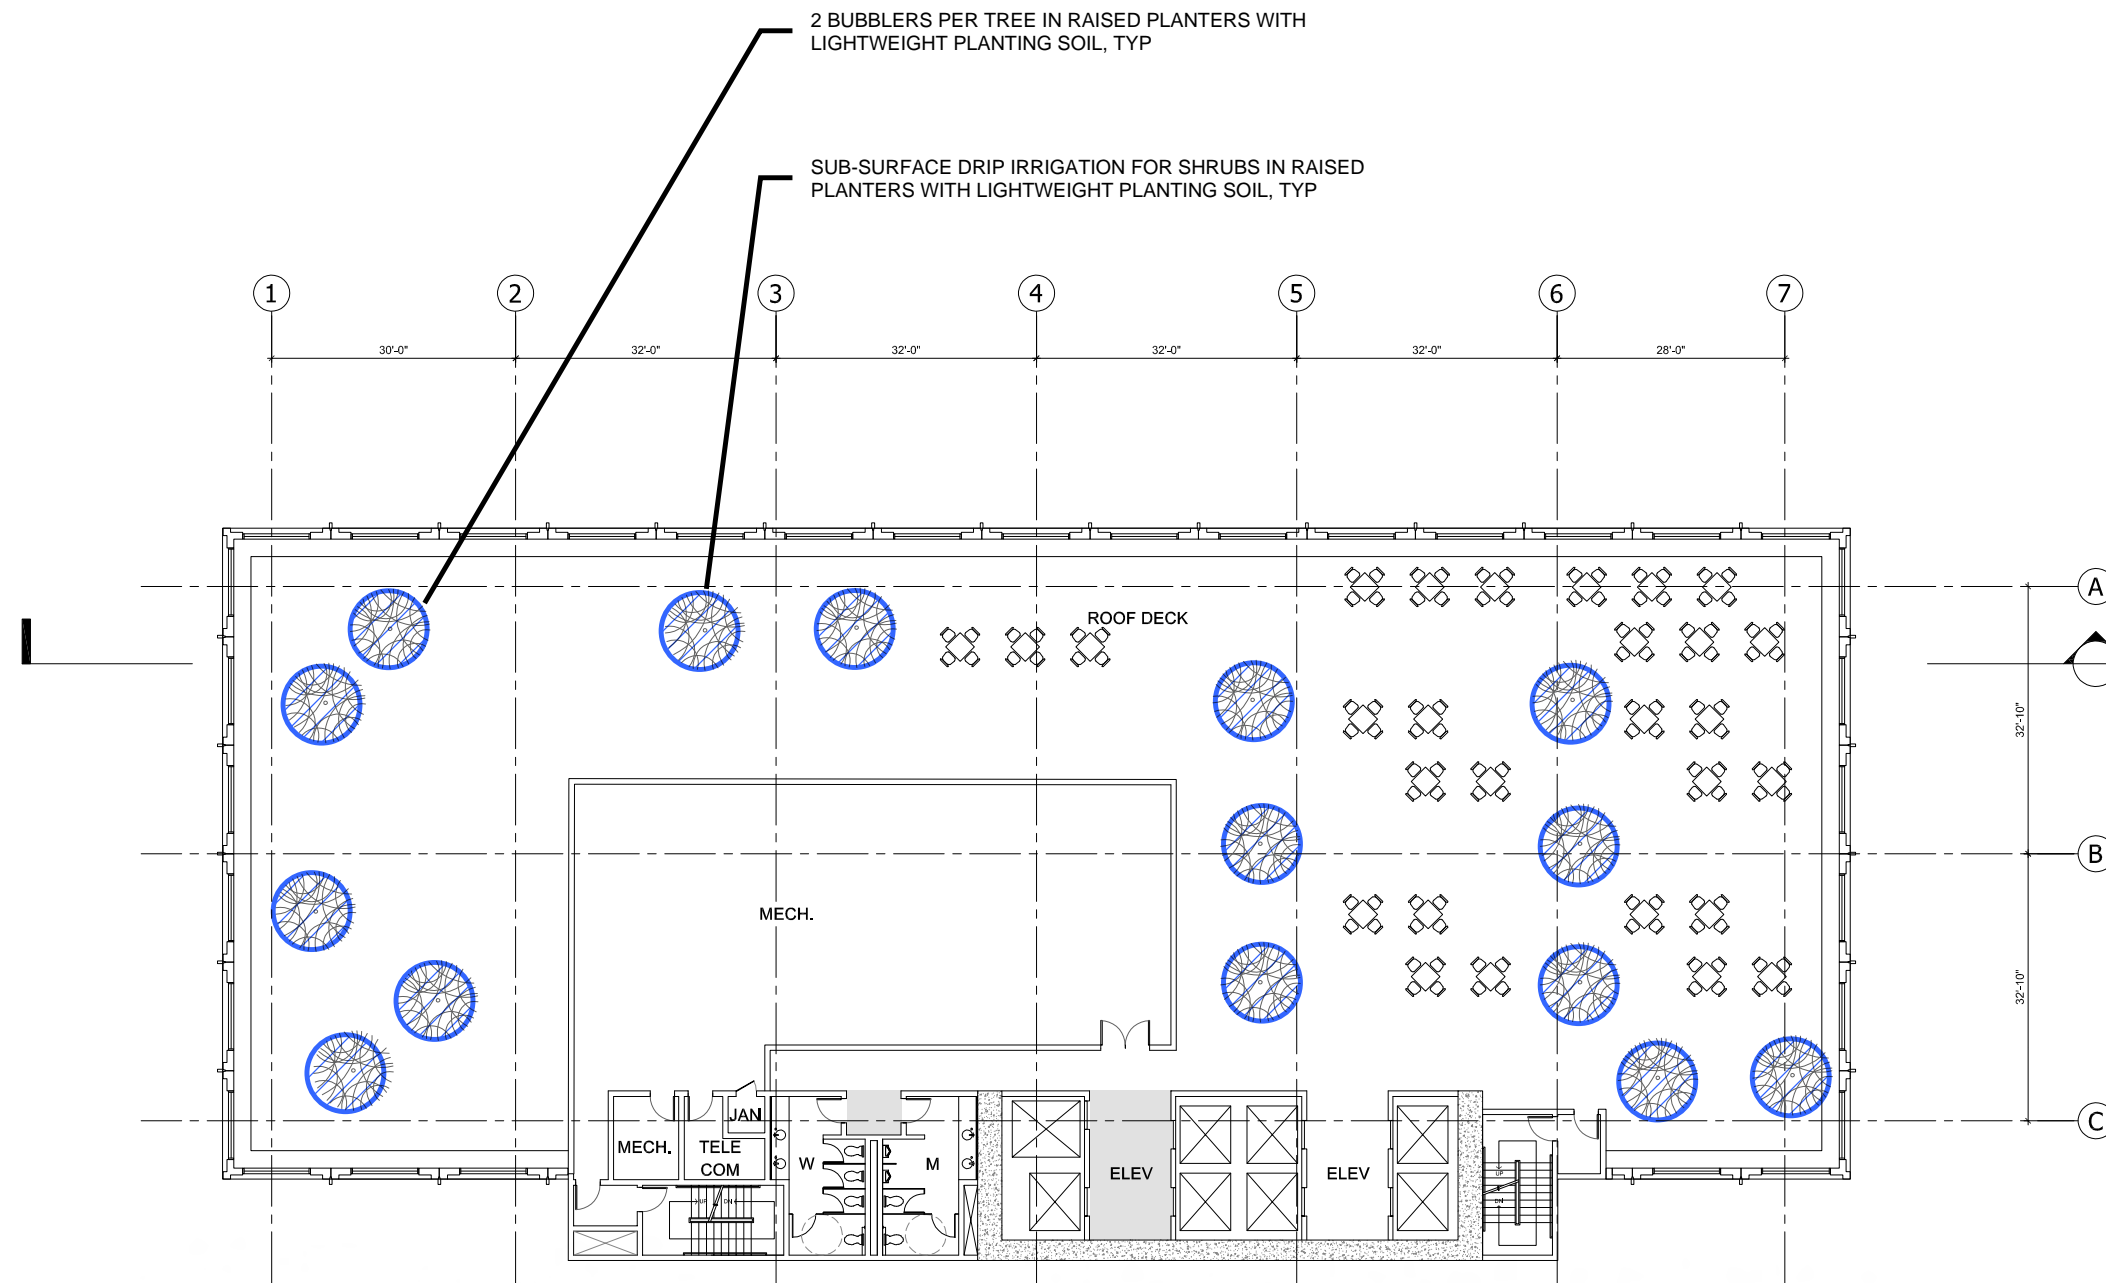

2 BUBBLERS PER TREE IN RAISED PLANTERS WITH LIGHTWEIGHT PLANTING SOIL, TYP

SUB-SURFACE DRIP IRRIGATION FOR SHRUBS IN RAISED PLANTERS WITH LIGHTWEIGHT PLANTING SOIL, TYP

IRRIGATION LEGEND & NOTES



SUBSURFACE DRIP IRRIGATION VALVED FOR SEPERATE HYDROZONES WITH SIMILAR EXPOSURE AND PLANT WATER USE. 0.5 GPH DRIPPERLINE WITH EMITTERS SPACING AT 12" OC TYPICAL.

IRRIGATED LANDSCAPE AREA (THIS FLOOR) 24 SQ. FT.
 TOTAL IRRIGATED LANDSCAPE (TOTAL PROJECT) 773 SQ. FT.

WATER METER: IRRIGATION WATER PROVIDED BY DEDICATED POTABLE WATER SERVICE METER OR SUB METER.

BACKFLOW: BACKFLOW PREVENTION DEVICE AS REQUIRED TO PROTECT WATER SUPPLY FROM CONTAMINATION.

CONTROLLER: SMART ET-BASED IRRIGATION CONTROLLER WITH FLOW SENSOR AND MASTER SHUT-OFF VALVE.


TREE BUBBLERS: ALL TREES IRRIGATED WITH TWO FLOOD BUBBLERS

THIS PROJECT WILL APPLY THE CRITERIA OF TITLE 23 MODEL WATER EFFICIENT LANDSCAPE ORDINANCE FOR EFFICIENT USE OF WATER IN THE LANDSCAPE.

FLOOR PLAN - ROOF

SCALE: x" = 1'-0" 0' 5' 15' 30'





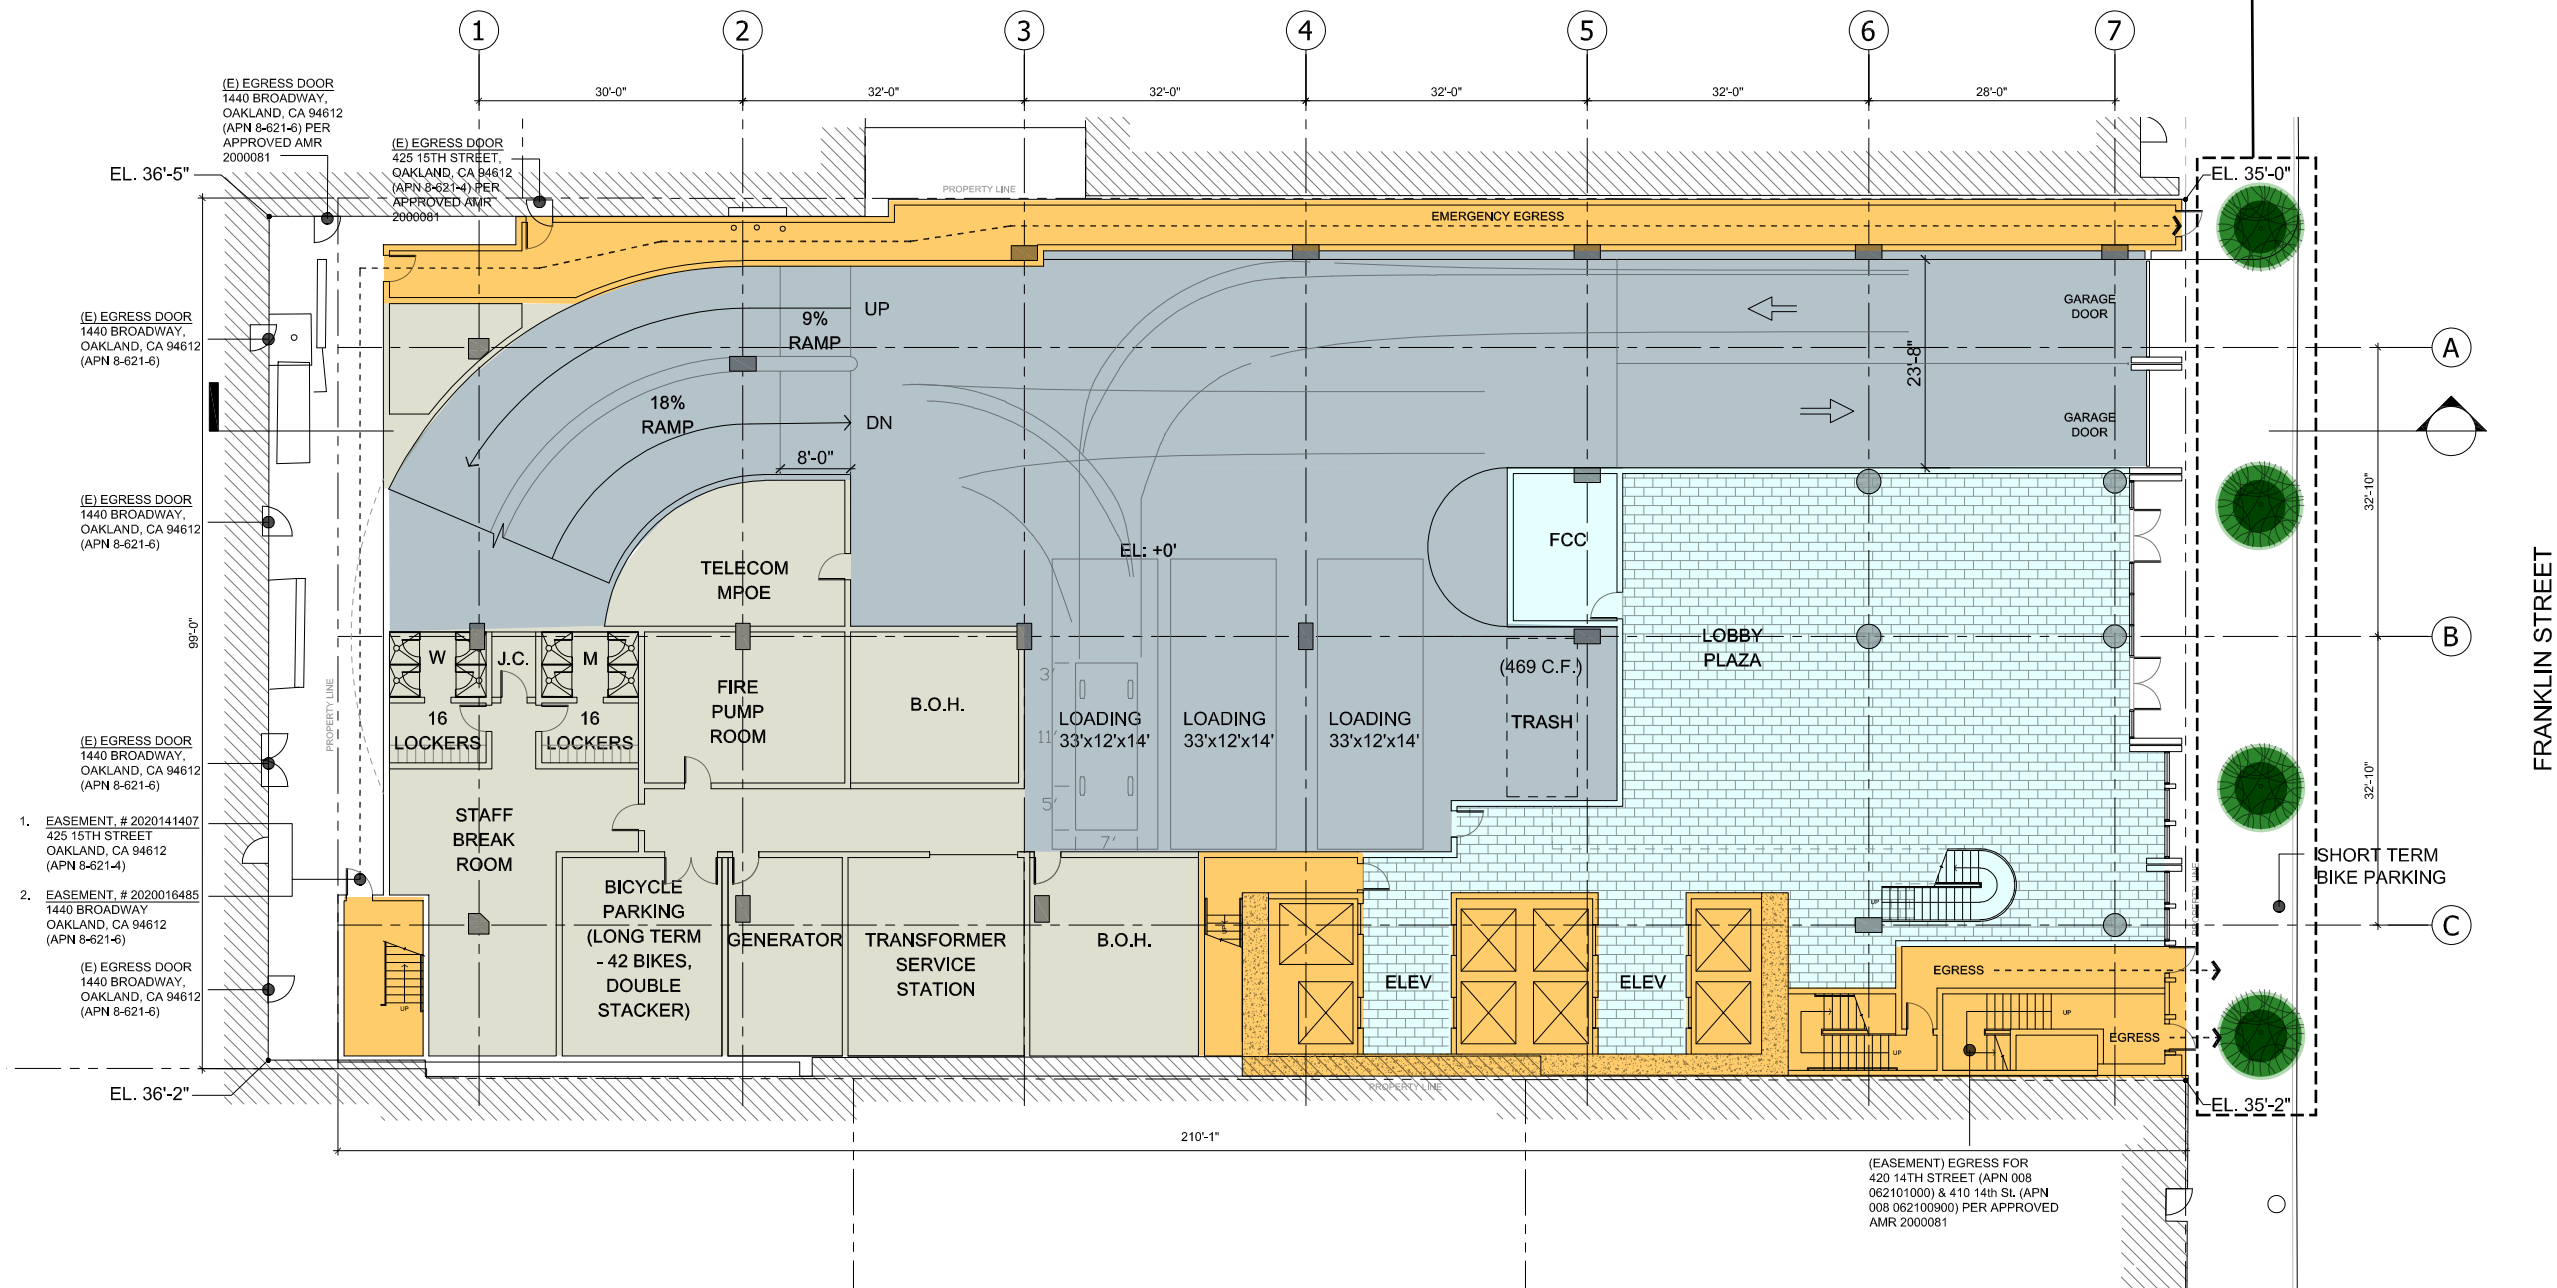


FLOOR PLAN (LEVEL 1)

SCALE: x" = 1'-0" 0' 5' 15' 30'



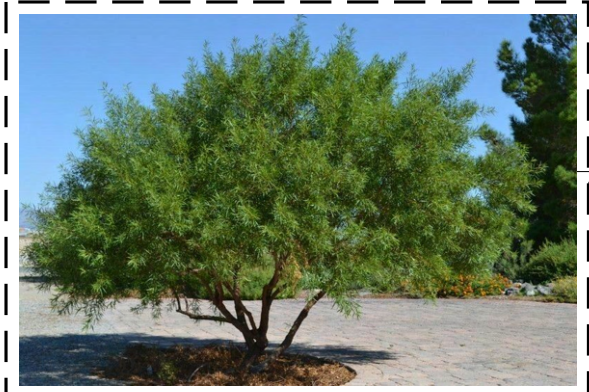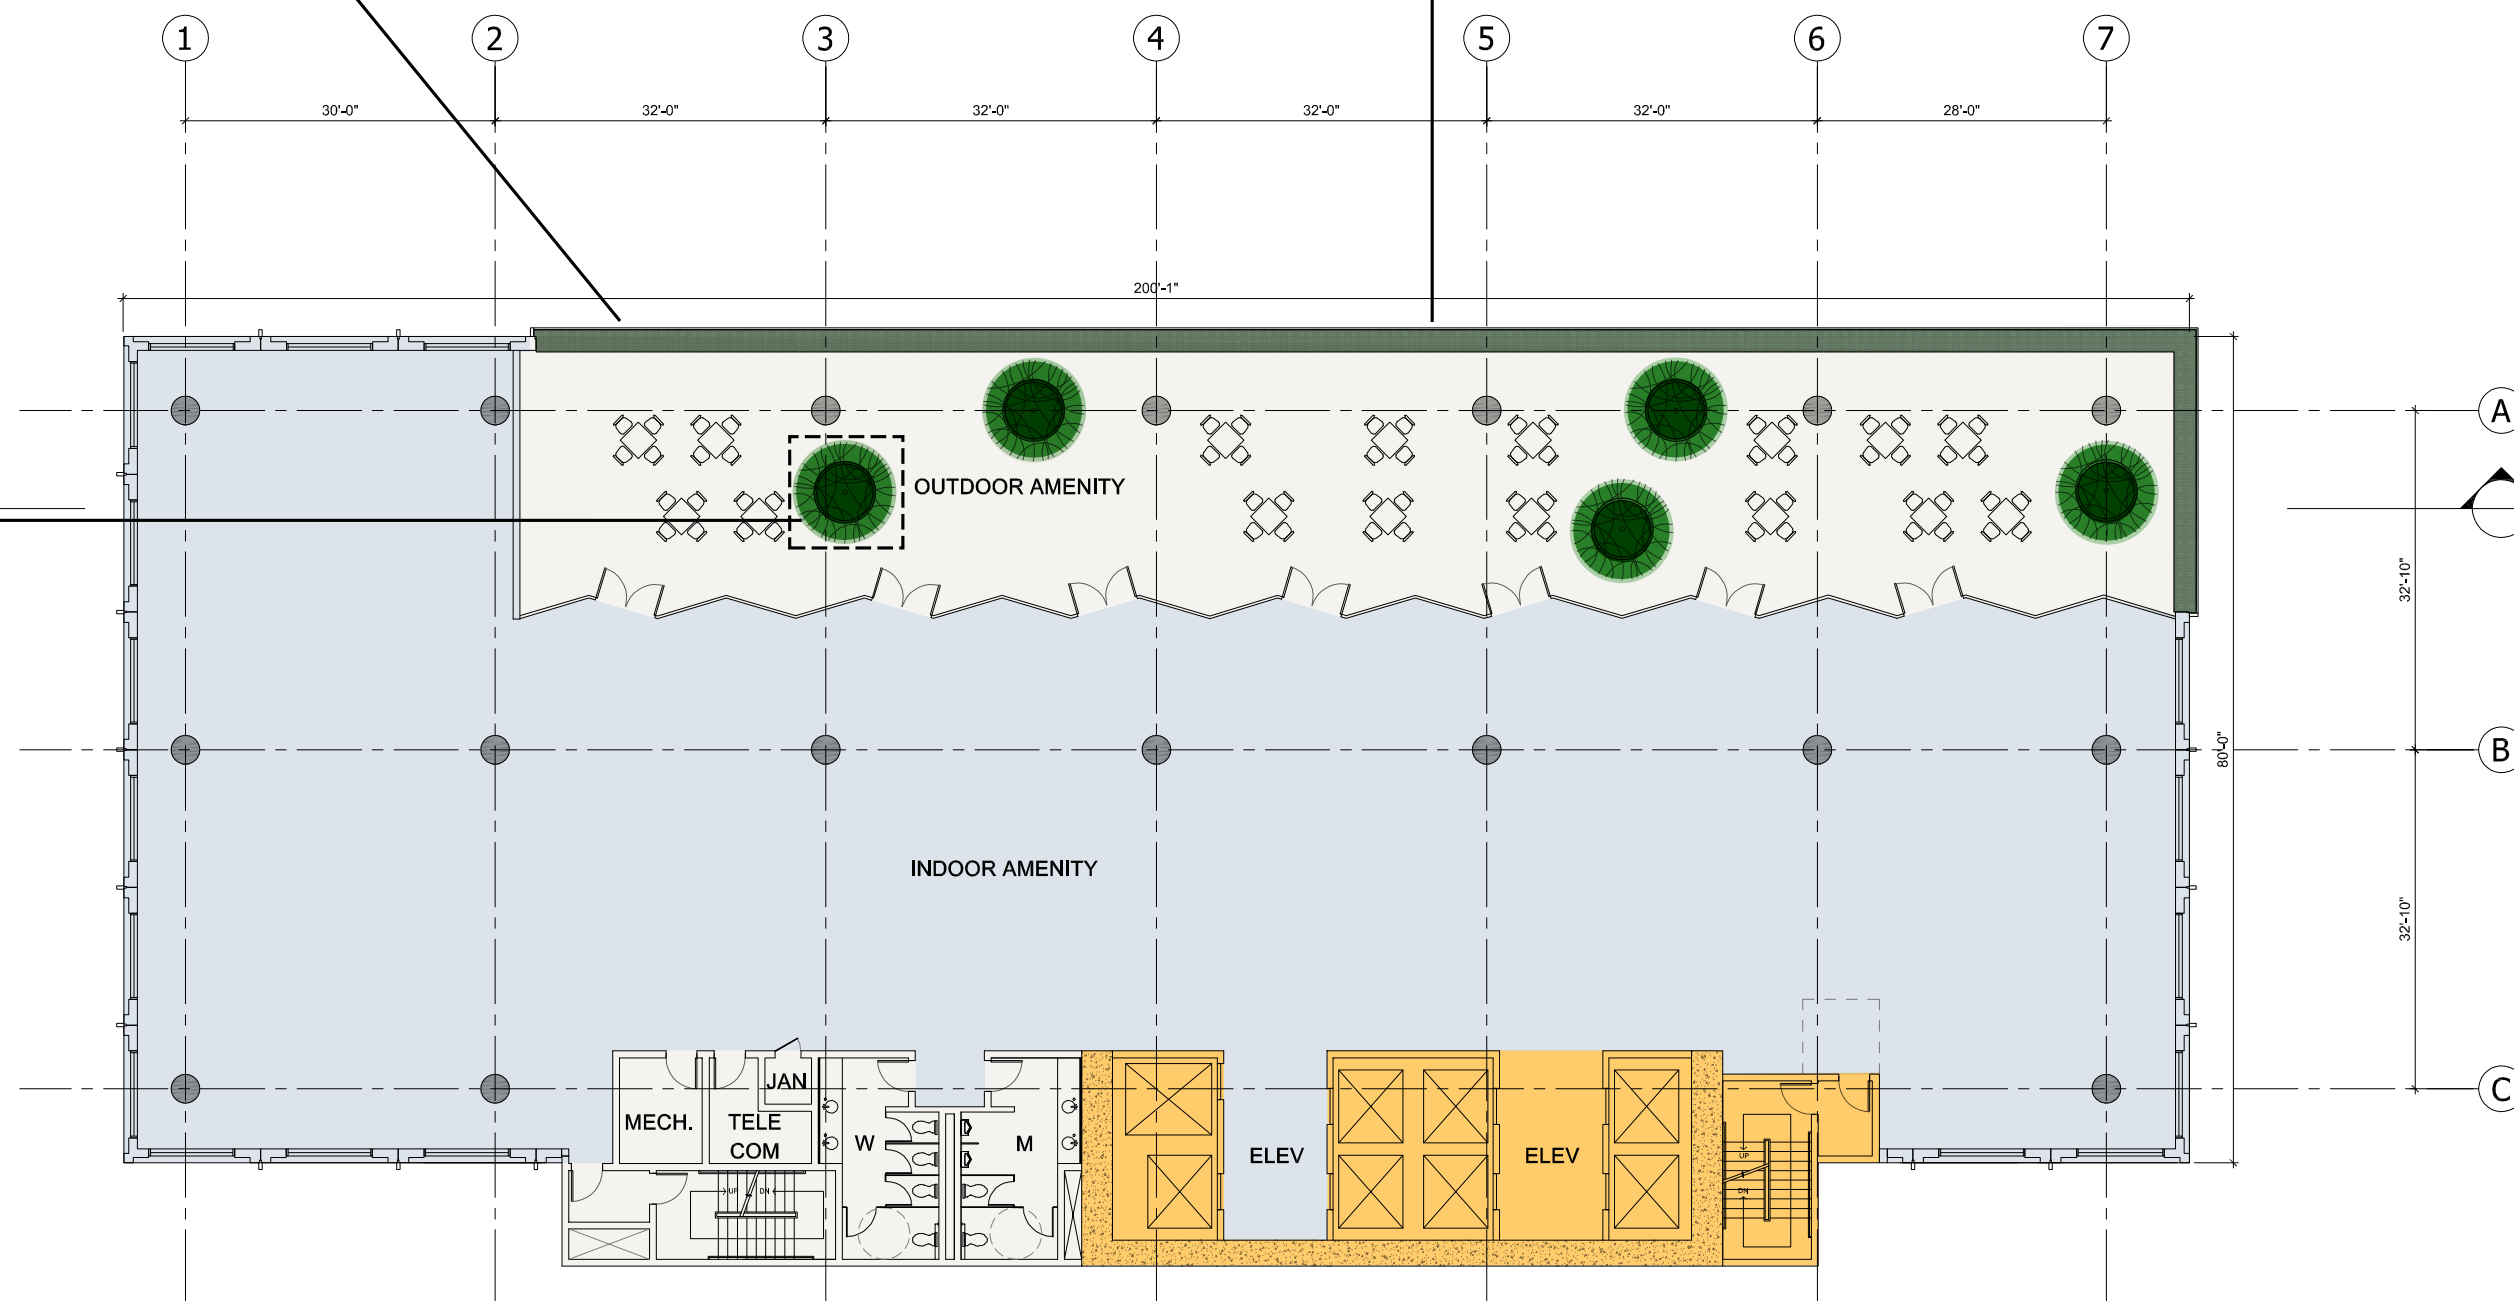

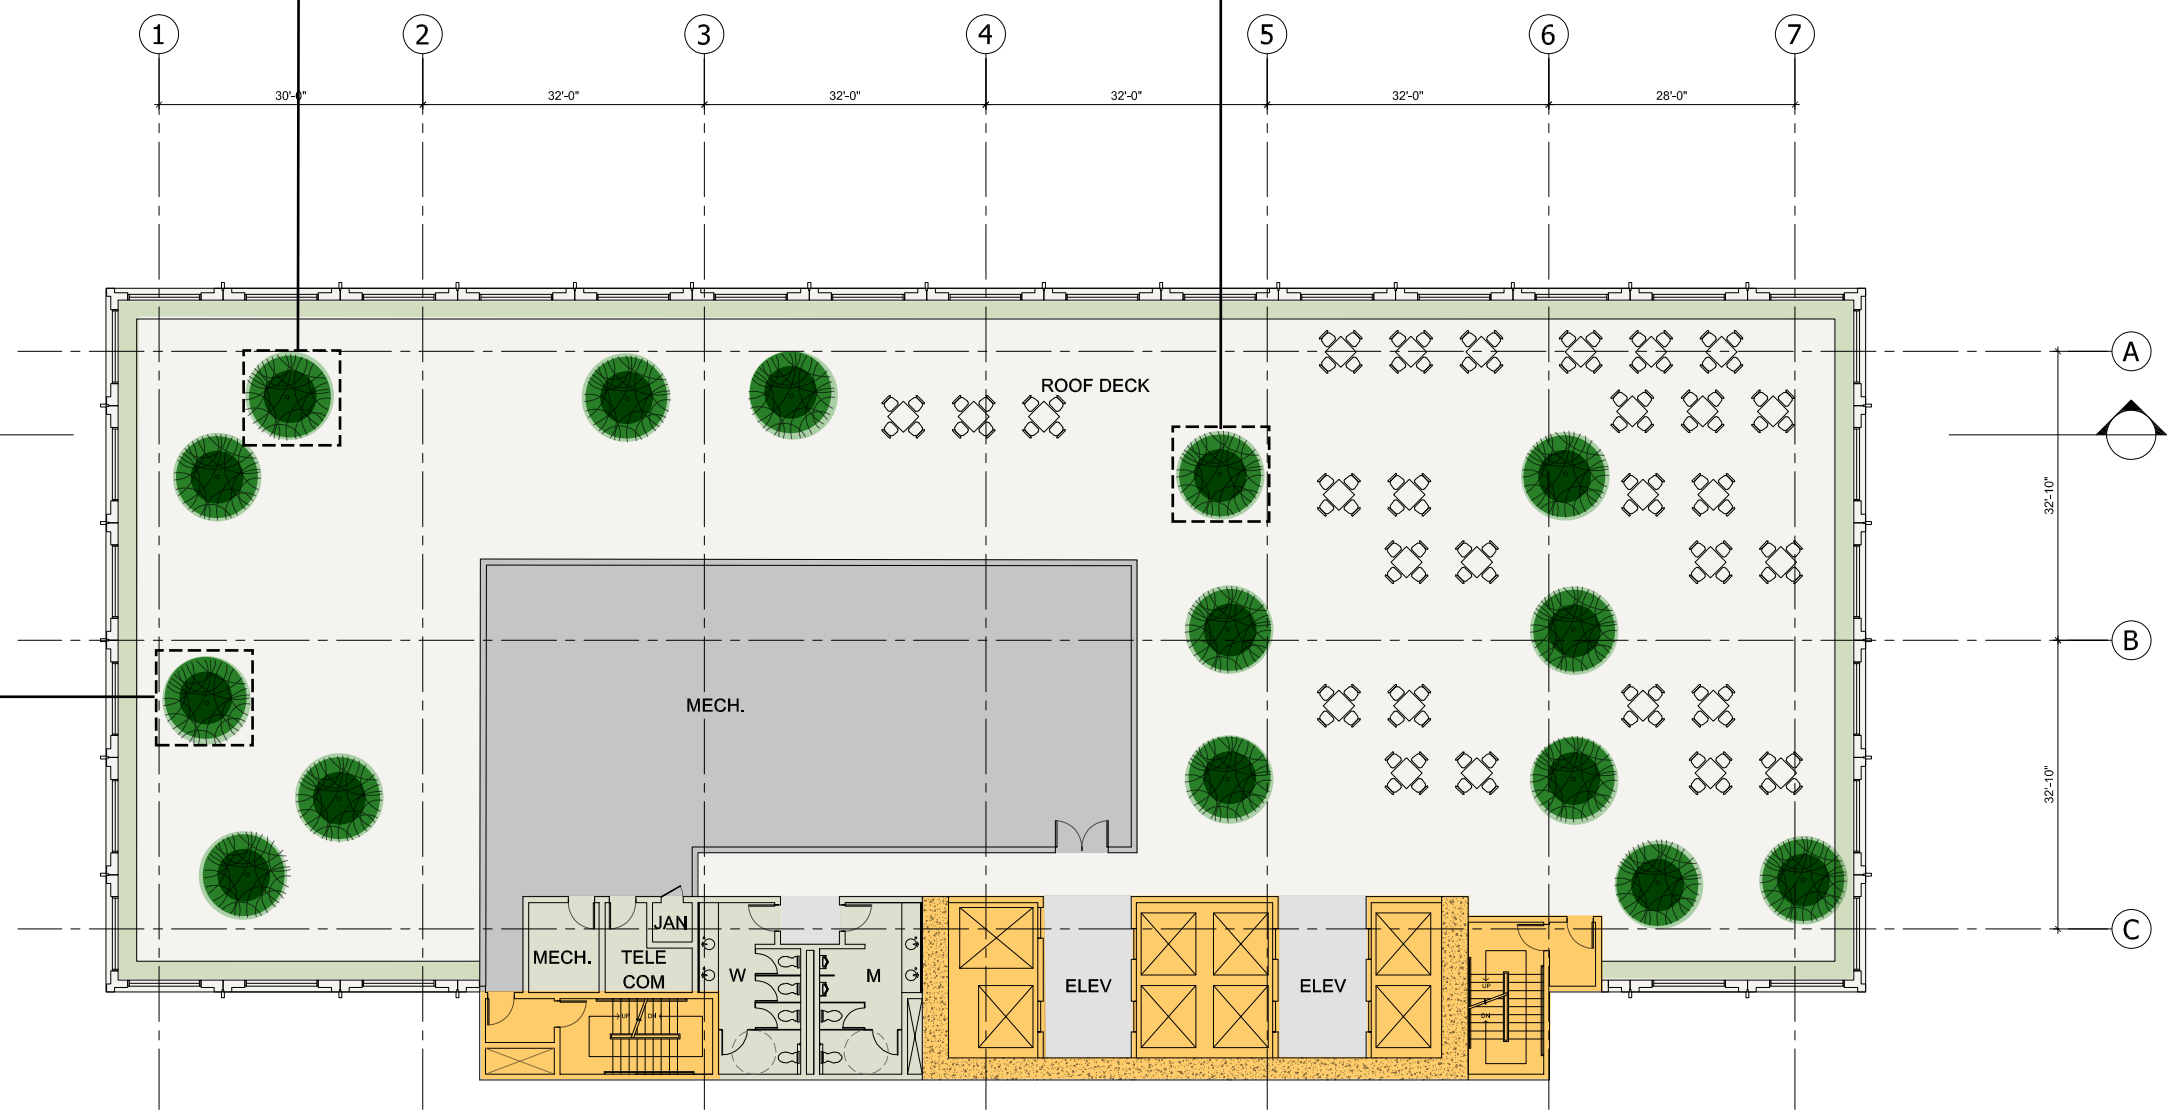

FLOOR PLAN (ROOF)

SCALE: 1/4" = 1'-0"

0' 5' 15' 30'




JONATHAN P. SHATTUCK PLS 8940



1431 FRANKLIN ST
APN 8-621-8-7
OAKLAND CA, ALAMEDA COUNTY
TOPOGRAPHIC MAP

Date: 04-20-2020	No.	1
Scale: AS SHOWN		
Design: MOK		
Drawn: MOK		
APN: 8-621-8-7		
Job No: 200945		
Drawing Number:		1

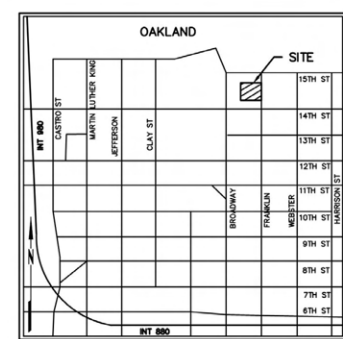

VICINITY MAP
NOT TO SCALE

SYMBOLS & LEGEND

- EXISTING**
- CITY MONUMENT
 - NAIL AND TAG
 - VALVE
 - FIRE HYDRANT
 - FIRE DEPARTMENT CONNECTION
 - RISER
 - SIGN
 - STREET LIGHT
 - LIGHT POLE
- PROPERTY LINE
- ADJOINER PROPERTY LINE
- CENTER LINE
- MONUMENT LINE
- FENCE
- STORM DRAIN
- SANITARY SEWER
- WATER
- UNDERGROUND ELECTRIC LINE
- UNDERGROUND GAS LINE
- UNDERGROUND TELECOM LINE
- PARKING STRIPE
- BUILDING WALL
- CONCRETE

ABBREVIATIONS

- | | |
|------------------------------|-----------------------------|
| AC ASPHALT CONCRETE | PGE PACIFIC GAS & ELECTRIC |
| APN ASSESSOR'S PARCEL NUMBER | SD RAIN WATER LEADER |
| BLRD BOLLARD | SDM STORM DRAIN |
| CO CLEAN OUT | SDMH STORM DRAIN MANHOLE |
| CONC CONCRETE | SL STREETLIGHT |
| DI DROP INLET | SS SANITARY SEWER |
| DIA DIAMETER | SSMH SANITARY SEWER MANHOLE |
| DW DRIVEWAY | TC TOP FACE OF CURB |
| E ELECTRIC | TEL TELECOMMUNICATION |
| EX EXISTING | TG TOP OF GRATE |
| G GAS | TS TRAFFIC SIGNAL |
| GI GRATE INLET | TV TELEVISION |
| INV BOTTOM INSIDE OF PIPE | TYP TYPICAL |
| MB MAILBOX | UB UTILITY BOX |
| MH MANHOLE | VLT VAULT |
| MON MONUMENT | W WATER |
| | WM WATER METER |

BASIS OF BEARINGS: THE BEARING OF NORTH 26°15'00" EAST FOR THE NORTHWESTERLY LINE OF FRANKLIN STREET, AS DESCRIBED IN THE CERTAIN GRANT DEED FILED FOR RECORD ON NOVEMBER 14, 2019 UNDER RECORDER'S SERIES NO. 2019233419, RECORDS OF ALAMEDA COUNTY, WAS TAKEN AS THE BASIS OF BEARINGS FOR THIS MAP.

BENCHMARK: CITY OF OAKLAND BENCHMARK STATION 31/A, STANDARD OAKLAND DISC UNDER STANDARD CASTING IN THE WALK AT THE NORTHEAST CORNER OF 17TH STREET AND BROADWAY 11.3' EAST OF THE EAST CURB OF BROADWAY AND 6.8' NORTH OF THE NORTH CURB OF 17TH STREET. ELEVATION 26.144' (DATUM: CITY OF OAKLAND MEAN SEA LEVEL).



FIELD SURVEY DATE: APRIL 15TH, 2020.

TOPOGRAPHIC NOTES

UNAUTHORIZED CHANGES & USES: THE PROFESSIONAL PREPARING THIS MAP WILL NOT BE RESPONSIBLE FOR, OR LIABLE FOR, UNAUTHORIZED CHANGES TO OR USES OF THIS MAP. CHANGES TO THIS MAP MUST BE REQUESTED IN WRITING AND MUST BE APPROVED BY THE PROFESSIONAL.

THE LOCATIONS OF EXISTING UNDERGROUND FACILITIES SHOWN ON THESE DRAWINGS ARE APPROXIMATE AND ARE BASED ON OBSERVED TOPOGRAPHIC SURFACE FEATURES AND AVAILABLE INFORMATION. THE PROFESSIONAL PREPARING THIS MAP ASSUMES NO RESPONSIBILITY FOR THE ACCURACY OF THESE FACILITIES OR FOR THE INADVERTENT OMISSION OF RELATED INFORMATION.

MISCELLANEOUS BOUNDARY INFORMATION SHOWN HEREON WAS OBTAINED FROM RECORD DATA AND DOES NOT CONSTITUTE A FORMAL BOUNDARY DETERMINATION.

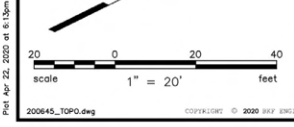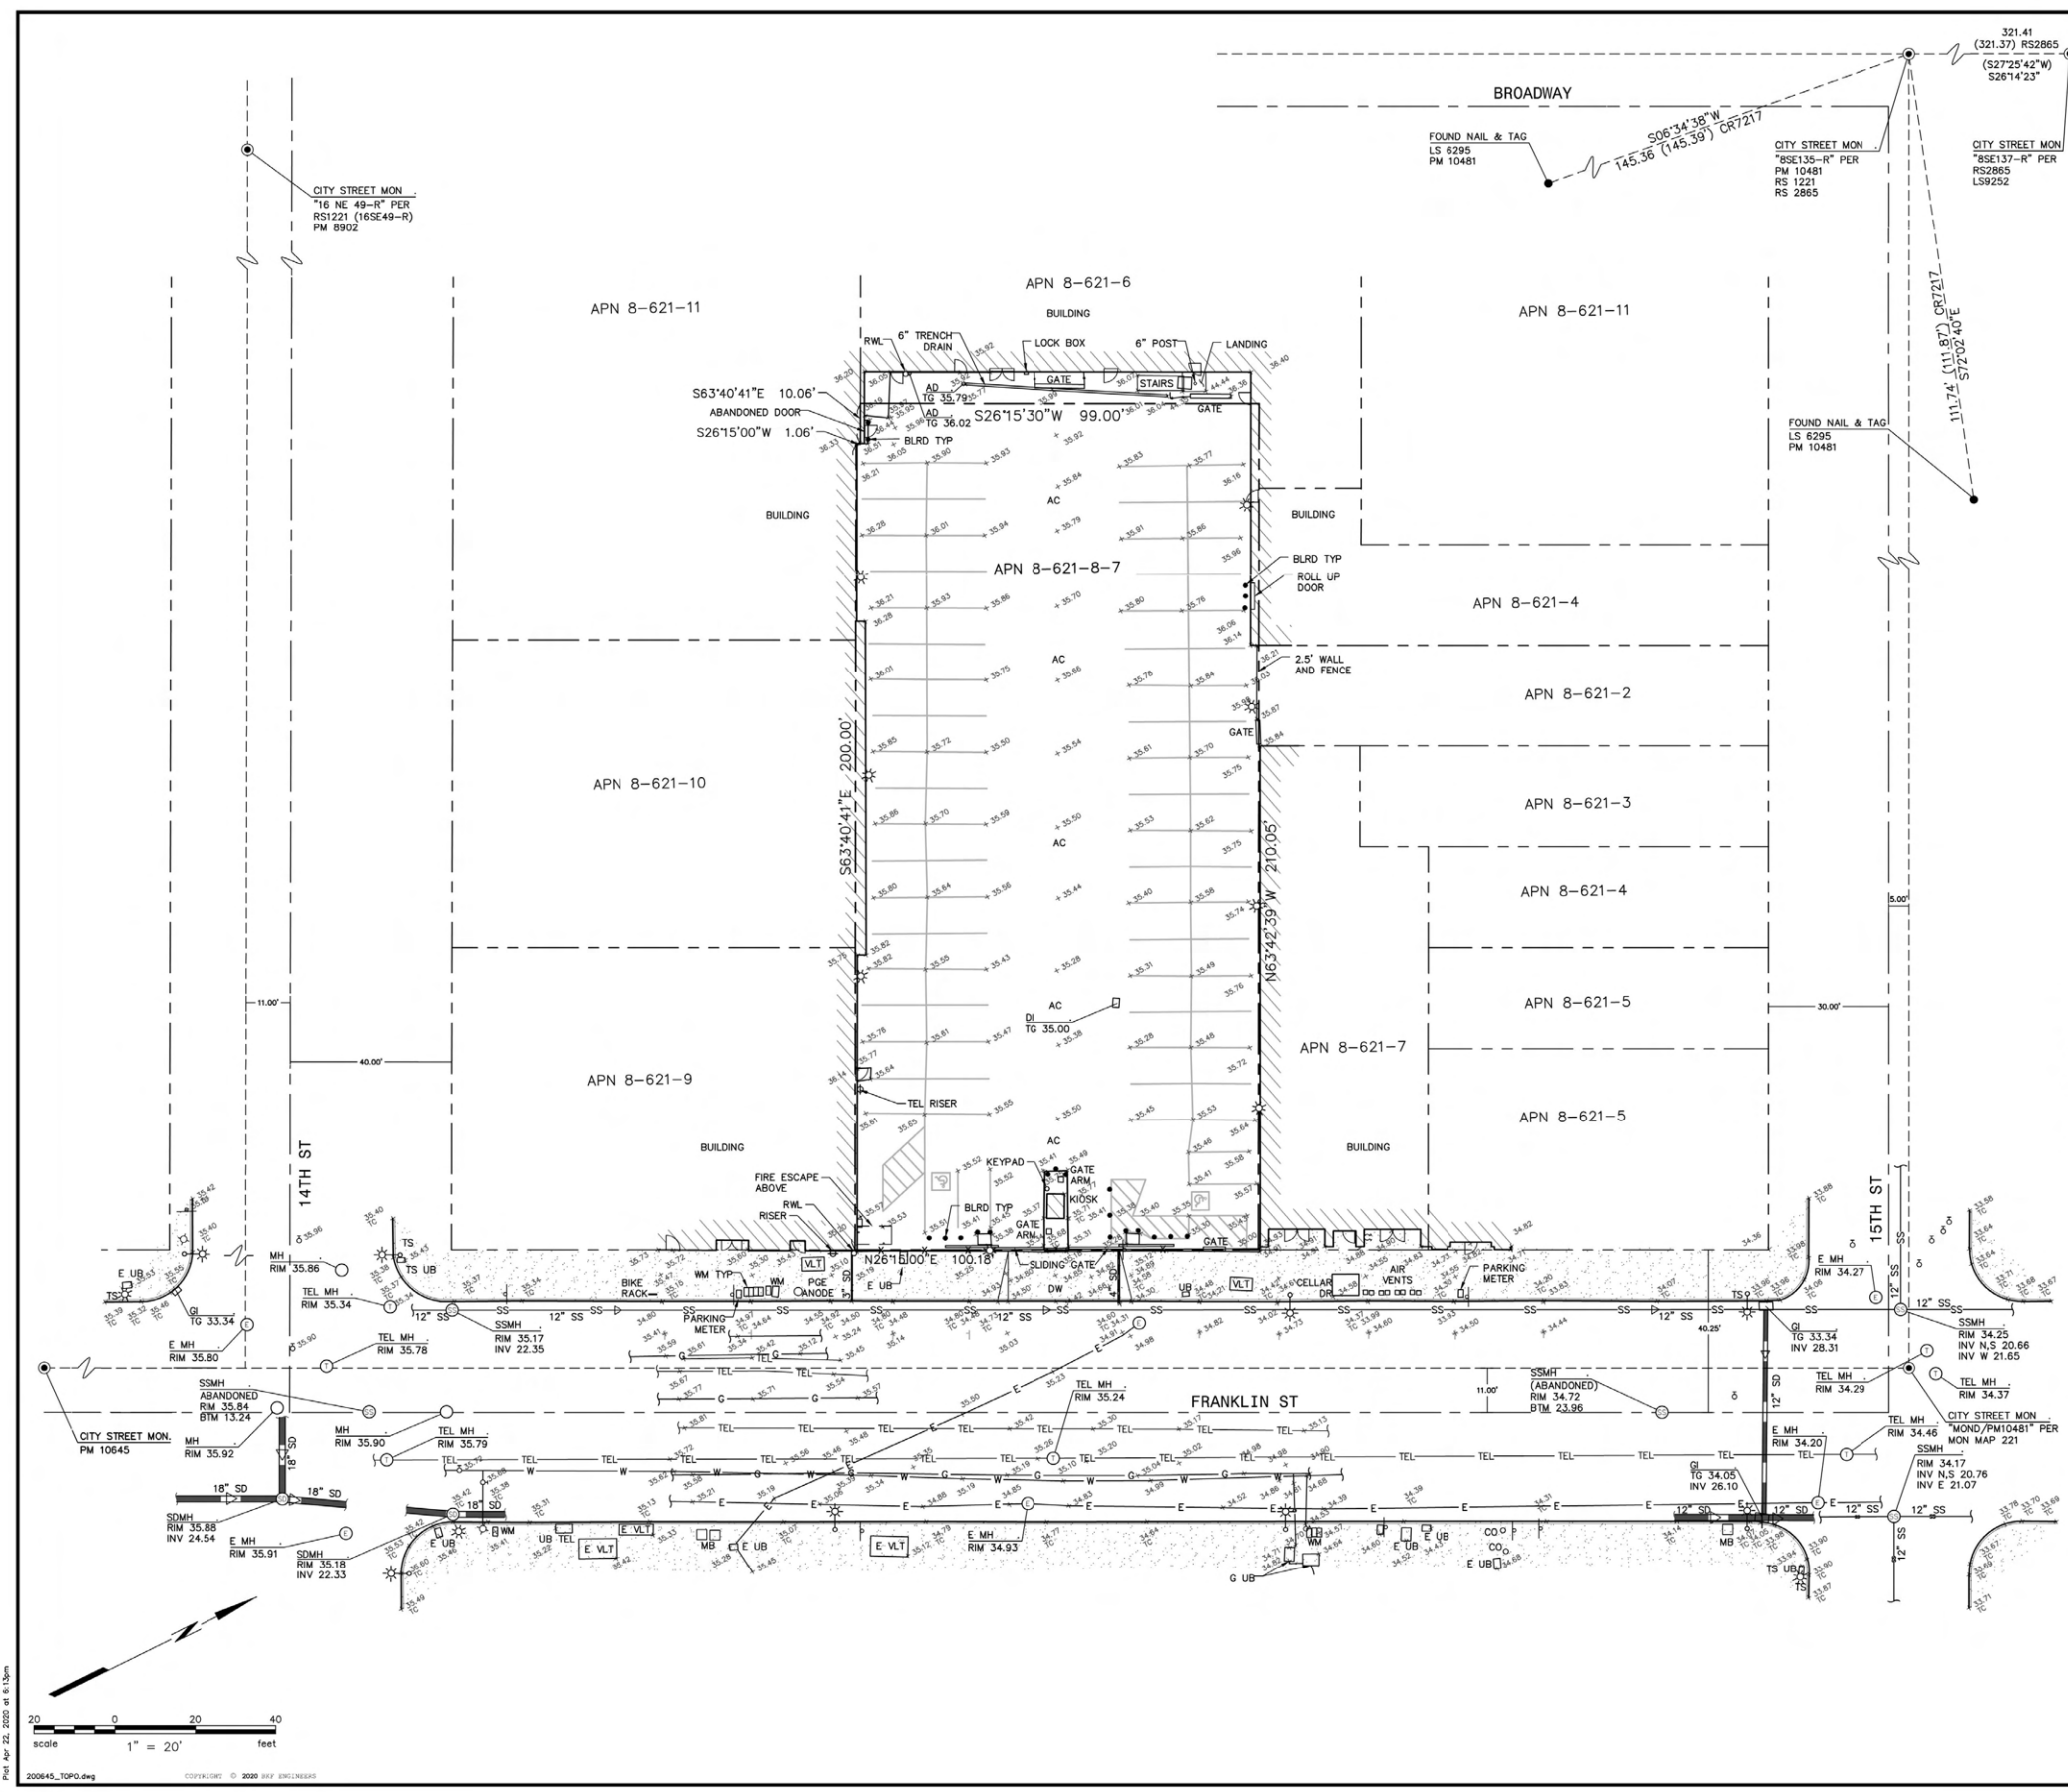

DMA SUMMARY TABLE

DMA ID	IMPERVIOUS AREA (SF)	PERVIOUS AREA (SF)	TREATMENT FLOW RATE (GPM)	NUMBER OF CARTRIDGES REQUIRED	NUMBER OF CARTRIDGES PROVIDED	BMP PROVIDED
1	20,428	546	37.9	3	3	MEDIA FILTER

STORMWATER COMPLIANCE DATA

PER THE MUNICIPAL REGIONAL STORMWATER PERMIT ORDER NO. R2-0074, TRANSIT-ORIENTED DEVELOPMENT PROJECTS ARE ELIGIBLE FOR LOW IMPACT DESIGN TREATMENT REDUCTION CREDITS. THE LID TREATMENT REDUCTION CREDIT IS THE MAXIMUM PERCENTAGE OF THE AMOUNT OF RUNOFF THAT MAY BE TREATED WITH EITHER TREE-BOX-TYPE HIGH FLOWRATE BIOFILTERS OR VAULT-BASED HIGH FLOWRATE MEDIA FILTERS. THIS PROJECT IS CLASSIFIED AS A CATEGORY C SPECIAL PROJECT (TRANSIT-ORIENTED DEVELOPMENT) AND QUALIFIES FOR A TOTAL LID TREATMENT REDUCTION CREDIT OF 100% AS DESCRIBED BELOW.

SPECIAL PROJECT CATEGORY "C"

- a. IS THE PROJECT LOCATED WITHIN A 1/4 MILE OF AN EXISTING TRANSIT HUB?
YES, THE PROJECT IS WITHIN A 1/4 MILE OF THE 12TH STREET BART STATION.
- b. IS THE PROJECT CHARACTERIZED AS A NON-AUTO-RELATED PROJECT?
YES, IS A RESIDENTIAL DEVELOPMENT.
- c. DOES THE PROJECT HAVE GREATER THAN 4.0 FAR?
YES, THE PROJECT HAS A FAR OF 20:1.

LOCATION CREDIT

50% TREATMENT REDUCTION CREDIT WITHIN A 1/2 MILE OF A TRANSIT HUB.

DENSITY CREDIT

30% TREATMENT REDUCTION CREDIT FOR A DENSITY GREATER THAN 100 DWELLING UNITS PER ACRE.

MINIMIZED SURFACE PARKING CREDIT


20% TREATMENT REDUCTION CREDIT FOR NOT HAVING SURFACE PARKING.

STORMWATER TREATMENT AREA DATA

TOTAL LID TREATMENT REDUCTION CREDIT = 100%

TOTAL IMPERVIOUS AREA = 20,428 SF

AREA ALLOWED TO BE TREATED W/ NON-LID TREATMENT MEASURES (MEDIA FILTER)
IMPERVIOUS AREA = 20,428 SF

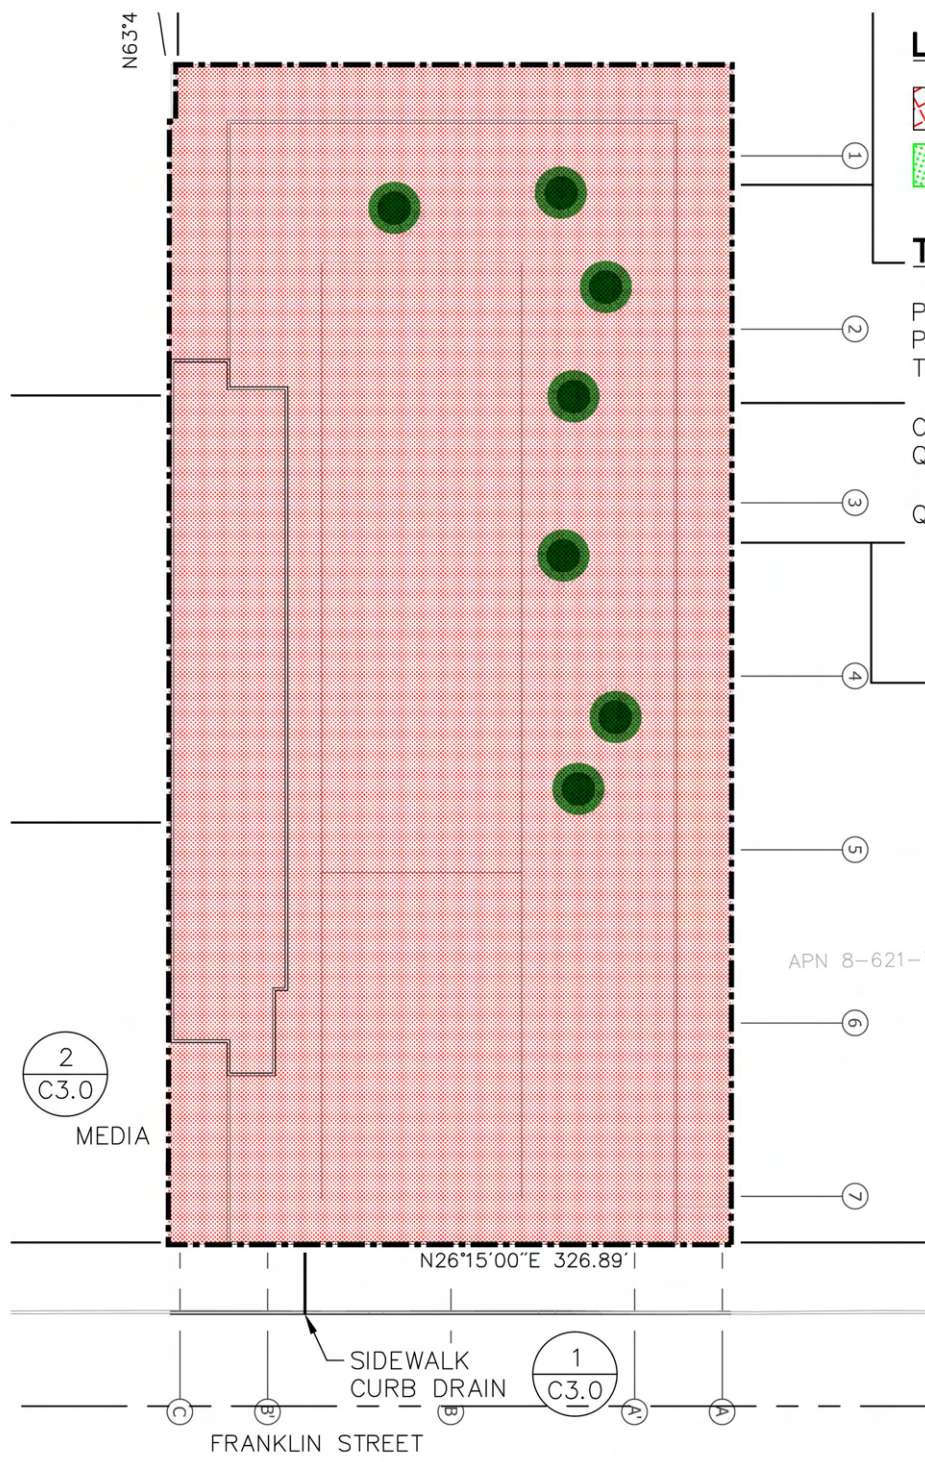

LEGEND

- ROOF OR PODIUM
- TRADITIONAL PLANTER ON PODIUM

TREATMENT FLOW CALCULATION


PROPOSED IMPERVIOUS SURFACE 20,428 SF
 PROPOSED PERVIOUS SURFACE 546 SF
 TOTAL SITE AREA 20,974 SF

$$C = (20,428 \cdot 0.9 + 546 \cdot 0.1) / 20,974 = 0.88$$

$$Q = C \cdot i \cdot A$$

$$Q = (0.88)(0.2"/hr)(0.48 \text{ AC})$$

$$Q = 0.084 \text{ CFS} = 37.9 \text{ GPM}$$

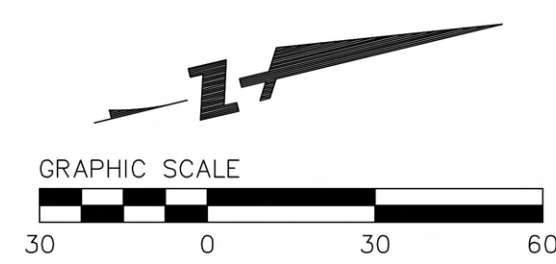

DRAWING NAME: K:\2020\200645-1431-franklin-st_oakland\eng\sd\plotted sheets\C1.0 STORMWATER CONTROL.dwg
PLOT DATE: 07-30-20 PLOTTED BY: romr

BKF 100 YEARS
 ENGINEERS · SURVEYORS · PLANNERS
 150 CALIFORNIA ST.,
 SAN FRANCISCO, CA 94111
 (415) 930-7900
 www.bkf.com

1431 FRANKLIN STREET
 PLANNING ENTITLEMENT
 PRELIMINARY STORMWATER CONTROL PLAN
 ALEMEDA COUNTY
 CITY OF OAKLAND


Date	No.	Revisions
07/20/20	1	Scale 1" = 30'
	2	Design JMW
	3	Drawn AIR
	4	Approved JMW
	5	Job No 200645

Sheet Number:
C1.0
 1 of 3

PRELIMINARY STORMWATER CONTROL PLAN

Revisions	No.	Date	By
Sheet Number:		C2.0	
2	3		

DRAWING NAME: K:\2020\200845_1431_franklin_st_oakland\ENG\SD\plotted sheets\C2.0 EROSION CONTROL PLAN.dwg
PLOT DATE: 07-30-20 PLOTTED BY: rnmr

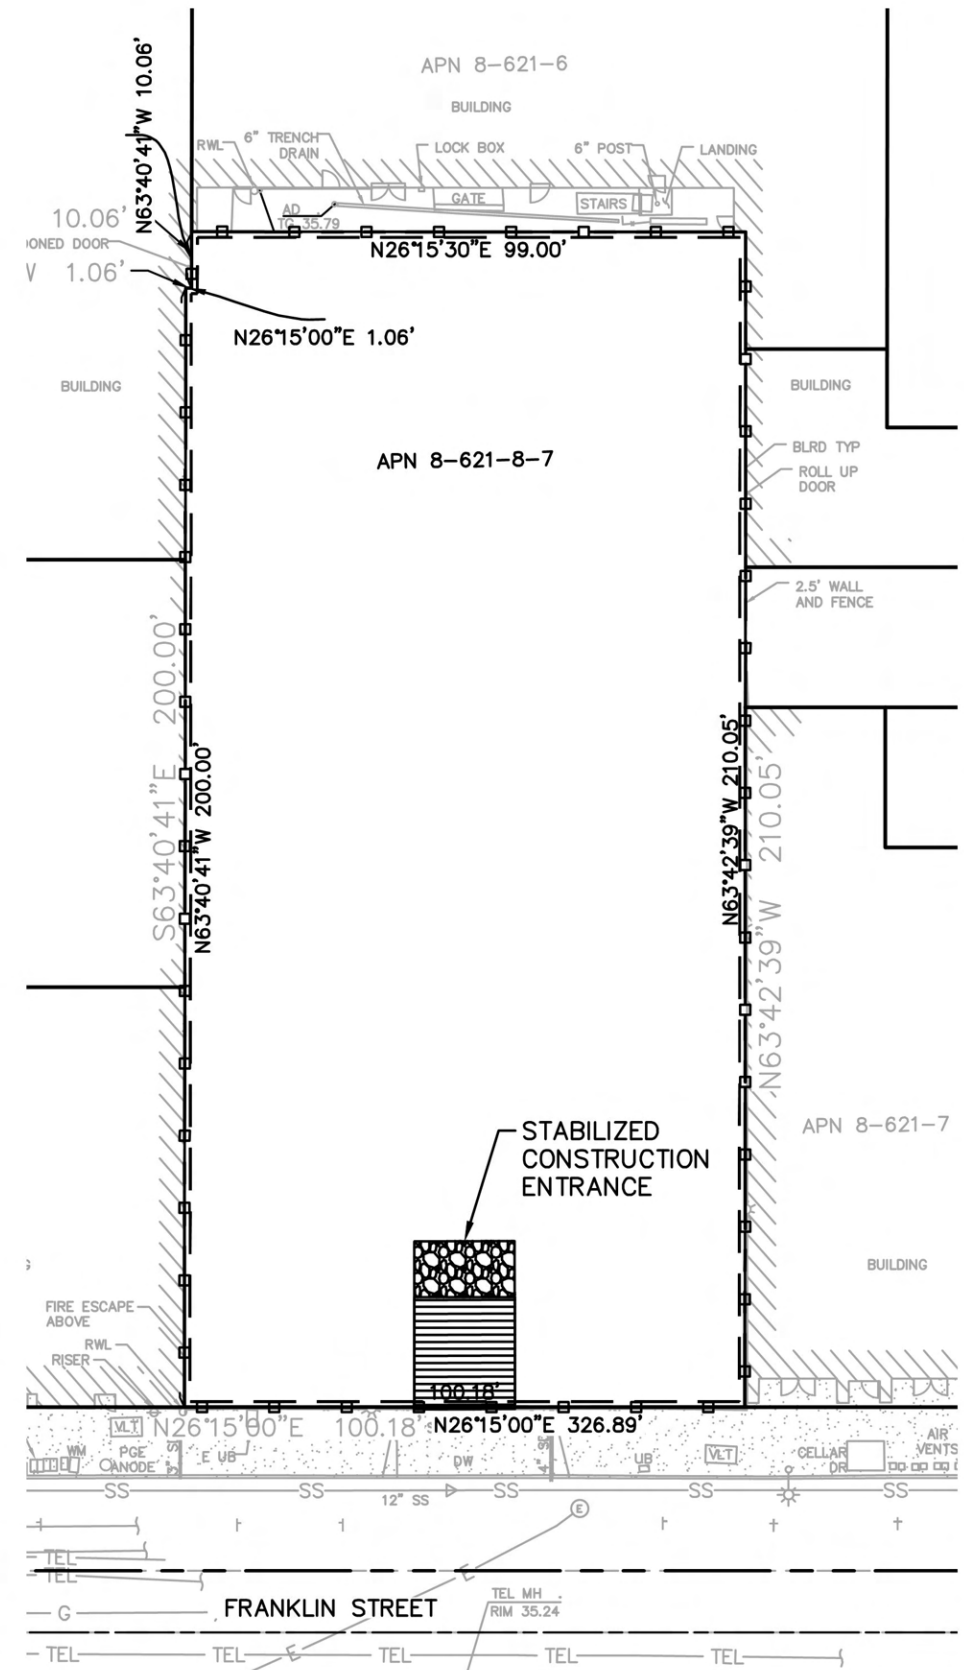

EROSION CONTROL LEGEND

- STABILIZED CONSTRUCTION ENTRANCE/EXIT
- FIBER ROLL
- CONSTRUCTION FENCE



NOTE:
EROSION CONTROL PLAN REPRESENTS INITIAL CONDITION ONLY. UPDATES TO PLAN ARE THE RESPONSIBILITY OF THE CONTRACTOR.



PRELIMINARY EROSION CONTROL PLAN

**1431 FRANKLIN STREET
PLANNING ENTITLEMENT**

DRAWING NAME: K:\2020\200845_1431_Franklin_St_Oakland\ENG\SD\plotted sheets\c3.0 DETAILS.dwg
PLOT DATE: 07-30-20 PLOTTED BY: rmmr

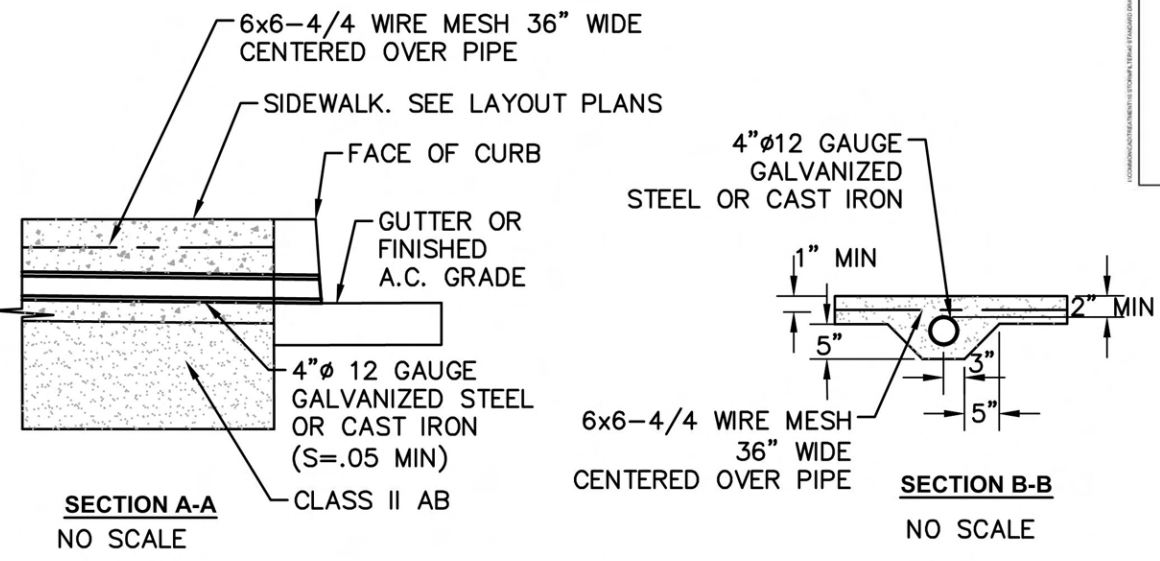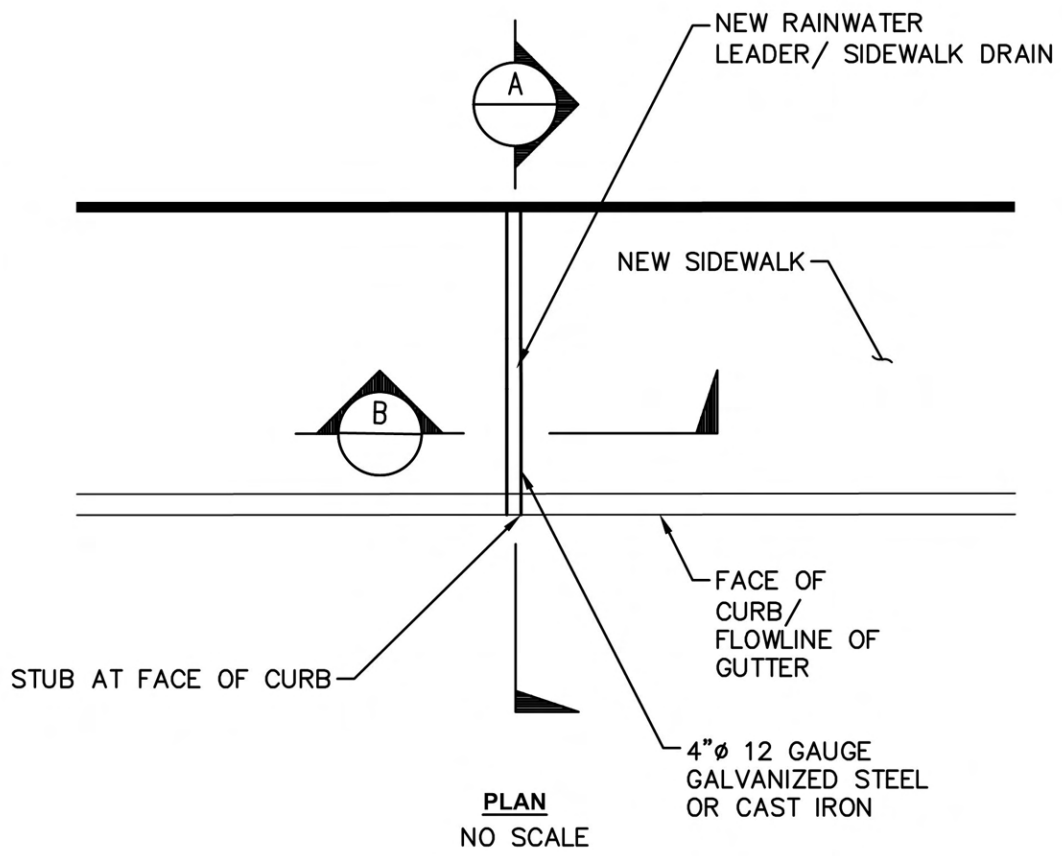

1
CURB CUT
NTS

STORMFILTER STEEL CATCHBASIN DESIGN NOTES

STORMFILTER TREATMENT CAPACITY IS A FUNCTION OF THE CARTRIDGE SELECTION AND THE NUMBER OF CARTRIDGES. 3 CARTRIDGE CATCHBASIN HAS A MAXIMUM OF THREE CARTRIDGES. SYSTEM IS SHOWN WITH A 2" CARTRIDGE, AND IS ALSO AVAILABLE WITH AN 18" CARTRIDGE. STORMFILTER CATCHBASIN CONFIGURATIONS ARE AVAILABLE WITH A DRY INLET BAY FOR VECTOR CONTROL. PEAK HYDRAULIC CAPACITY PER TABLE BELOW. IF THE SITE CONDITIONS EXCEED PEAK HYDRAULIC CAPACITY, AN UPSTREAM BYPASS STRUCTURE IS REQUIRED.

CARTRIDGE SELECTION	2"	18"
CARTRIDGE HEIGHT	3.0"	2.3"
RECOMMENDED HYDRAULIC DROP (H)	2.0"	1.5"
SPECIFIC FLOW RATE (gpm/ft ²)	2.0	2.0
CARTRIDGE FLOW RATE (gpm)	15	15
PEAK HYDRAULIC CAPACITY	1.5	1.5
INLET PERMANENT POOL LEVEL (A)	1'-0"	1'-0"
OVERALL STRUCTURE HEIGHT (B)	4'-0"	4'-0"

* 1.57 gpm/ft² SPECIFIC FLOW RATE IS APPROVED WITH PROPSORB® (PSORB) MEDIA ONLY

GENERAL NOTES:

- CONTECH TO PROVIDE ALL MATERIALS UNLESS NOTED OTHERWISE.
- FOR SITE SPECIFIC DRAWINGS WITH DETAILED STORMFILTER CATCHBASIN STRUCTURE DIMENSIONS AND WEIGHTS, PLEASE CONTACT YOUR CONTECH ENGINEERED SOLUTIONS LLC REPRESENTATIVE. www.contechES.com
- STORMFILTER CATCHBASIN WATER QUALITY STRUCTURE SHALL BE IN ACCORDANCE WITH ALL DESIGN DATA AND INFORMATION CONTAINED IN THIS DRAWING.
- INLET SHOULD NOT BE LOWER THAN OUTLET. INLET (IF APPLICABLE) AND OUTLET PIPING TO BE SPECIFIED BY ENGINEER AND PROVIDED BY CONTRACTOR.
- MANUFACTURER TO APPLY A SURFACE BEAD WELD IN THE SHAPE OF THE LETTER 'O' ABOVE THE OUTLET PIPE STUB ON THE EXTERIOR SURFACE OF THE STEEL SFCB.
- STORMFILTER CATCHBASIN EQUIPPED WITH 4 INCH (APPROXIMATE) LONG STUBS FOR INLET (IF APPLICABLE) AND OUTLET PIPING. STANDARD OUTLET STUB IS 8 INCHES IN DIAMETER. MAXIMUM OUTLET STUB IS 15 INCHES IN DIAMETER. CONNECTION TO COLLECTION PIPING CAN BE MADE USING FLEXIBLE COUPLING BY CONTRACTOR.
- STEEL STRUCTURE TO BE MANUFACTURED OF 1/4 INCH STEEL PLATE. CASTINGS SHALL MEET AASHTO M306 LOAD RATING. TO MEET HSD LOAD RATING ON STRUCTURE, A CONCRETE COLLAR IS REQUIRED. WHEN REQUIRED, CONCRETE COLLAR WITH #4 REINFORCING BARS TO BE PROVIDED BY CONTRACTOR.
- FILTER CARTRIDGES SHALL BE MEDIA FILLED, PASSIVE, SIPHON ACTUATED, RADIAL FLOW, AND SELF CLEANING. RADIAL MEDIA DEPTH SHALL BE 7-INCHES. FILTER MEDIA CONTACT TIME SHALL BE AT LEAST 38 SECONDS.
- SPECIFIC FLOW RATE IS EQUAL TO THE FILTER TREATMENT CAPACITY (gpm) DIVIDED BY THE FILTER CONTACT SURFACE AREA (sq ft).

INSTALLATION NOTES:

- INLET SUB BASE, BACKFILL DEPTH, AND/OR ANTI-FLOTATION PROVISIONS ARE SITE-SPECIFIC DESIGN CONSIDERATIONS AND SHALL BE SPECIFIED BY ENGINEER OF RECORD.
- CONTRACTOR TO PROVIDE EQUIPMENT WITH SUFFICIENT LIFTING AND REACH CAPACITY TO LIFT AND SET THE CATCHBASIN (LIFTING CLUTCHES PROVIDED).
- CONTRACTOR TO TAKE APPROPRIATE MEASURES TO PROTECT CARTRIDGES FROM CONSTRUCTION RELATED EROSION RUNOFF.

STRUCTURE ID	XXX
WATER QUALITY FLOW RATE (cfs)	X.XX
PEAK FLOW RATE (cfs)	X.XX
RETURN PERIOD OF PEAK FLOW (yrs)	XXX
CARTRIDGE FLOW RATE (gpm)	XX
MEDIA TYPE (PERLITE, ZPG, PSORB)	XXXXX
ISM ELEVATION	XXXX.XX
PIPE DATA:	1E DIAMETER
INLET STUB	XXX'X' XX"
OUTLET STUB	XXX'X' XX"
CONFIGURATION	
OUTLET	OUTLET
INLET	INLET
SLOPED LID	YES/NO
SOLID COVER	YES/NO
NOTES/SPECIAL REQUIREMENTS:	

CONTECH ENGINEERED SOLUTIONS LLC
8025 Centre Pointe Dr., Suite 400, West Chester, OH 45380
936-526-3899 513-645-7000 513-645-7983 FAX

3 CARTRIDGE CATCHBASIN STORMFILTER STANDARD DETAIL

2
STORMFILTER
NTS

Revisions	No.	Date	By	Check	Drawn	Approved	Job No.

Sheet Number:
C3.0
1 of 3



LEED v4 for Core and Shell Development

Project Name: 1431 Franklin Office
Date: July 28, 2020
Certification Level: Silver



1	0	0	0
Y	?Y	?N	N
1			

IP - Integrative Process Possible Points: 1

d	1	Integrative Process	1
---	---	---------------------	---

18	0	1	1
Y	?Y	?N	N
			20
2			
2			1
6			
6			
		1	
1			
1			

LT - Location and Transportation Possible Points: 20

d	1	LEED for Neighborhood Development Location	20
d	2	Sensitive Land Protection	2
d	3	High Priority Site	2 to 3
d	4	Surrounding Density and Diverse Uses	2 to 6
d	5	Access to Quality Transit	1 to 6
d	6	Bicycle Facilities	1
d	7	Reduced Parking Footprint	1
d	8	Green Vehicles	1

5	0	1	5
Y	?Y	?N	N
Y			
1			
		1	1
			1
			3
2			
1			
1			

SS - Sustainable Sites Possible Points: 11

c	Prereq 1	Construction Activity Pollution Prevention	
d	1	Site Assessment	1
d	2	Site Development - Protect or Restore Habitat	1 to 2
d	3	Open Space	1
d	4	Rainwater Management	2 to 3
d	5	Heat Island Reduction	1 to 2
c	6	Light Pollution Reduction	1
d	7	Tenant Design and Construction Guidelines	1

5	2	2	2
Y	?Y	?N	N
Y			
Y			
1	1		1
3		1	1
1		1	
	1		

WE - Water Efficiency Possible Points: 11

d	Prereq 1	Outdoor Water Use Reduction	
d	Prereq 2	Indoor Water Use Reduction	
d	Prereq 3	Building-Level Metering	
d	1	Outdoor Water Use Reduction (v4.1 credit)	1 to 3
d	2	Indoor Water Use Reduction	1 to 6
d	3	Cooling Tower Water Use	1 to 2
d	4	Water Metering	1

12	5	3	13
Y	?Y	?N	N
Y			
Y			
Y			
3		1	2

EA - Energy and Atmosphere Possible Points: 33

c	Prereq 1	Fundamental Commissioning and Verification	
d	Prereq 2	Minimum Energy Performance	
d	Prereq 3	Building-Level Energy Metering	
d	Prereq 4	Fundamental Refrigerant Management	
c	1	Enhanced Commissioning	2 to 6

8	2	2	6
	1		
			2
			3
1			
	2		

EA - Energy and Atmosphere (cont.) Possible Points: 33

d	2	Optimize Energy Performance (17%)	1 to 18
d	3	Advanced Energy Metering	1
c	4	Demand Response	1 to 2
d	5	Renewable Energy Production	1 to 3
d	6	Enhanced Refrigerant Management	1
c	7	Green Power and Carbon Offsets	1 to 2

4	1	3	6
Y	?Y	?N	N
Y			
Y			
		3	3
1			1
	1		1
1			1
2			

MR - Materials and Resources Possible Points: 14

d	Prereq 1	Storage and Collection of Recyclables	
c	Prereq 2	Construction Waste Management	
c	1	Building Life-Cycle Impact Reduction	2 to 6
c	2	BPDO - Environmental Product Declarations (v4.1)	1 to 2
c	3	BPDO - Sourcing Raw Materials (v4.1)	1 to 2
c	4	BPDO - Material Ingredients (v4.1)	1 to 2
c	5	Construction Waste Management	1 to 2

3	0	2	5
Y	?Y	?N	N
Y			
Y			
		1	1
2		1	
1			
			3
			1

Indoor Environmental Quality Possible Points: 10

d	Prereq 1	Minimum Indoor Air Quality Performance	
d	Prereq 2	Environmental Tobacco Smoke (ETS) Control	
d	1	Enhanced Indoor Air Quality Strategies	1 to 2
c	2	Low-Emitting Materials	1 to 3
c	3	Construction IAQ Management Plan	1
d	4	Daylight	1 to 3
d	5	Quality Views	1

2	2	2	0
Y	?Y	?N	N
	1		
		1	
	1		
1			
		1	
1			

Innovation and Design Process Possible Points: 6

	1.1	Innovation in Design	1
	1.2	Innovation in Design	1
	1.3	Pilot Credit	1
	1.4	Exemplary Performance: Reduced Parking Footprint	1
	1.5	Exemplary Performance	1
c	2	LEED Accredited Professional	1

1	2	1	0
Y	?Y	?N	N
1			
	1		
		1	
	1		

Regional Priority Credits Possible Points: 4

	1.1	Access to Quality Transit (5 points)	1
	1.2	Optimize Energy Performance (10 points)	1
	1.3	Building Lifecycle Impact Reduction (3 points)	1
	1.4	BPDO Sourcing of Raw Materials (1 point)	1

51	12	15	32
----	----	----	----

Total Possible Points: 110
Certified 40 to 49 points Silver 50 to 59 points Gold 60 to 79 points Platinum 80 to 110 points

Alternates: Rainwater Management (3 points), Indoor Water Use Reduction (4 points)

CHECKLIST

CHAPTER 3 GREEN BUILDING SECTION 301 GENERAL 301.1 SCOPE. Buildings shall be designed to include the green building measures specified as mandatory in the application checklists contained in this code.

301.3 NONRESIDENTIAL ADDITIONS AND ALTERATIONS. [BSC-CG] The provisions of individual sections of Chapter 5 apply to newly constructed buildings, building additions of 1,000 square feet or greater, and/or building alterations with a permit valuation of \$200,000 or above.

301.4 PUBLIC SCHOOLS AND COMMUNITY COLLEGES. (see GBSC) 301.5 HEALTH FACILITIES. (see GBSC) SECTION 302 MIXED OCCUPANCY BUILDINGS 302.1 MIXED OCCUPANCY BUILDINGS. In mixed occupancy buildings, each portion of a building shall comply with the specific green building measures applicable to each specific occupancy.

SECTION 303 PHASED PROJECTS 303.1 PHASED PROJECTS. For shell buildings and others constructed for future tenant improvements, only those code measures relevant to the building components and systems considered to be new construction (or newly constructed) shall apply.

303.1.1 Initial Tenant Improvements. The provisions of this code shall apply only to the initial tenant improvements to a project. Subsequent tenant improvements shall comply with the scoping provisions in Section 301.3 non-residential additions and alterations.

ABBREVIATION DEFINITIONS: HCD Department of Housing and Community Development BSC California Building Standards Commission DSA-SS Division of the State Architect, Structural Safety OSHPD Office of Statewide Health Planning and Development LR Low Rise HR High Rise AA Additions and Alterations AN New

CHAPTER 5 NONRESIDENTIAL MANDATORY MEASURES DIVISION 5.1 PLANNING AND DESIGN SECTION 5.101 GENERAL 5.101.1 SCOPE. The provisions of this chapter outline planning, design and development methods that include environmentally sensitive site selection, building design, building siting and development to protect, restore and enhance the environmental quality of the site and respect the integrity of adjacent properties.

SECTION 5.102 DEFINITIONS 5.102.1 DEFINITIONS The following terms are defined in Chapter 2 (and are included here for reference) CUTOFF LUMINAIRES. Luminaires whose light distribution is such that the candela per 1000 lumens does not numerically exceed 25 (2.5 percent) at an angle of 80 degrees above nadir, and 100 (10 percent) at a vertical angle of 80 degrees above nadir. This applies to all lateral angles around the luminaire.

LOW-EMITTING AND FUEL EFFICIENT VEHICLES. Eligible vehicles are limited to the following: 1. Zero emission vehicle (ZEV), including neighborhood electric vehicles (NEV), partial zero emission vehicle (PZEV), advanced technology PZEV (AT ZEV) or CNG fueled (original equipment manufacturer only) regulated under Health and Safety Code section 43800 and CCR, Title 13, Sections 1961 and 1962. 2. High-efficiency vehicles, regulated by U.S. EPA, bearing High-Occupancy Vehicle (HOV) car pool lane stickers issued by the Department of Motor Vehicles.

NEIGHBORHOOD ELECTRIC VEHICLE (NEV). A motor vehicle that meets the definition of "low-speed vehicle" either in Section 385.5 of the Vehicle Code or in 49CFR571.1500 (as it existed on July 1, 2000), and is certified to zero-emission vehicle standards.

TENANT-OCCUPANTS. Building occupants who inhabit a building during its normal hours of operation as permanent occupants, such as employees, as distinguished from customers and other transient visitors.

VANPOOL VEHICLE. Eligible vehicles are limited to any motor vehicle, other than a motortruck or truck tractor, designed for carrying more than 10 but not more than 15 persons including the driver, which is maintained and used primarily for the nonprofit work-related transportation of adults for the purpose of ridesharing.

NOTE: Source: Vehicle Code, Division 1, Section 668 ZEV. Any vehicle certified to zero-emission standards.

SECTION 5.106 SITE DEVELOPMENT 5.106.1 STORM WATER POLLUTION PREVENTION FOR PROJECTS THAT DISTURB LESS THAN ONE ACRE OF LAND. Newly constructed projects and additions which disturb less than one acre of land, and are not part of a larger common plan of development or sale, shall prevent the pollution of storm water runoff from the construction activities through one or more of the following measures:

- 5.106.1.1 Local ordinance. Comply with a lawfully enacted storm water management and/or erosion control ordinance. 5.106.1.2 Best Management Practices (BMPs). Prevent the loss of soil through wind or water erosion by implementing an effective combination of erosion and sediment control and good housekeeping BMPs. 1. Soil loss BMPs that should be considered for implementation as appropriate for each project include, but are not limited to, the following: a. Scheduling construction activity during dry weather, when possible. b. Preservation of natural features, vegetation, soil, and buffers around surface waters. c. Drainage swales or lined ditches to control stormwater flow. d. Mulching or hydroseeding to stabilize disturbed soils. e. Erosion control to protect slopes. f. Protection of storm drain inlets (gravel bags or catch basin inserts). g. Perimeter sediment control (perimeter silt fence, fiber rolls). h. Sediment trap or sediment basin to retain sediment on site. i. Stabilized construction exits. j. Wind erosion control. k. Other soil loss BMPs acceptable to the enforcing agency. 2. Good housekeeping BMPs to manage construction equipment, materials, non-stormwater discharges and wastes that should be considered for implementation as appropriate for each project include, but are not limited to, the following: a. Demustering activities. b. Material handling and waste management. c. Building materials stockpile management. d. Management of washout areas (concrete, paint, sludge, etc.). e. Control of vehicle/equipment fueling to contractor's staging area. f. Vehicle and equipment cleaning performed off site. g. Spill prevention and control. h. Other housekeeping BMPs acceptable to the enforcing agency.

5.106.2 STORMWATER POLLUTION PREVENTION FOR PROJECTS THAT DISTURB ONE OR MORE ACRES OF LAND. Comply with all lawfully enacted stormwater discharge regulations for projects that (1) disturb one acre or more of land, or (2) disturb less than one acre of land but are part of a larger common plan of development sale. Note: Projects that (1) disturb one acre or more of land, or (2) disturb less than one acre of land but are part of the larger common plan of development or sale must comply with the post-construction requirements detailed in the applicable National Pollutant Discharge Elimination System (NPDES) General permit for Stormwater Discharges Associated with Construction and Land Disturbance Activities issued by the State Water Resources Control Board or the Lahontan Regional Water Quality Control Board (for projects in the Lake Tahoe Hydrologic Unit). The NPDES permits require postconstruction runoff (post-project hydrology) to match the preconstruction runoff (pre-project hydrology) with the installation of postconstruction stormwater management measures. The NPDES permits emphasize runoff reduction through on-site stormwater use, interception, evapotranspiration, and infiltration through nonstructural controls, such as Low Impact Development (LID) practices, and conversion design measures. Stormwater volume that cannot be addressed using nonstructural practices is required to be captured in structural practices and be approved by the enforcing agency. Refer to the current applicable permits on the State Water Resources Control Board website at: www.waterboards.ca.gov/construction/stormwater. Consideration to the stormwater runoff management measures should be given during the initial design process for appropriate integration into site development.

5.106.4 BICYCLE PARKING. For buildings within the authority of California Building Standards Commission as specified in Section 103, comply with Section 5.106.4.1. For buildings within the authority of the Division of the State Architect pursuant to Section 105, comply with Section 5.106.4.2

5.106.4.1 Bicycle parking. [BSC-CG] Comply with Sections 5.106.4.1.1 and 5.106.4.1.2; or meet the applicable local ordinance, whichever is stricter. 5.106.4.1.1 Short-term bicycle parking. If the new project or an addition or alteration is anticipated to generate visitor traffic, provide permanently anchored bicycle racks within 200 feet of the visitors' entrance, readily visible to passers-by, for 5% of new visitor motorized vehicle parking spaces being added, with a minimum of one two-bike capacity rack. Exception: Additions or alterations which add nine or less visitor vehicular parking spaces.

5.106.4.1.2 Long-term bicycle parking. For new buildings with tenant spaces that have 10 or more tenant-occupants, provide secure bicycle parking for 5 percent of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility. 5.106.4.1.3 For additions or alterations that add 10 or more tenant-occupant vehicular parking spaces, provide secure bicycle parking for 5 percent of the tenant-occupant vehicular parking spaces being added, with a minimum of one bicycle parking facility.

5.106.4.1.4 For new shell buildings in phased projects provide secure bicycle parking for 5 percent of the anticipated tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility. 5.106.4.1.5 Acceptable bicycle parking facility for Sections 5.106.4.1.2, 5.106.4.1.3, and 5.106.4.1.4 shall be convenient from the street and shall meet one of the following: 1. Covered, lockable enclosures with permanently anchored racks for bicycles; 2. Lockable bicycle rooms with permanently anchored racks; or 3. Lockable, permanently anchored bicycle lockers.

Note: Additional information on recommended bicycle accommodations may be obtained from Sacramento Area Bicycle Advocates. 5.106.4.2 Bicycle parking. [DSA-SS] For public schools and community colleges, comply with Sections 5.106.4.2.1 and 5.106.4.2.2

5.106.4.2.1 Student bicycle parking. Provide permanently anchored bicycle racks conveniently accessible to a minimum of four two-bike capacity racks per new building. 5.106.4.2.2 Staff bicycle parking. Provide permanent, secure bicycle parking conveniently accessed with a minimum of two staff bicycle parking spaces per new building. Acceptable bicycle parking facilities shall be convenient from the street or staff parking area and shall meet one of the following: 1. Covered, lockable enclosures with permanently anchored racks for bicycles; 2. Lockable bicycle rooms with permanently anchored racks; or 3. Lockable, permanently anchored bicycle lockers.

5.106.5.2 DESIGNATED PARKING FOR CLEAN AIR VEHICLES. In new projects or additions or alterations that add 10 or more vehicular parking spaces, provide designated parking for any combination of low-emitting, fuel-efficient and carpool/van pool vehicles as follows:

TABLE 5.106.5.2 - PARKING

TOTAL NUMBER OF PARKING SPACES	NUMBER OF REQUIRED SPACES
0-9	0
10-25	1
25-50	3
51-75	6
76-100	8
101-150	11
151-200	16
201 AND OVER	AT LEAST 8% OF TOTAL

5.106.5.2.1 - Parking stall marking. Paint. In the paint used for stall striping, the following characters such that the lower edge of the last word aligns with the end of the stall striping and is visible beneath a parked vehicle: CLEAN AIR / VAN POOL / EV

Note: Vehicles bearing Clean Air Vehicle stickers from expired HOV lane programs may be considered eligible for designated parking spaces. 5.106.5.3 Electric vehicle (EV) charging. [N] Construction shall comply with Section 5.106.5.3.1 or Section 5.106.5.3.2 to facilitate future installation of electric vehicle supply equipment (EVSE). When EVSE(s) is/are installed, it shall be in accordance with the California Building Code, the California Electrical Code and as follows:

5.106.5.3.1 Single charging space requirements. [N] When only a single charging space is required per Table 5.106.5.3.3, a raceway is required to be installed at the time of construction and shall be installed in accordance with the California Electrical Code. Construction plans and specifications shall include, but are not limited to, the following: 1. The type and location of the EVSE. 2. A listed raceway capable of accommodating a 208/240-volt dedicated branch circuit. 3. The raceway shall not be less than trade size 1". 4. The raceway shall originate at a service panel or a subpanel serving the area, and shall terminate in close proximity to the proposed location of the charging equipment and listed suitable cabinet, box, enclosure or equivalent. 5. The service panel or subpanel shall have sufficient capacity to accommodate a minimum 40-ampere dedicated branch circuit for the future installation of the EVSE.

5.106.5.3.2 Multiple charging space requirements. [N] When multiple charging spaces are required per Table 5.106.5.3.3, a raceway is required to be installed at the time of construction and shall be installed in accordance with the California Electrical Code. Construction plans and specifications shall include, but are not limited to, the following: 1. The type and location of the EVSE. 2. The raceway(s) shall originate at a service panel or a subpanel(s) serving the area, and shall terminate in close proximity to the proposed location of the charging equipment and into listed suitable cabinet(s), box(es), enclosure(s) or equivalent. 3. Plan design shall be based upon 40-ampere minimum branch circuits. 4. Electrical calculations shall substantiate the design of the electrical system, to include the rating of equipment and any on-site distribution transformers and have sufficient capacity to simultaneously charge all required EVs at its full rated amperage. 5. The service panel or subpanel(s) shall have sufficient capacity to accommodate the required number of dedicated branch circuit(s) for the future installation of the EVSE.

5.106.5.3.3 EV charging space calculations. [N] Table 5.106.5.3.3 shall be used to determine if single or multiple charging space requirements apply for the future installation of EVSE. Exceptions: On a case-by-case basis where the local enforcing agency has determined EV charging and infrastructure is not feasible based upon one or more of the following conditions:

1. Where there is insufficient electrical supply. 2. Where there is evidence suitable to the local enforcing agency substantiating that additional local utility infrastructure design requirements, directly related to the implementation of Section 5.106.5.3, may adversely impact the construction cost of the project.

TABLE 5.106.5.3.3

TOTAL NUMBER OF PARKING SPACES	NUMBER OF REQUIRED SPACES
0-9	0
10-25	1
26-50	2
51-75	4
76-100	5
101-150	7
151-200	10
201 AND OVER	6% of total ¹

1. Calculation for spaces shall be rounded up to the nearest whole number. 5.106.5.3.4 [N] Identification. The service panel or subpanel(s) circuit directory shall identify the reserved overcurrent protective device space(s) for future EV charging as "EV CAPABLE". The raceway termination location shall be permanently and visibly marked as "EV CAPABLE". 5.106.5.3.5 [N] Future charging spaces qualify as designated parking as described in Section 5.106.5.2. Designated parking for clean air vehicles.

5.106.8 LIGHT POLLUTION REDUCTION. [N] Outdoor lighting systems shall be designed and installed to comply with the following: 1. The minimum requirements in the California Energy Code for Lighting Zones 0-4 as defined in Chapter 10, Section 10-11.4 of the California Administrative Code; and 2. Backlight (B) ratings as defined in IES TM-15-11 (shown in Table A-1 in Chapter 8); 3. Uplight and Glare ratings as defined in California Energy Code (shown in Tables 130.2-A and 130.2-B in Chapter 8) and 4. Allowable BUG ratings not exceeding those shown in Table 5.106.8, [N] or Comply with a local ordinance lawfully enacted pursuant to Section 101.7, whichever is more stringent.

Exceptions: [N] 1. Luminaires that qualify as exceptions in Section 140.7 of the California Energy Code. 2. Emergency lighting. 3. Building facade meeting the requirements in Table 140.7-B of the California Energy Code, Part 6. 4. Custom lighting features as allowed by the local enforcing agency, as permitted by Section 101.8 Alternate materials, designs and methods of construction.

Note: [N] 1. See also California Building Code, Chapter 12, Section 1205.6 for college campus lighting requirements for parking facilities and walkways. 2. Refer to Chapter 8 (Compliance Forms, Worksheets and Reference Material) for IES TM-15-11 Table A-1, California Energy Code Tables 130.2-A and 130.2-B. 3. Refer to the California Building Code for requirements for additions and alterations.

TABLE 5.106.8 [N] MAXIMUM ALLOWABLE BACKLIGHT, UPLIGHT AND GLARE (BUG) RATINGS

ALLOWABLE RATING	LIGHTING ZONE				
	LZ0	LZ1	LZ2	LZ3	LZ4
MAXIMUM ALLOWABLE BACKLIGHT RATING					
Luminaire greater than 2 mounting heights (MH) from property line	N/A	No Limit	No Limit	No Limit	No Limit
Luminaire back hemisphere is 1-2 MH from property line	N/A	B2	B3	B4	B4
Luminaire back hemisphere is 0.5-1 MH from property line	N/A	B1	B2	B3	B3
Luminaire back hemisphere is less than 0.5 MH from property line	N/A	B0	B0	B1	B2
MAXIMUM ALLOWABLE UPLIGHT RATING (U)					
For area lighting	N/A	U0	U0	U0	U0
For all other outdoor lighting including decorative luminaires	N/A	U1	U2	U3	UR
MAXIMUM ALLOWABLE GLARE RATING (G)					
Luminaire greater than 2 MH from property line	N/A	G1	G2	G3	G4
Luminaire front hemisphere is 1-2 MH from property line	N/A	G0	G1	G1	G2
Luminaire front hemisphere is 0.5-1 MH from property line	N/A	G0	G0	G1	G1
Luminaire back hemisphere is less than 0.5 MH from property line	N/A	G0	G0	G0	G1

1. IESNA Lighting Zones 0 and 5 are not applicable; refer to Lighting Zones as defined in the California Energy Code and Chapter 10 of the California Administrative Code. 2. For property lines that abut public walkways, bikeways, plazas and parking lots, the property line may be considered to be 5 feet beyond the actual property line for purpose of determining compliance with this section. For property lines that abut public roadways and public transit corridors, the property line may be considered to be the centerline of the public roadway or public transit corridor for the purpose of determining compliance with this section. 3. If the nearest property line is less than or equal to two mounting heights from the back hemisphere of the luminaire distribution, the applicable reduced Backlight rating shall be met. 4. General lighting luminaires in areas such as outdoor parking, sales or storage lots shall meet these reduced ratings. Decorative luminaires located in these areas shall meet U-Value limits for "all other outdoor lighting". 5. If the nearest property line is less than or equal to two mounting heights from the front hemisphere of the luminaire distribution, the applicable reduced Glare rating shall be met.

5.106.10 GRADING AND PAVING. Construction plans shall indicate how site grading or a drainage system will include all surface water flows to keep water from entering buildings. Examples of methods to manage surface water include, but are not limited to, the following: 1. Swales. 2. Water collection and disposal systems. 3. French drains. 4. Water retention gardens. 5. Other water measures which keep surface water away from buildings and aid in groundwater recharge. Exception: Additions and alterations not altering the drainage path.

5.106.12 SHADE TREES [DSA-SS]. Shade Trees shall be planted to comply with Sections 5.106.12.1, 5.106.12.2, and 5.106.12.3. Percentages shown shall be measured at noon on the summer solstice. Landscape irrigation necessary to establish and maintain tree health shall comply with Section 5.304.6. 5.106.12.1 Surface parking areas. Shade tree plantings, minimum #10 container size or equal, shall be installed to provide shade over 50 percent of the parking area within 15 years. Exceptions: The surface parking area covered by solar photovoltaic shade structures, or shade structures, with roofing materials that comply with Table A5.106.11.2.2 in Appendix A5, are not included in the total area calculations. 5.106.12.2 Landscape areas. Shade tree plantings, minimum #10 container size or equal shall be installed to provide shade of 20% of the landscape area within 15 years. Exceptions: Playfields for organized sport activity are not included in the total area calculation. 5.106.12.3 Hardscape areas. Shade tree plantings, minimum #10 container size or equal shall be installed to provide shade over 20 percent of the hardscape area within 15 years. Exceptions: Walks, hardscape areas covered by solar photovoltaic shade structures, and hardscape areas covered by shade structures with roofing materials that comply with Table A5.106.11.2.2 in Appendix A5, are not included in the total area calculation.

DIVISION 5.2 ENERGY EFFICIENCY SECTION 5.201 GENERAL 5.201.1 Scope. [BSC-CG] California Energy Code [DSA-SS]. For the purposes of mandatory energy efficiency standards in this code, the California Energy Commission will continue to adopt mandatory building standards. DIVISION 5.3 WATER EFFICIENCY AND CONSERVATION SECTION 5.301 GENERAL 5.301.1 Scope. The provisions of this chapter shall establish the means of conserving water use indoors, outdoors and in wastewater conveyance. SECTION 5.302 DEFINITIONS 5.302.1 Definitions. The following terms are defined in Chapter 2 (and are included here for reference) EVAPOTRANSPIRATION ADJUSTMENT FACTOR (ETA) [DSA-SS]. An adjustment factor when applied to reference evapotranspiration that adjusts for plant factors and irrigation efficiency, which are two major influences on the amount of water that needs to be applied to the landscape. FOOTPRINT AREA [DSA-SS]. The total area of the furthest exterior wall of the structure projected to natural grade, not including exterior areas such as stairs, covered walkways, patios and decks. METERING FAUCET. A self-closing faucet that dispenses a specific volume of water for each actuation cycle. The volume or cycle duration can be fixed or adjustable. GRAYWATER. Pursuant to Health and Safety Code Section 17922.12, "graywater" means untreated wastewater that has not been contaminated by any toilet discharge, has not been affected by infectious, contaminated, or unhealthy bodily wastes, and does not present a threat from contamination by unhealthful processing, manufacturing, or operating wastes. "Graywater" includes, but is not limited to wastewater from bathtubs, showers, bathroom washbasins, clothes washing machines and laundry tubs, but does not include waste water from kitchen sinks or dishwashers. MODEL WATER EFFICIENT LANDSCAPE ORDINANCE (MWELO). The California ordinance regulating landscape design, installation and maintenance practices that will ensure commercial, multifamily and other developer installed landscapes greater than 2500 square feet meet an irrigation water budget developed based on landscape area and climatological parameters. MODEL WATER EFFICIENT LANDSCAPE ORDINANCE [MWELO], [HCD] The California model ordinance (California Code of Regulations, Title 23, Division 2, Chapter 2.7), regulating landscape design, installation and maintenance practices. Local agencies are required to adopt the updated MWELO, or adopt a local ordinance at least as effective as the MWELO. POTABLE WATER. Water that is drinkable and meets the U.S. Environmental Protection Agency (EPA) Drinking Water Standards. See definition in the California Plumbing Code, Part 5. POTABLE WATER, [HCD] Water that is satisfactory for drinking, culinary, and domestic purposes, and meets the U.S. Environmental Protection Agency (EPA) Drinking Water Standards and the requirements of the Health Authority Having Jurisdiction. RECYCLED WATER. Water which, as a result of treatment of waste, is suitable for a direct beneficial use or a controlled use that would otherwise occur [Water Code Section 13505 (n)]. Simply put, recycled water is water treated to remove waste matter attaining a quality that is suitable to use the water again. SUBMETER. A meter installed subordinates to a site meter. Usually used to measure water intended for one purpose, such as landscape irrigation. For the purposes of CALGreen, a dedicated meter may be considered a submeter. WATER BUDGET. Is the estimated total landscape irrigation water use which shall not exceed the maximum applied water allowance calculated in accordance with the Department of Water Resources Model Efficient Landscape Ordinance (MWELO).

SECTION 5.303 INDOOR WATER USE 5.303.1 METERS. Separate submeters or metering devices shall be installed for the uses described in Sections 503.1.1 and 503.1.2. 5.303.1.1 Buildings in excess of 50,000 square feet. Separate submeters shall be installed as follows: 1. For each individual leased, rented or other tenant space within the building projected to consume more than 100 gal/day (380 L/day), including, but not limited to, spaces used for laundry or cleaners, restaurant or food service, medical or dental office, laboratory, or beauty salon or barber shop. 2. Where separate submeters for individual building tenants are unfeasible, for water supplied to the following subsystems: a. Makeup water for cooling towers where flow through is greater than 500 gpm (30 L/s). b. Makeup water for evaporative coolers greater than 6 gpm (0.04 L/s). c. Steam and hot water boilers with energy input more than 500,000 Btu/h (147 kW). 5.303.1.2 Excess consumption. A separate submeter or metering device shall be provided for any tenant within a new building or within an addition that is projected to consume more than 1,000 gal/day. 5.303.3 WATER CONSERVING PLUMBING FIXTURES AND FITTINGS. Plumbing fixtures (water closets and urinals) and fittings (faucets and showerheads) shall comply with the following: 5.303.3.1 Water Closets. The effective flush volume of all water closets shall not exceed 1.28 gallons per flush. Tank-type water closets shall be certified to the performance criteria of the U.S. EPA WaterSense Specification for Tank-Type toilets. Note: The effective flush volume of dual flush toilets is defined as the composite, average flush volume of two reduced flushes and one full flush. 5.303.3.2 Urinals. 5.303.3.2.1 Wall-mounted Urinals. The effective flush volume of wall-mounted urinals shall not exceed 0.125 gallons per flush. 5.303.3.2.2 Floor-mounted Urinals. The effective flush volume of floor-mounted or other urinals shall not exceed 0.5 gallons per flush. 5.303.3.3 Showerheads. [BSC-CG] 5.303.3.3.1 Single showerhead. Showerheads shall have a maximum flow rate of not more than 1.8 gallons per minute at 80 psi. Showerheads shall be certified to the performance criteria of the U.S. EPA WaterSense Specification for Showerheads. 5.303.3.3.2 Multiple showerheads serving one shower. When a shower is served by more than one showerhead, the combined flow rate of all the showerheads and/or other shower outlets controlled by a single valve shall not exceed 1.8 gallons per minute at 80 psi, or the shower shall be designed to allow only one shower outlet to be in operation at a time. Note: A hand-held shower shall be considered a showerhead.

DISCLAIMER: THIS DOCUMENT IS PROVIDED AND INTENDED TO BE USED AS A MEANS TO INDICATE AREAS OF COMPLIANCE WITH THE 2019 CALIFORNIA GREEN BUILDING STANDARDS (CALGREEN) CODE. DUE TO THE VARIABLES BETWEEN BUILDING DEPARTMENT JURISDICTIONS, THIS CHECKLIST IS TO BE USED ON AN INDIVIDUAL PROJECT BASIS AND MAY BE MODIFIED BY THE END USER TO MEET THOSE INDIVIDUAL NEEDS. THE END USER ASSUMES ALL RESPONSIBILITY ASSOCIATED WITH THE USE OF THIS DOCUMENT, INCLUDING VERIFICATION WITH THE FULL CODE.

2019 CALIFORNIA GREEN BUILDING STANDARDS CODE

NONRESIDENTIAL MANDATORY MEASURES, SHEET 1 (January 2020, Includes August 2019 Supplement)

Y N/A RESPON. PARTY YES NOT APPLICABLE RESPONSIBLE PARTY (i.e. ARCHITECT, ENGINEER, OWNER, CONTRACTOR, INSPECTOR ETC.)

Y	N/A	RESPON. PARTY	SECTION	Y	N/A	RESPON. PARTY	SECTION	Y	N/A	RESPON. PARTY	SECTION	Y	N/A	RESPON. PARTY	SECTION
			5.303.3.4 Faucets and fountains.				SECTION 5.407 WATER RESISTANCE AND MOISTURE MANAGEMENT				5.410.2 COMMISSIONING. [N] New buildings 10,000 square feet and over.				5.410.4.4 Reporting.
			5.303.3.4.1 Nonresidential Lavatory faucets.				5.407.1 WEATHER PROTECTION.				5.410.2.1 Commissioning plan.				5.410.4.5 Operational and maintenance (O & M) manual.
			5.303.3.4.2 Kitchen faucets.				5.407.2 MOISTURE CONTROL.				5.410.2.2 Commissioning goals.				5.410.4.5.1 Inspections and reports.
			5.303.3.4.3 Wash fountains.				5.407.2.1 Sprinklers.				5.410.2.3 Commissioning plan.				
			5.303.3.4.4 Metering faucets.				5.407.2.2 Entries and openings.				5.410.2.4 Commissioning report.				
			5.303.3.4.5 Metering faucets for wash fountains.				5.407.2.2.1 Exterior door protection.				5.410.2.5 Documentation and training.				
			5.303.4 COMMERCIAL KITCHEN EQUIPMENT.				5.407.2.2.2 Flashing.				5.410.2.6 Commissioning report.				
			5.303.4.1 Food Waste Disposers.				SECTION 5.408 CONSTRUCTION WASTE REDUCTION, DISPOSAL AND RECYCLING				5.410.4.2 Testing and adjusting.				
			5.303.5 AREAS OF ADDITION OR ALTERATION.				5.408.1 CONSTRUCTION WASTE MANAGEMENT.				5.410.4.3 Testing and adjusting.				
			5.303.6 STANDARDS FOR PLUMBING FIXTURES AND FITTINGS.				5.408.1.1 Construction waste management plan.				5.410.4.4 Testing and adjusting.				
			SECTION 5.304 OUTDOOR WATER USE				5.408.1.2 Waste stream reduction alternative.				5.410.4.5 Testing and adjusting.				
			5.304.1 OUTDOOR POTABLE WATER USE IN LANDSCAPE AREAS.				5.408.1.4 Documentation.				5.410.4.6 Testing and adjusting.				
			5.304.6 OUTDOOR POTABLE WATER USE IN LANDSCAPE AREAS.				5.408.2 UNIVERSAL WASTE.				5.410.4.7 Testing and adjusting.				
			5.304.6.1 Newly constructed landscapes.				5.408.3 EXCAVATED SOIL AND LAND CLEARING DEBRIS.				5.410.4.8 Testing and adjusting.				
			5.304.6.2 Rehabilitated landscapes.				5.408.4 TESTING AND ADJUSTING.				5.410.4.9 Testing and adjusting.				
							5.410.4.1 RECYCLING BY OCCUPANTS.				5.410.4.10 Testing and adjusting.				
							5.410.4.2 Sample ordinance.				5.410.4.11 Testing and adjusting.				
							5.410.4.3 Procedures.				5.410.4.12 Testing and adjusting.				
							5.410.4.3.1 HVAC balancing.				5.410.4.13 Testing and adjusting.				
							5.410.4.3.2 Testing and adjusting.				5.410.4.14 Testing and adjusting.				
							5.410.4.3.3 Testing and adjusting.				5.410.4.15 Testing and adjusting.				
							5.410.4.3.4 Testing and adjusting.				5.410.4.16 Testing and adjusting.				
							5.410.4.3.5 Testing and adjusting.				5.410.4.17 Testing and adjusting.				
							5.410.4.3.6 Testing and adjusting.				5.410.4.18 Testing and adjusting.				
							5.410.4.3.7 Testing and adjusting.				5.410.4.19 Testing and adjusting.				
							5.410.4.3.8 Testing and adjusting.				5.410.4.20 Testing and adjusting.				
							5.410.4.3.9 Testing and adjusting.				5.410.4.21 Testing and adjusting.				
							5.410.4.3.10 Testing and adjusting.				5.410.4.22 Testing and adjusting.				
							5.410.4.3.11 Testing and adjusting.				5.410.4.23 Testing and adjusting.				
							5.410.4.3.12 Testing and adjusting.				5.410.4.24 Testing and adjusting.				
							5.410.4.3.13 Testing and adjusting.				5.410.4.25 Testing and adjusting.				
							5.410.4.3.14 Testing and adjusting.				5.410.4.26 Testing and adjusting.				
							5.410.4.3.15 Testing and adjusting.				5.410.4.27 Testing and adjusting.				
							5.410.4.3.16 Testing and adjusting.				5.410.4.28 Testing and adjusting.				
							5.410.4.3.17 Testing and adjusting.				5.410.4.29 Testing and adjusting.				
							5.410.4.3.18 Testing and adjusting.				5.410.4.30 Testing and adjusting.				
							5.410.4.3.19 Testing and adjusting.				5.410.4.31 Testing and adjusting.				
							5.410.4.3.20 Testing and adjusting.				5.410.4.32 Testing and adjusting.				
							5.410.4.3.21 Testing and adjusting.				5.410.4.33 Testing and adjusting.				
							5.410.4.3.22 Testing and adjusting.				5.410.4.34 Testing and adjusting.				
							5.410.4.3.23 Testing and adjusting.				5.410.4.35 Testing and adjusting.				
							5.410.4.3.24 Testing and adjusting.				5.410.4.36 Testing and adjusting.				
							5.410.4.3.25 Testing and adjusting.				5.410.4.37 Testing and adjusting.				
							5.410.4.3.26 Testing and adjusting.				5.410.4.38 Testing and adjusting.				
							5.410.4.3.27 Testing and adjusting.				5.410.4.39 Testing and adjusting.				
							5.410.4.3.28 Testing and adjusting.				5.410.4.40 Testing and adjusting.				
							5.410.4.3.29 Testing and adjusting.				5.410.4.41 Testing and adjusting.				
							5.410.4.3.30 Testing and adjusting.				5.410.4.42 Testing and adjusting.				
							5.410.4.3.31 Testing and adjusting.				5.410.4.43 Testing and adjusting.				
							5.410.4.3.32 Testing and adjusting.				5.410.4.44 Testing and adjusting.				
							5.410.4.3.33 Testing and adjusting.				5.410.4.45 Testing and adjusting.				
							5.410.4.3.34 Testing and adjusting.				5.410.4.46 Testing and adjusting.				
							5.410.4.3.35 Testing and adjusting.				5.410.4.47 Testing and adjusting.				
							5.410.4.3.36 Testing and adjusting.				5.410.4.48 Testing and adjusting.				
							5.410.4.3.37 Testing and adjusting.				5.410.4.49 Testing and adjusting.				
							5.410.4.3.38 Testing and adjusting.				5.410.4.50 Testing and adjusting.				
							5.410.4.3.39 Testing and adjusting.				5.410.4.51 Testing and adjusting.				
							5.410.4.3.40 Testing and adjusting.				5.410.4.52 Testing and adjusting.				
							5.410.4.3.41 Testing and adjusting.				5.410.4.53 Testing and adjusting.				
							5.410.4.3.42 Testing and adjusting.				5.410.4.54 Testing and adjusting.				
							5.410.4.3.43 Testing and adjusting.				5.410.4.55 Testing and adjusting.				
							5.410.4.3.44 Testing and adjusting.				5.410.4.56 Testing and adjusting.				
							5.410.4.3.45 Testing and adjusting.				5.410.4.57 Testing and adjusting.				
							5.410.4.3.46 Testing and adjusting.				5.410.4.58 Testing and adjusting.				
							5.410.4.3.47 Testing and adjusting.				5.410.4.59 Testing and adjusting.				
							5.410.4.3.48 Testing and adjusting.				5.410.4.60 Testing and adjusting.				
							5.410.4.3.49 Testing and adjusting.				5.410.4.61 Testing and adjusting.				
							5.410.4.3.50 Testing and adjusting.				5.410.4.62 Testing and adjusting.				
							5.410.4.3.51 Testing and adjusting.				5.410.4.63 Testing and adjusting.				
							5.410.4.3.52 Testing and adjusting.				5.410.4.64 Testing and adjusting.				
							5.410.4.3.53 Testing and adjusting.				5.410.4.65 Testing and adjusting.				
							5.410.4.3.54 Testing and adjusting.				5.410.4.66 Testing and adjusting.				
							5.410.4.3.55 Testing and adjusting.				5.410.4.67 Testing and adjusting.				
							5.410.4.3.56 Testing and adjusting.				5.410.4.68 Testing and adjusting.				
							5.410.4.3.57 Testing and adjusting.				5.410.4.69 Testing and adjusting.				
							5.410.4.3.58 Testing and adjusting.				5.410.4.70 Testing and adjusting.				
							5.410.4.3.59 Testing and adjusting.				5.410.4.71 Testing and adjusting.				
							5.410.4.3.60 Testing and adjusting.				5.410.4.72 Testing and adjusting.				
							5.410.4.3.61 Testing and adjusting.				5.410.4.73 Testing and adjusting.				
							5.410.4.3.62 Testing and adjusting.				5.410.4.74 Testing and adjusting.				
							5.410.4.3.63 Testing and adjusting.				5.410.4.75 Testing and adjusting.				
							5.410.4.3.64 Testing and adjusting.				5.410.4.76 Testing and adjusting.				
							5.410.4.3.65 Testing and adjusting.				5.410.4.77 Testing and adjusting.				
							5.410.4.3.66 Testing and adjusting.				5.410.4.78 Testing and adjusting.				
							5.410.4.3.67 Testing and adjusting.				5.410.4.79 Testing and adjusting.				
							5.410.4.3.68 Testing and adjusting.				5.410.4.80 Testing and adjusting.				
							5.410.4.3.69 Testing and adjusting.				5.410.4.81 Testing and adjusting.				
							5.410.4.3.70 Testing and adjusting.				5.410.4.82 Testing and adjusting.				
							5.410.4.3.71 Testing and adjusting.				5.410.4.83 Testing and adjusting.				
							5.410.4.3.72 Testing and adjusting.				5.410.4.84 Testing and adjusting.				
							5.410.4.3.73 Testing and adjusting.				5.410.4.85 Testing and adjusting.				
							5.410.4.3.74 Testing and adjusting.				5.410.4.86 Testing and adjusting.				
							5.410.4.3.75 Testing and adjusting.				5.410.4.87 Testing and adjusting.				
							5.410.4.3.76 Testing and adjusting.				5.410.4.88 Testing and adjusting.				
							5.410.4.3.77 Testing and adjusting.				5.410.4.89 Testing and adjusting.				
							5.410.4.3.78 Testing and adjusting.				5.410.4.90 Testing and adjusting.				
							5.410.4.3.79 Testing and adjusting.				5.410.4.91 Testing and adjusting.				
							5.410.4.3.80 Testing and adjusting.				5.410.4.92 Testing and adjusting.				
							5.410.4.3.81 Testing and adjusting.				5.410.4.93 Testing and adjusting.				
							5.410.4.3.82 Testing and adjusting.				5.410.4.94 Testing and adjusting.				
							5.410.4.								

2019 CALIFORNIA GREEN BUILDING STANDARDS CODE NONRESIDENTIAL MANDATORY MEASURES, SHEET 1 (January 2020, Includes August 2019 Supplement)

Y	NA	RESPON. PARTY
X		RESPON. PARTY

5.504.4 FINISH MATERIAL POLLUTANT CONTROL. Finish materials shall comply with Sections 5.504.4.1 through 5.504.4.6.

LRG GC

5.504.4.1 Adhesives, sealants and caulks. Adhesives, sealants, and caulks used on the project shall meet the requirements of the following standards:
1. Adhesives, adhesive bonding primers, adhesive primers, sealants, sealant primers and caulks shall comply with local or regional air pollution control or air quality management district rules where applicable, or SCAQMD Rule 1168 VOC limits, as shown in Tables 5.504.4.1 and 5.504.4.2. Such products also shall comply with the Rule 1168 prohibition on the use of certain toxic compounds (chloroform, ethylene dichloride, methylene chloride, perchloroethylene and trichloroethylene), except for aerosol products as specified in subsection 2, below.
2. Aerosol adhesives, and smaller unit sizes of adhesives, and sealant or caulking compounds (in units of product, less packaging, which do not weigh more than one pound and do not consist of more than 16 fluid ounces) shall comply with statewide VOC standards and other requirements, including prohibitions on use of certain toxic compounds, of California Code of Regulations, Title 17, commencing with Section 94507.

ARCHITECTURAL APPLICATIONS	CURRENT VOC LIMIT
INDOOR CARPET ADHESIVES	50
CARPET PAD ADHESIVES	50
OUTDOOR CARPET ADHESIVES	150
WOOD FLOORING ADHESIVES	100
RUBBER FLOOR ADHESIVES	60
SUBFLOOR ADHESIVES	50
CERAMIC TILE ADHESIVES	60
VCT & ASPHALT TILE ADHESIVES	95
DRYWALL & PANEL ADHESIVES	50
COVE BASE ADHESIVES	50
MULTIPURPOSE CONSTRUCTION ADHESIVES	70
STRUCTURAL GLAZING ADHESIVES	100
SINGLE-PLY ROOF MEMBRANE ADHESIVES	250
OTHER ADHESIVES NOT SPECIFICALLY LISTED	50
SPECIALTY APPLICATIONS	
PVC WELDING	510
CPVC WELDING	490
ABS WELDING	325
PLASTIC CEMENT WELDING	250
ADHESIVE PRIMER FOR PLASTIC	550
CONTACT ADHESIVE	80
SPECIAL PURPOSE CONTACT ADHESIVE	250
STRUCTURAL WOOD MEMBER ADHESIVE	140
TOP & TRIM ADHESIVE	250
SUBSTRATE SPECIFIC APPLICATIONS	
METAL TO METAL	30
PLASTIC FOAMS	50
POROUS MATERIAL (EXCEPT WOOD)	50
WOOD	30
FIBERGLASS	80

1. IF AN ADHESIVE IS USED TO BOND DISSIMILAR SUBSTRATES TOGETHER, THE ADHESIVE WITH THE HIGHEST VOC CONTENT SHALL BE ALLOWED.

2. FOR ADDITIONAL INFORMATION REGARDING METHODS TO MEASURE THE VOC CONTENT SPECIFIED IN THIS TABLE, SEE SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT RULE 1168, www.arb.ca.gov/DRDB/SC/ICRH/MTLR/1168.PDF

SEALANTS	CURRENT VOC LIMIT
ARCHITECTURAL	250
MARINE DECK	760
NONMEMBRANE ROOF	300
ROADWAY	250
SINGLE-PLY ROOF MEMBRANE	450
OTHER	420
SEALANT PRIMERS	
ARCHITECTURAL	
NONPOROUS	250
POROUS	775
MODIFIED BITUMINOUS	500
MARINE DECK	760
OTHER	750

NOTE: FOR ADDITIONAL INFORMATION REGARDING METHODS TO MEASURE THE VOC CONTENT SPECIFIED IN THESE TABLES, SEE SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT RULE 1168.

5.504.4.3 Paints and coatings. Architectural paints and coatings shall comply with VOC limits in Table 1 of the ARB Architectural Coatings Suggested Control Measure, as shown in Table 5.504.4.3, unless more stringent local limits apply. The VOC content limit for coatings that do not meet the definitions for the specialty coating categories listed in Table 5.504.4.3 shall be determined by classifying the coating as a Flat, Nonflat or Nonflat-High Gloss coating, based on its gloss, as defined in Subsections 4.21, 4.35 and 4.37 of the 2007 California Air Resources Board Suggested Control Measure, and the corresponding Flat, Nonflat or Nonflat-High Gloss VOC limit in Table 5.504.4.3 shall apply.

5.504.4.3.1 Aerosol paints and coatings. Aerosol paints and coatings shall meet the PWMM Limits for ROG in Section 94522(a)(3) and other requirements, including prohibitions on use of certain toxic compounds and ozone depleting substances, in Sections 94522(c)(2) and (c)(2) of California Code of Regulations, Title 17, commencing with Section 94520; and in areas under the jurisdiction of the Bay Area Air Quality Management District additionally comply with the percent VOC by weight of product limits of Regulation 9 Rule 49.

Y	NA	RESPON. PARTY
X		RESPON. PARTY

TABLE 5.504.4.3 - VOC CONTENT LIMITS FOR ARCHITECTURAL COATINGS

GRAMS OF VOC PER LITER OF COATING, LESS WATER & LESS EXEMPT COMPOUNDS

COATING CATEGORY	CURRENT VOC LIMIT
FLAT COATINGS	50
NONFLAT COATINGS	100
NONFLAT HIGH GLOSS COATINGS	150
SPECIALTY COATINGS	
ALUMINUM ROOF COATINGS	400
BASEMENT SPECIALTY COATINGS	400
BITUMINOUS ROOF COATINGS	50
BITUMINOUS ROOF PRIMERS	350
BOND BREAKERS	350
CONCRETE CURING COMPOUNDS	350
CONCRETE/MASONRY SEALERS	100
DRIVEWAY SEALERS	50
DRY FOG COATINGS	150
FAUX FINISHING COATINGS	350
FIRE RESISTIVE COATINGS	350
FLOOR COATINGS	100
FORM-RELEASE COMPOUNDS	250
GRAPHIC ARTS COATINGS (SIGN PAINTS)	500
HIGH-TEMPERATURE COATINGS	420
INDUSTRIAL MAINTENANCE COATINGS	250
LOW SOLIDS COATINGS	120
MAGNESITE CEMENT COATINGS	450
MASTIC TEXTURE COATINGS	100
METALLIC PIGMENTED COATINGS	500
MULTICOLOR COATINGS	250
PRETREATMENT WASH PRIMERS	420
PRIMERS, SEALERS, & UNDERCOATERS	100
REACTIVE PENETRATING SEALERS	350
RECYCLED COATINGS	250
ROOF COATINGS	50
RUST PREVENTATIVE COATINGS	250
SHELLAC:	
CLEAR	730
OPAQUE	550
SPECIALTY PRIMERS, SEALERS & UNDERCOATERS	
STAINS	250
STONE CONSOLIDANTS	450
SWIMMING POOL COATINGS	340
TRAFFIC MARKING COATINGS	100
TUB & TILE REFINISH COATINGS	420
WATERPROOFING MEMBRANES	250
WOOD COATINGS	275
WOOD PRESERVATIVES	350
ZINC-RICH PRIMERS	340

1. GRAMS OF VOC PER LITER OF COATING, INCLUDING WATER & EXEMPT COMPOUNDS
2. THE SPECIFIED LIMITS REMAIN IN EFFECT UNLESS REVISED LIMITS ARE LISTED IN SUBSEQUENT COLUMNS IN THE TABLE.
3. VALUES IN THIS TABLE ARE DERIVED FROM THOSE SPECIFIED BY THE CALIFORNIA AIR RESOURCES BOARD, ARCHITECTURAL COATINGS SUGGESTED CONTROL MEASURE, FEB. 1, 2006. MORE INFORMATION IS AVAILABLE FROM THE AIR RESOURCES BOARD.

5.504.4.3.2 Verification. Verification of compliance with this section shall be provided at the request of the enforcing agency. Documentation may include, but is not limited to, the following:
1. Manufacturer's product specification
2. Field verification of on-site product containers

5.504.4.4 Carpet Systems. All carpet installed in the building interior shall meet at least one of the testing and product requirements:
1. Carpet and Rug Institute's Green Label Plus Program.
2. Compliant with the VOC-emission limits and testing requirements specified in the California Department of Public Health Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers, Version 1.1, February 2019 (also known as CDPH Standard Method V1.1 or Specification 01350).
3. NSF/ANSI 140 at the Gold level or higher.
4. Scientific Certifications Systems Sustainable Choice; or
5. Compliant with the Collaborative for High Performance Schools California (2014 CA-CHPS) Criteria listed in the CHPS High Performance Product Database.

5.504.4.4.1 Carpet cushion. All carpet cushion installed in the building interior shall meet the requirements of the Carpet and Rug Institute Green Label program.

5.504.4.4.2 Carpet adhesive. All carpet adhesive shall meet the requirements of Table 5.504.4.1.

5.504.4.5 Composite wood products. Hardwood plywood, particleboard and medium density fiberboard composite wood products used on the interior or exterior of the buildings shall meet the requirements for formaldehyde as specified in ARE's Air Toxics Control Measure (ATCM) for Composite Wood (17 CCR 93120 et seq.). These materials not exempted under the ATCM must meet the specified emission limits, as shown in Table 5.504.4.5.

5.504.4.5.3 Documentation. Verification of compliance with this section shall be provided as requested by the enforcing agency. Documentation shall include at least one of the following:
1. Product certifications and specifications.
2. Chain of custody certifications.
3. Product labeled and invoiced as meeting the Composite Wood Products regulation (see CCR, Title 17, Section 93120, et seq.).
4. Exterior grade products marked as meeting the PS-1 or PS-2 standards of the Engineered Wood Association, the Australian AS/NZS 2269 or European 636 3S standards.
5. Other methods acceptable to the enforcing agency.

Y	NA	RESPON. PARTY
X		RESPON. PARTY

TABLE 5.504.4.5 - FORMALDEHYDE LIMITS:

PRODUCT	CURRENT LIMIT
HARDWOOD PLYWOOD VENEER CORE	0.05
HARDWOOD PLYWOOD COMPOSITE CORE	0.05
PARTICLE BOARD	0.09
MEDIUM DENSITY FIBERBOARD	0.11
THIN MEDIUM DENSITY FIBERBOARD:	0.13

1. VALUES IN THIS TABLE ARE DERIVED FROM THOSE SPECIFIED BY THE CALIFORNIA AIR RESOURCES BOARD. AIR TOXICS CONTROL MEASURE FOR COMPOSITE WOOD AS TESTED IN ACCORDANCE WITH ASTM E 1333. FOR ADDITIONAL INFORMATION, SEE CALIFORNIA CODE OF REGULATIONS, TITLE 17, SECTIONS 93120 THROUGH 93120.12.
2. THIN MEDIUM DENSITY FIBERBOARD HAS A MAXIMUM THICKNESS OF 5/16 INCHES (8 MM).

5.504.4.6 Resilient flooring systems. For 80 percent of floor area receiving resilient flooring, installed resilient flooring shall meet at least one of the following:
1. Certified under the Resilient Floor Covering Institute (RFCI) FloorScore program;
2. Compliant with the VOC-emission limits and testing requirements specified in the California Department of Public Health's 2010 Standard Method for the Testing and Evaluation Chambers, Version 1.1, February 2010;
3. Compliant with the Collaborative for High Performance Schools California (2014 CA-CHPS) Criteria and listed in the CHPS High Performance Product Database; or
4. Products certified under UL GREENGUARD Gold (formerly the Greenguard Children's & Schools Program).

5.504.4.6.1 Verification of compliance. Documentation shall be provided verifying that resilient flooring materials meet the pollutant emission limits.

5.504.5.3 Filters. In mechanically ventilated buildings, provide regularly occupied areas of the building with air filtration media for outside and return air that provides at least a Minimum Efficiency Reporting Value (MERV) of 13. MERV 13 filters shall be installed prior to occupancy, and recommendations for maintenance with filters of the same value shall be included in the operation and maintenance manual.

5.504.5.3.1 Labeling. Installed filters shall be clearly labeled by the manufacturer indicating the MERV rating.

5.504.7 ENVIRONMENTAL TOBACCO SMOKE (ETS) CONTROL. Where outdoor areas are provided for smoking, prohibit smoking within 25 feet of building entries, outdoor air intakes and operable windows and within the building as already prohibited by other laws or regulations; or as enforced by ordinances, regulations or policies of any city, county, city and county, California Community College, campus of the California State University, or campus of the University of California, whichever are more stringent. When ordinances, regulations or policies are not in place, post signage to inform building occupants of the prohibitions.

OWNER

SECTION 5.505 INDOOR MOISTURE CONTROL

5.505.1 INDOOR MOISTURE CONTROL. Buildings shall meet or exceed the provisions of California Building Code, CCR, Title 24, Part 2, Sections 1202 (Ventilation) and Chapter 14 (Exterior Walls). For additional measures, see Section 5.407.2 of this code.

SECTION 5.506 INDOOR AIR QUALITY

5.506.1 OUTSIDE AIR DELIVERY. For mechanically or naturally ventilated spaces in buildings, meet the minimum requirements of Section 120.1 (Requirements For Ventilation) of the California Energy Code, or the applicable local code, whichever is more stringent, and Division 1, Chapter 4 of CCR, Title 8.

5.506.2 CARBON DIOXIDE (CO₂) MONITORING. For buildings or additions equipped with demand control ventilation, CO₂ sensors and ventilation controls shall be specified and installed in accordance with the requirements of the California Energy Code, Section 120(c)(4).

SECTION 5.507 ENVIRONMENTAL COMFORT

5.507.4 ACOUSTICAL CONTROL. Empty building assemblies and components with Sound Transmission Class (STC) values determined in accordance with ASTM E 90 and ASTM E 413, or Outdoor-Indoor Sound Transmission Class (OITC) determined in accordance with ASTM E 1332, using either the prescriptive or performance method in Section 5.507.4.1 or 5.507.4.2.

Exception: Buildings with few or no occupants or where occupants are not likely to be affected by exterior noise, as determined by the enforcement authority, such as factories, stadiums, storage, enclosed parking structures and utility buildings.

Exception: [DSA-SS] For public schools and community colleges, the requirements of this section and all subsections apply only to new construction.

5.507.4.1 Exterior noise transmission, prescriptive method. Wall and roof-ceiling assemblies exposed to the noise source making up the building or addition envelope or altered envelope shall meet a composite STC rating of at least 50 or a composite OITC rating of no less than 40, with exterior windows of a minimum STC of 40 or OITC of 30 in the following locations:
1. Within the 65 CNEL noise contour of an airport.

Exceptions:
1. Leq or CNEL for military airports shall be determined by the facility Air Installation Compatible Land Use Zone (AICLZ) plan.
2. Leq or CNEL for other airports and heliports for which a land use plan has not been developed shall be determined by the local general plan noise element.

2. Within the 65 CNEL or Leq noise contour of a freeway or expressway, railroad, industrial source or fixed-guideway source as determined by the Noise Element of the General Plan.

5.507.4.1.1 Noise exposure where noise contours are not readily available. Buildings exposed to a noise level of 65 dB L_{eq} 1-hr during any hour of operation shall have building, addition or alteration exterior wall and roof-ceiling assemblies exposed to the noise source meeting a composite STC rating of at least 45 (or OITC 35), with exterior windows of a minimum STC of 40 (or OITC 30).

5.507.4.2 Performance Method. For buildings located as defined in Section 5.507.4.1 or 5.507.4.1.1, wall and roof-ceiling assemblies exposed to the noise source making up the building or addition envelope or altered envelope shall be constructed to provide an interior noise environment attributable to exterior sources that does not exceed an hourly equivalent noise level (Leq-1hr) of 50 dBA in occupied areas during any hour of operation.

5.507.4.2.1 Site Features. Exterior features such as sound walls or earth berms may be utilized as appropriate to the building, addition or alteration project to mitigate sound migration to the interior.

5.507.4.2.2 Documentation of Compliance. An acoustical analysis documenting complying interior sound levels shall be prepared by personnel approved by the architect or engineer of record.

5.507.4.3 Interior sound transmission. Wall and floor-ceiling assemblies separating tenant spaces and tenant spaces and public spaces shall have an STC of at least 40.

Note: Examples of assemblies and their various STC ratings may be found at the California Office of Noise Control: www.tdsbaa.org/DF-Cases/Submittals/stc_ratings.pdf.

SECTION 5.508 OUTDOOR AIR QUALITY

5.508.1 Ozone depletion and greenhouse gas reductions. Installations of HVAC, refrigeration and fire suppression equipment shall comply with Sections 5.508.1.1 and 5.508.1.2.

5.508.1.1 Chlorofluorocarbons (CFCs). Install HVAC, refrigeration and fire suppression equipment that do not contain CFCs.

5.508.1.2 Halons. Install HVAC, refrigeration and fire suppression equipment that do not contain Halons.

5.508.2 Supermarket refrigeration leak reduction. New commercial refrigeration systems shall comply with the provisions of this section when installed in retail food stores 8,000 square feet or more conditioned area, and that utilize either refrigerated display cases, or walk-in coolers or freezers connected to remote compressor units or condensing units. The leak reduction measures apply to refrigeration systems containing high-global-warming potential (high-GWP) refrigerants with a GWP of 150 or greater. New refrigeration systems include both new facilities and the replacement of existing refrigeration systems in existing facilities.

Exception: Refrigeration systems containing low-global warming potential (low-GWP) refrigerant with a GWP value less than 150 are not subject to this section. Low-GWP refrigerants are nonzone-depleting refrigerants that include ammonia, carbon dioxide (CO₂), and potentially other refrigerants.

Y	NA	RESPON. PARTY
X		RESPON. PARTY

5.508.2.1 Refrigerant piping. Piping compliant with the California Mechanical Code shall be installed to be accessible for leak protection and repairs. Piping runs using threaded pipe, copper tubing with an outside diameter (OD) less than 1/4 inch, flared tubing connections and short radius elbows shall not be used in refrigerant systems except as noted below.

5.508.2.1.1 Threaded pipe. Threaded connections are permitted at the compressor rack.

5.508.2.1.2 Copper pipe. Copper tubing with an OD less than 1/4 inch may be used in systems with a refrigerant charge of 5 pounds or less.

5.508.2.1.2.1 Anchorage. One-fourth-inch OD tubing shall be securely clamped to a rigid base to keep vibration levels below 0 mils.

5.508.2.1.3 Flared tubing connections. Double-flared tubing connections may be used for pressure controls, valve pilot lines and oil.

Exception: Single-flared tubing connections may be used with a muffling seal coated with industrial sealant suitable for use with refrigerants and tightened in accordance with manufacturer's recommendations.

5.508.2.1.4 Elbows. Short radius elbows are only permitted where space limitations prohibit use of long radius elbows.

5.508.2.2 Valves. Valves and fittings shall comply with the California Mechanical Code and as follows.

5.508.2.2.1 Pressure relief valves. For vessels containing high-GWP refrigerant, a rupture disc shall be installed between the outlet of the vessel and the inlet of the pressure relief valve.

5.508.2.2.1.1 Pressure detection. A pressure gauge, pressure transducer or other device shall be installed in the space between the rupture disc and the relief valve inlet to indicate a disc rupture or discharge of the relief valve.

5.508.2.2.2 Access valves. Only Schrader access valves with a brass or steel body are permitted for use.

5.508.2.2.2.1 Valve caps. For systems with a refrigerant charge of 5 pounds or more, valve caps shall be brass or steel and not plastic.

5.508.2.2.2.2 Seal caps. If designed for it, the cap shall have a neoprene O-ring in place.

5.508.2.2.2.2.1 Chain tethers. Chain tethers to fit over the stem are required for valves designed to have seal caps.
Exception: Valves with seal caps that are not removed from the valve during stem operation.

5.508.2.3 Refrigerated service cases. Refrigerated service cases holding food products containing vinegar and salt shall have evaporator coils of corrosion-resistant material, such as stainless steel, or be coated to prevent corrosion from these substances.

5.508.2.3.1 Coil coating. Consideration shall be given to the heat transfer efficiency of coil coating to maximize energy efficiency.

5.508.2.4 Refrigerant receivers. Refrigerant receivers with capacities greater than 200 pounds shall be fitted with a device that indicates the level of refrigerant in the receiver.

5.508.2.5 Pressure testing. The system shall be pressure tested during installation prior to evacuation and charging.

5.508.2.5.1 Minimum pressure. The system shall be charged with regulated dry nitrogen and appropriate tracer gas to bring system pressure up to 300 psig minimum.

5.508.2.5.2 Leaks. Check the system for leaks, repair any leaks, and retest for pressure using the same gauge.

5.508.2.5.3 Allowable pressure change. The system shall stand, unaltered, for 24 hours with no more than a +/- one pound pressure change from 300 psig, measured with the same gauge.

5.508.2.6 Evacuation. The system shall be evacuated after pressure testing and prior to charging.

5.508.2.6.1 First vacuum. Pull a system vacuum down to at least 1000 microns (+/- 50 microns), and hold for 30 minutes.

5.508.2.6.2 Second vacuum. Pull a second system vacuum to a minimum of 500 microns and hold for 30 minutes.

5.508.2.6.3 Third vacuum. Pull a third vacuum down to a minimum of 300 microns, and hold for 24 hours with a maximum drift of 100 microns over a 24-hour period.

CHAPTER 7 INSTALLER & SPECIAL INSPECTOR QUALIFICATIONS

702 QUALIFICATIONS

702.1 INSTALLER TRAINING. HVAC system installers shall be trained and certified in the proper installation of HVAC systems including ducts and equipment by a nationally or regionally recognized training or certification program. Uncertified persons may perform HVAC installations when under the direct supervision and responsibility of a person trained and certified to install HVAC systems or contractor licensed to install HVAC systems. Examples of acceptable HVAC training and certification programs include but are not limited to the following:

- State certified apprenticeship programs.
- Public utility training programs.
- Training programs sponsored by trade, labor or statewide energy consulting or verification organizations.
- Programs sponsored by manufacturing organizations.
- Other programs acceptable to the enforcing agency.

702.2 SPECIAL INSPECTION [HCD]. When required by the enforcing agency, the owner or the responsible entity acting as the owner's agent shall employ one or more special inspectors to provide inspection or other duties necessary to substantiate compliance with this code. Special inspectors shall demonstrate competence to the satisfaction of the enforcing agency for the particular type of inspection or task to be performed. In addition to other certifications or qualifications acceptable to the enforcing agency, the following certifications or education may be considered by the enforcing agency when evaluating the qualifications of a special inspector:

- Certification by a national or regional green building program or standard publisher.
- Certification by a statewide energy consulting or verification organization, such as HERS raters, building performance contractors, and home energy auditors.
- Successful completion of a third party apprentice training program in the appropriate trade.
- Other programs acceptable to the enforcing agency.

Notes:

- Special inspectors shall be independent entities with no financial interest in the materials or the project they are inspecting for compliance with this code.
- HERS raters are special inspectors certified by the California Energy Commission (CEC) to rate homes in California according to the Home Energy Rating System (HERS).

[BSC-CG] When required by the enforcing agency, the owner or the responsible entity acting as the owner's agent shall employ one or more special inspectors to provide inspection or other duties necessary to substantiate compliance with this code. Special inspectors shall demonstrate competence to the satisfaction of the enforcing agency for the particular type of inspection or task to be performed. In addition, the special inspector shall have a certification from a recognized state, national or international association, as determined by the local agency. The area of certification shall be closely related to the primary job function, as determined by the local agency.

Note: Special inspectors shall be independent entities with no financial interest in the materials or the project they are inspecting for compliance with this code.

703 VERIFICATIONS

703.1 DOCUMENTATION. Documentation used to show compliance with this code shall include but is not limited to, construction documents, plans, specifications, builder or installer certification, inspection reports, or other methods acceptable to the enforcing agency which demonstrate substantial compliance. When special documentation or special inspection is necessary to verify compliance, that method of compliance will be specified in the appropriate section or identified applicable checklist.